

BUKTI KORESPONDENSI PAPER PUBLISH
DI JURNAL COMPTON: JURNAL ILMIAH PENDIDIKAN FISIKA (SINTA 2)

 SINTA

Author Subjects Affiliations Sources FAQ WCU Registration Login



COMPTON: JURNAL ILMIAH PENDIDIKAN FISIKA
UNIVERSITAS SARJANAWIYATA TAMANSISWA
P-ISSN : 23560673 < > E-ISSN : 25795252 Subject Area : Science, Education

 **3.6875**
Impact

 **754**
Google Citations

 **Sinta 2**
Current Accreditation

 Google Scholar  Garuda  Website  Editor URL

History Accreditation



2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028
										

Garuda Google Scholar

Development of Electronic Student Worksheet of Physics Based on STEM on the Topic of Elasticity and Hooke's Law: Development of Electronic Student Worksheet of Physics Based on STEM on the Topic of Elasticity and Hooke's Law

Universitas Sarjanawiyata Tamansiswa COMPTON: Jurnal Ilmiah Pendidikan Fisika Vol 9 No 2 (2023): COMPTON: Jurnal Ilmiah Pendidikan Fisika 130-139

2023 DOI: 10.30738/cjipf.v9i2.15000 Accred : Sinta 4

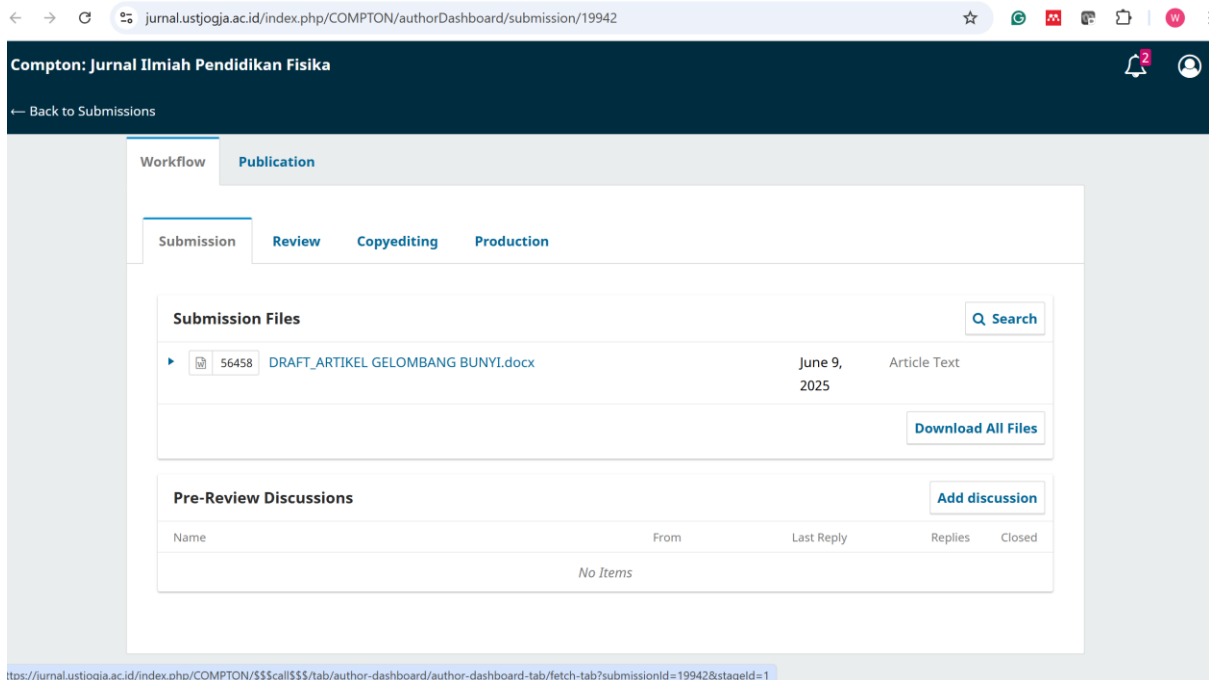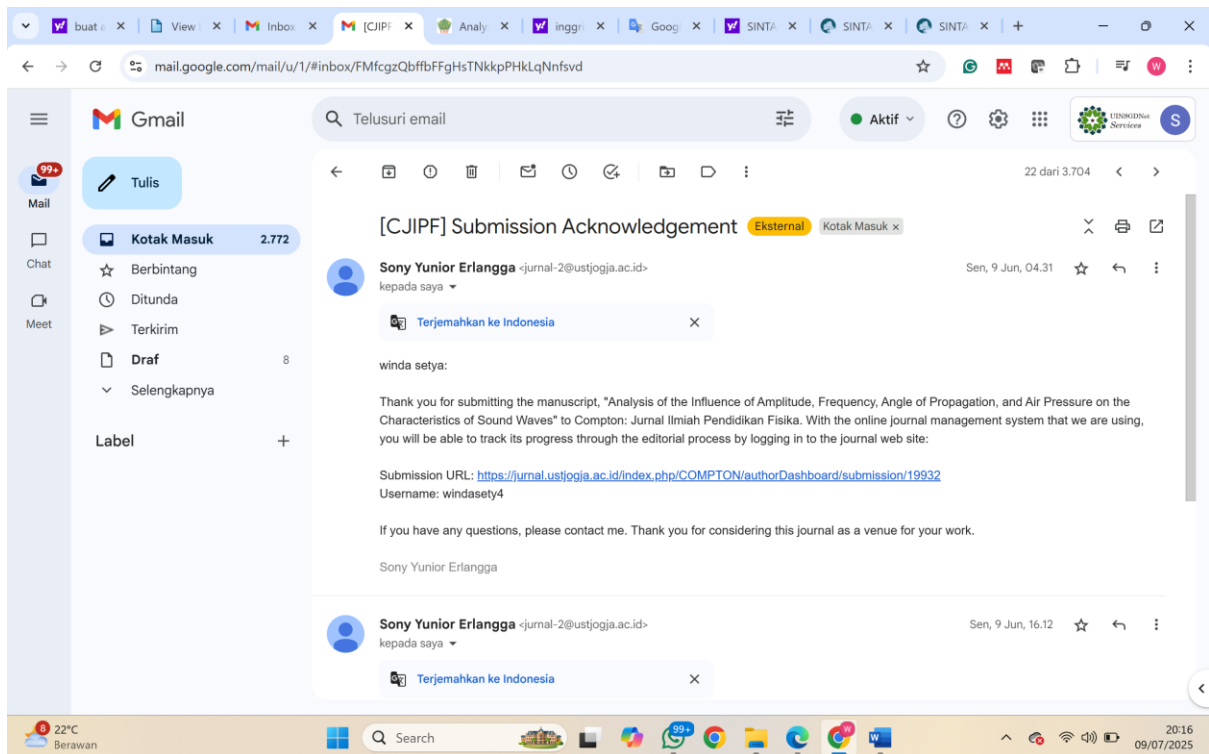

Analysis of the Influence of Amplitude, Frequency, Angle of Propagation, and Air Pressure on the Characteristics of Sound Waves

Winda Setya*, Ilman Azmi, Ikmal Konit Istiqomah, Dinaldhi Muhammad Aditya, Muhammad Minan Chusni

Program Studi Pendidikan Fisika, UIN Sunan Gunung Djati, Bandung, Indonesia

*Corresponding Author. E-mail: suratwindasetya@uinsgd.ac.id

Abstract: *This study aims to analyze the effect of amplitude, frequency, angle of propagation, and air pressure on the characteristics of sound waves using the PhET simulation. The method employed is a quantitative experiment with variations in amplitude and frequency at different measurement distances, observations of the reflection and interference patterns of waves at different propagation angles, and the effect of air pressure on sound intensity at varying pressures from 0.0 atm to 1.0 atm. The results show that the intensity of sound waves increases as amplitude and frequency rise, in accordance with the principle that intensity is directly proportional to the square of the amplitude. The angle of propagation affects the reflection and interference patterns of sound waves, resulting in different energy distributions at each angle. Air pressure also plays a significant role in the propagation of sound waves, with sound intensity increasing significantly as air pressure rises, emphasizing the importance of the medium for sound propagation.*

Keywords: Sound Waves, Amplitude, Frequency, Air Pressure, Interference Patterns

INTRODUCTION

A wave is a propagating vibration. Waves occur due to the presence of a vibration source and can carry energy as they propagate. Waves can be classified based on the direction of propagation and the medium through which they travel. Sound waves are waves that propagate in a longitudinal direction, consisting only of compressions and rarefactions, and require a mechanical medium to travel (Muhtar, 2022). Sound is a longitudinal wave formed within a medium, whether the medium is solid, liquid, or gas (Mulyaningsih, 2024).

Although longitudinal mechanical waves have a wide frequency range, only certain frequencies can be detected by the human auditory system—those capable of producing the sensation of sound in the ears and brain. Sound can be heard due to the vibration of an object that acts as the sound source. These vibrations cause the surrounding air to vibrate, and the disturbance then propagates through the air medium until it reaches the eardrum. Sound



waves are essentially periodic variations in air pressure along their path of propagation (Putri et al., 2024).

Sound waves occur when an object vibrates and the resulting vibrations affect the surrounding medium, creating regions of compression and rarefaction within the medium (Bosia et al., 2022). In this process, energy can transfer from one place to another or from one object to another, enabling longitudinal waves to travel through a medium (Machado, 2021). The displacement of molecules from their equilibrium position results in compressions and rarefactions. The maximum displacement or the greatest distance from the equilibrium point is referred to as the amplitude (Rismawan et al., 2023). In terms of molecular displacement, sound waves occur along a horizontal axis and take the form of compressions or rarefactions, which can be observed through pressure variations (Qowiyyah, 2022). The pressure of the medium increases during compressions, while it decreases during rarefactions (Li et al., 2021).

Sound waves possess fundamental properties common to all types of waves, such as interference, diffraction, refraction, and resonance (Rijal, 2024). Interference is a key wave characteristic that occurs when two or more sound waves meet and overlap in the same region, resulting in a new wave pattern (Siregar, 2022). Diffraction occurs when the direction of sound wave propagation changes as it passes around the edge or through an opening of a barrier, allowing it to spread into shadowed regions. The extent of diffraction largely depends on the relationship between the wavelength of the sound and the size of the obstacle. If the wavelength is larger than the obstacle, the diffraction effect becomes more pronounced (Kho, 2024). Resonance occurs when two objects share the same frequency. Additionally, when two waves with maximum amplitude meet and reinforce each other, they produce a loud humming sound (Widiansyah, 2021). The speed of sound wave propagation is influenced by its amplitude and frequency. However, since the speed of sound cannot be observed with the naked eye, simulations are needed to visualize it (Amelia et al., 2023). Sound can also be reflected, following the law of reflection, which states that the angle of incidence is equal to the angle of reflection. When sound is reflected, the following conditions apply: (1) the angle of incidence, the angle of reflection, and the normal line lie in the same plane; (2) the angle of incidence equals the angle of reflection (Afifah et al., 2025).

The study conducted by Rejeki (2024) examined the influence of amplitude and frequency on the speed of sound waves in air and water mediums using PhET simulations. The results showed that amplitude and frequency are directly proportional to the speed of sound wave propagation, and due to the higher particle density in water, sound waves travel faster in water compared to air. Amplitude determines the loudness of the sound; the greater the amplitude, the louder the sound and the higher the energy, since energy is proportional to the square of the amplitude. Meanwhile, frequency affects the pitch; a high frequency produces a sharp sound, while a low frequency produces a deep sound. In some cases, high frequencies also carry greater energy. Thus, amplitude and frequency play important roles in determining the characteristics and energy of sound waves.

The study conducted by Maulana (2020) found that changes in temperature and pressure affect the amplitude of ultrasonic waves in a liquid medium, which is directly related to the amount of acoustic energy transmitted (Maulana, 2020). Additionally, frequency is known to influence the perception of pitch and is closely related to the vibration pattern of the sound source. Frequency is one of the main physical parameters affecting human perception of pitch. This frequency is closely associated with the periodic vibration pattern produced by the sound source, where the higher the vibration frequency, the higher the pitch perceived by the human auditory system.

Finally, the study conducted by Fitri (2023) demonstrated that air pressure is closely related to the speed of sound propagation, as pressure affects the particle density within the air medium, thereby influencing how longitudinal waves travel (Fitri, 2023). On the other hand, the wave spreading angle can also alter the direction and intensity of sound wave energy received at different spatial points, although this aspect has not been extensively explored experimentally. Based on theoretical understanding and supported by these findings, an initial hypothesis was formulated that amplitude, frequency, spreading angle, and air pressure simultaneously influence the characteristics of sound waves, including their intensity, propagation speed, and direction of spreading. A review of several other articles suggests that amplitude is believed to play a role in determining the magnitude of sound intensity perceived by the listener.

This study utilized the PhET Simulation platform developed by the University of Colorado to conduct experiments. This simulation media comprises educational materials in physics, chemistry, and biology, and is designed interactively to enable users to learn virtually (Kurniawan et al., 2023). The simulation supports the learning of physics concepts through detailed and interactive visualizations (Ledjab et al., 2024). Besides PhET, another platform that can be employed in this research is Phyphox. Phyphox is an application developed by RWTH Aachen University that allows users to conduct physics experiments using built-in smartphone sensors, such as microphones, accelerometers, magnetometers, gyroscopes, and light sensors (Imtinan & Kuswanto, 2023).

This study aims to investigate the relationship between physical parameters—namely amplitude, frequency, spreading angle, and air pressure—and the characteristics of sound waves. The research was conducted virtually with the assistance of PhET simulations and the Phyphox application. The PhET simulation enables visualization of abstract concepts such as wave patterns and real-time changes in parameters. Phyphox is utilized to leverage sensors on smart devices for conducting experiments based on digital data.

METHOD

This study employs a quantitative approach with an experimental design to analyze the effects of amplitude, frequency, spreading angle, and air pressure on the characteristics of sound waves using PhET simulations (Eka, 2023). The quantitative approach in this research refers to the use of numerical data obtained from experiments to measure, analyze, and test the relationships among variables involved in the physical phenomenon of sound waves (Widyastuti et al., 2024). Through this approach, the study aims to produce data that can be statistically analyzed to identify patterns or trends in the variations of sound wave characteristics. PhET simulation was selected due to its capability to provide clear visual representations of the interactions among these physical factors, allowing researchers to manipulate variables directly and observe outcomes in a controlled and interactive environment. This approach offers the opportunity to explore complex acoustic phenomena, measure mathematical relationships between variables, and obtain data that can deepen the understanding of sound wave behavior under various physical conditions.

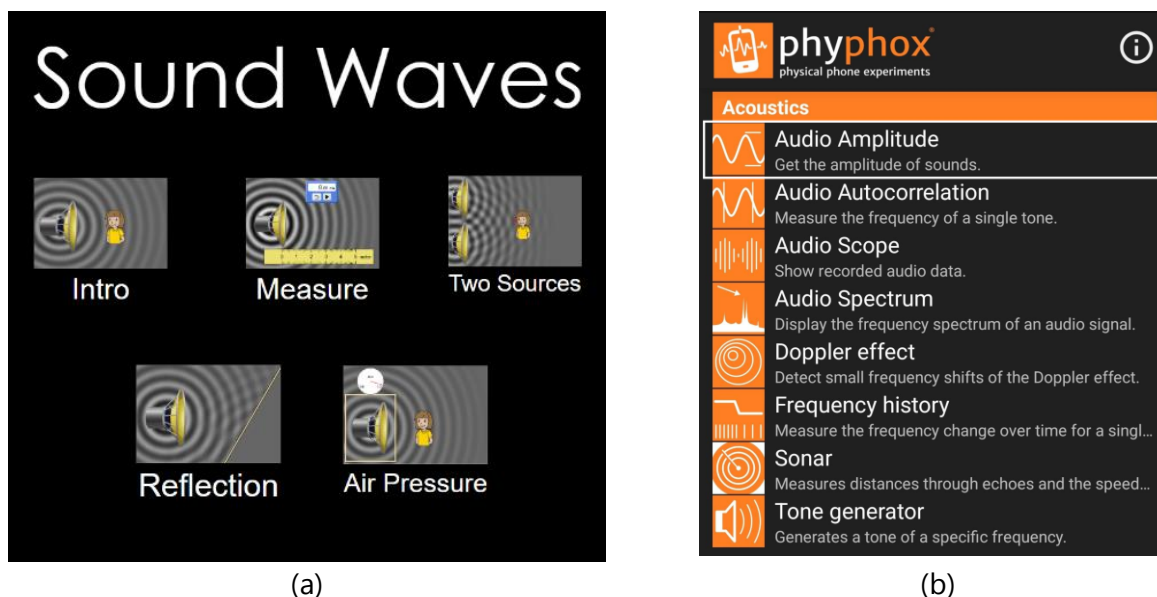


Figure 1. Application Interface. (a) *Sound Wave* experiment on PhET Simulation and (b) *Audio Amplitude Experiment* on the Phyphox application

The experiment began by accessing the "Sound" simulation on the PhET website, which is designed to test various factors influencing the characteristics of sound waves. In this experiment, the Phyphox application was used to assist in measuring the amplitude of the produced sound. First, an experiment was conducted to analyze the effect of amplitude and frequency on sound wave intensity, using three frequency levels: 600 Hz, 500 Hz, and 400 Hz. Each frequency was tested with three amplitude categories—maximum, medium, and minimum—to observe the changes in waveforms and sound intensity produced. Next, the experiment continued by observing the effects of sound waves generated by two nearby sound sources, taking into account the listener's position: left, right, and center. Three frequency variations—1000 Hz, 500 Hz, and 250 Hz—were tested with three amplitude categories (maximum, medium, and minimum) to observe changes in the characteristics of the sound wave at various positions, as shown in Figure 2.

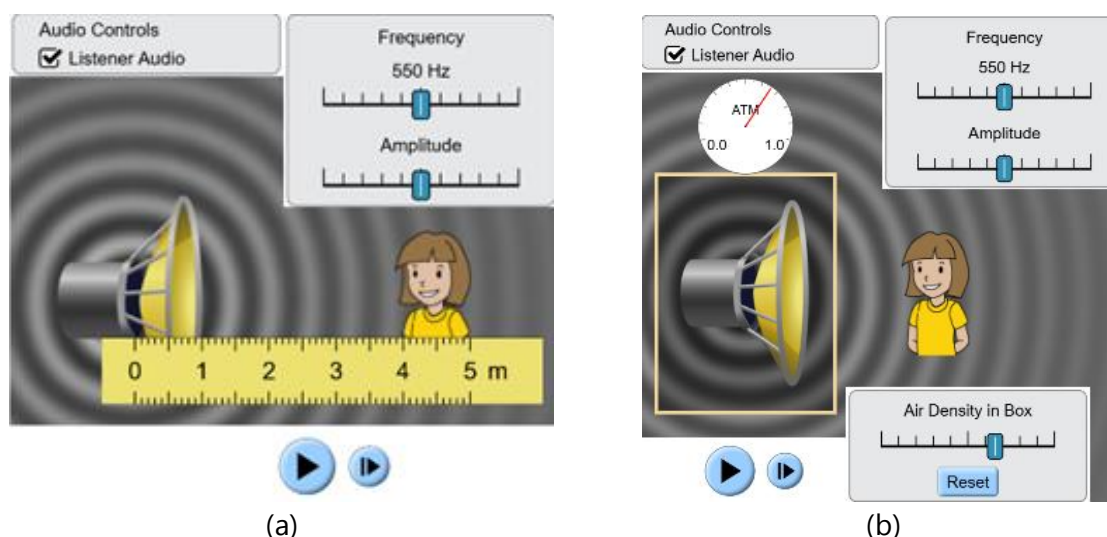


Figure 2. PhET Simulation Experiment Display. (a) Measure single sound, and (b) Measure double sound

Sound measurements were carried out using the Phyphox application by utilizing the *Audio Amplitude Experiment*. In this application, sound amplitude is displayed in decibels (dB). Measurements were conducted using the microphone sensor on the device, which functions to capture the intensity of the generated sound. Higher decibel values indicate greater sound amplitude, meaning the sound is louder or more powerful. Phyphox also provides real-time visual displays, which facilitate users in observing and analyzing changes in noise levels or sound intensity throughout the experiment. The interface of the *Audio Amplitude Experiment* in the Phyphox application is shown in Figure 3.

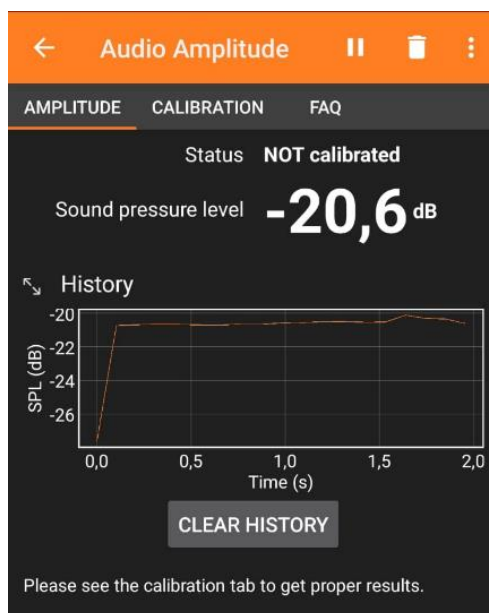


Figure 3. Interface of the Audio Amplitude Experiment in the Phyphox Application

Second, the experiment also analyzed the reflection and interference of sound waves resulting from the spreading angle. Observations were made on the effect of reflected sound waves at three different wall angles—0°, 45°, and 90°—using a frequency of 500 Hz and three amplitude categories: maximum, medium, and minimum. The experimental setup is shown in Figure 4(a). Observations of the maximum and minimum amplitude conditions revealed differences in wave patterns and sound characteristics produced at each of the three angles. Third, the experiment examined the effect of air pressure on the intensity of sound waves by adjusting the air pressure under different conditions, ranging from 0.0 atm to 1.0 atm, to observe changes in the speed and strength of the resulting sound waves. This experimental setup is presented in Figure 4(b). The results from all experiments provide a deeper understanding of the factors that influence the characteristics of sound waves and their applications in the context of acoustic theory and sound technology.

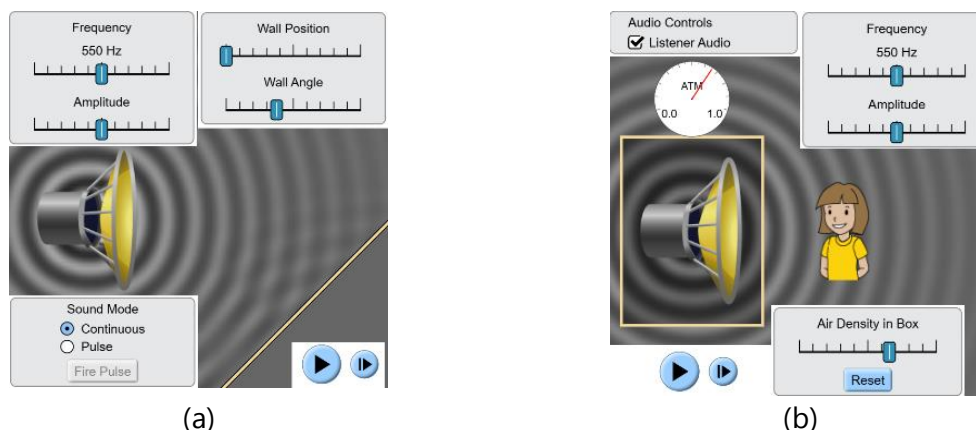


Figure 4. PhET Simulation Experiment Display. (a) Reflection, and (b) Air Pressure

The data obtained from this experiment were analyzed and presented in the form of graphs to facilitate understanding of the changes in sound wave characteristics influenced by variables such as amplitude, frequency, spreading angle, and air pressure. Each graph illustrates the relationship between the tested variables and the observed outcomes, such as the graph showing the relationship between sound intensity and amplitude, and the one between sound intensity and air pressure. The analysis was conducted by observing the upward trends of the graphs and comparing them with existing theories to determine whether the observations aligned with theoretical predictions (Muin, 2023). This approach enables the evaluation of the consistency between experimental data and fundamental physical concepts.

RESULTS AND DISCUSSION

The results of the experiment on the influence of amplitude and frequency on sound intensity at three different measurement distances are plotted in the relationship graphs presented in Figures 4, 5, and 6. Measurements were conducted at frequencies of 400 Hz, 500 Hz, and 600 Hz with amplitude variations ranging from 1 to 10. The study by Pinochet et al. (2021) has empirically demonstrated that the intensity of a sound wave is directly proportional to the square of its amplitude.

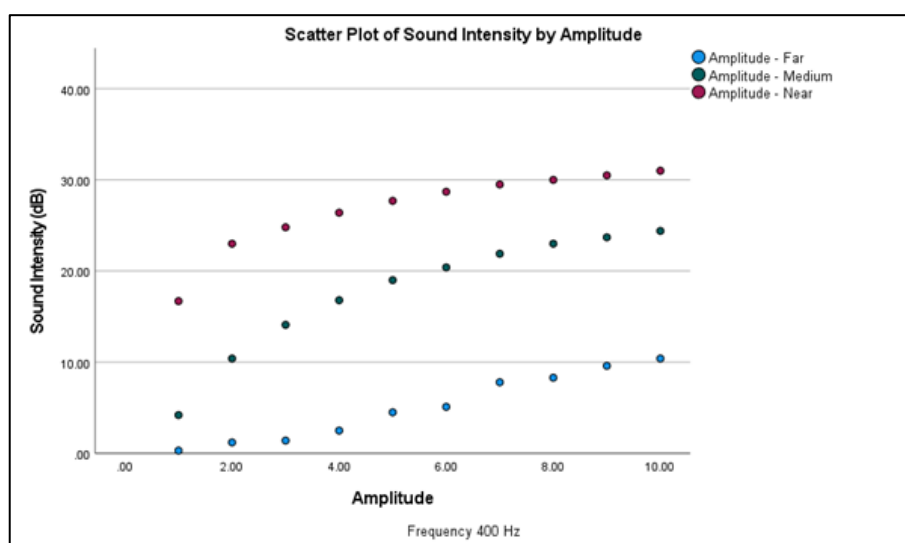


Figure 5. Graph of the Relationship Between Sound Intensity and Amplitude at a Frequency of 400 Hz

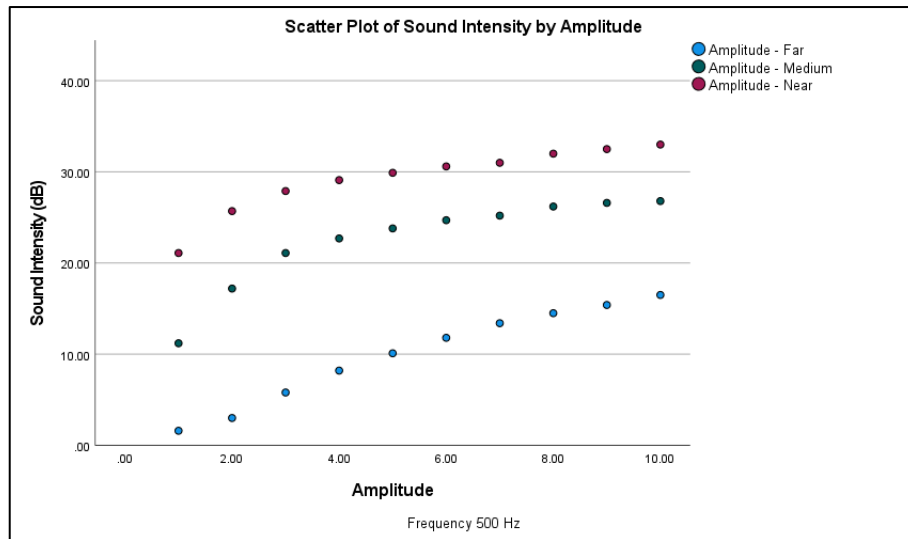


Figure 6. Graph of the Relationship Between Sound Intensity and Amplitude at a Frequency of 500 Hz

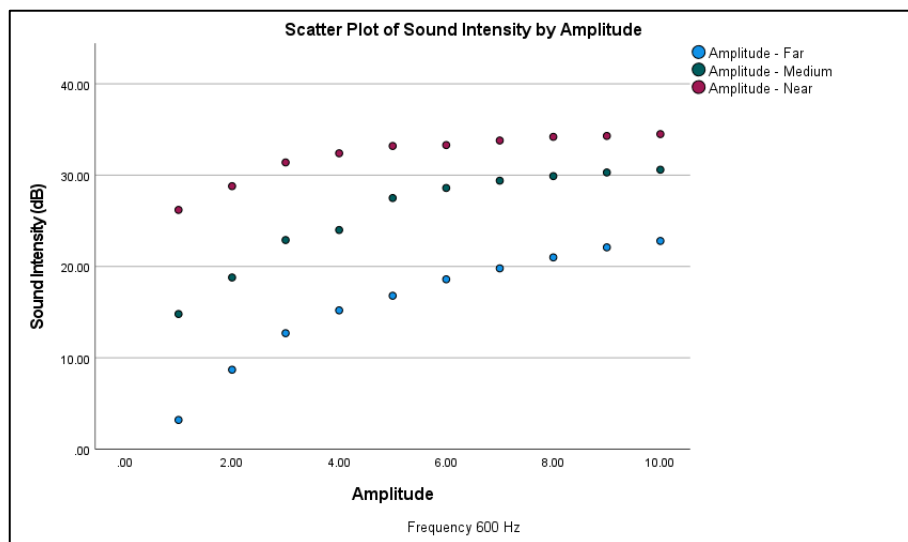


Figure 7. Graph of the Relationship Between Sound Intensity and Amplitude at a Frequency of 600 Hz

Sound intensity (dB) shows a clear positive trend with increasing amplitude for all measurement distances. The rate of dB increase appears steeper at low amplitudes and then slightly levels off at higher amplitudes, especially for the "Near" and "Medium" distances. The "Near" distance consistently exhibits the highest dB values, followed by "Medium," and then "Far," which shows the lowest dB values for each specific amplitude. A similar trend is observed at the frequency of 400 Hz, where sound intensity increases with amplitude for all distances. The absolute dB values at 500 Hz tend to be higher compared to 400 Hz for corresponding amplitudes and distances. The absolute dB values at 600 Hz generally produce higher dB levels than those at 400 Hz and 500 Hz for the same amplitude and distance. The leveling-off effect at high amplitudes is also evident. Overall, it is observed that increasing frequency consistently results in higher sound intensity (dB) at all amplitude levels and distances (Pinochet et al., 2021). Furthermore, attenuation of sound intensity due to distance is clearly seen, with stratification of intensity levels based on distance across all tests.

The results of the experiment on the effect of spreading angle on the reflection angle of sound waves are shown in Figure 8. Measurements were conducted at a frequency of 550 Hz with amplitude variations of 1, 5, and 10, and incidence angles of 90°, 45°, and 18°.

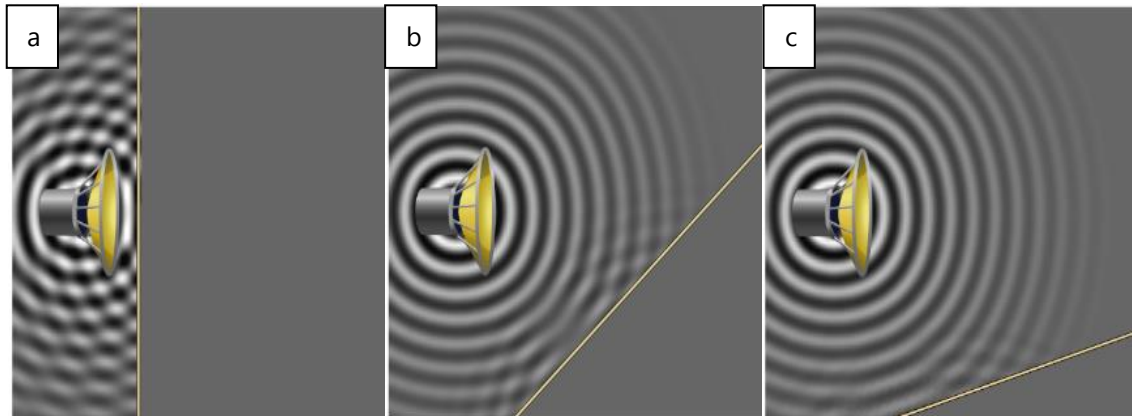


Figure 8. Reflection and Interference of Sound Waves Relative to Spreading Angle. (a) 90° Angle, (b) 45° Angle, (c) 18° Angle

Figure 8a shows waves appearing to radiate from the sound source and reflecting back from a vertical wall. The incident and reflected wavefronts are largely parallel, resulting in a clear superposition. Regions of constructive and destructive interference form a pattern resembling standing waves near the wall. When the wall is tilted, the incident waves strike the wall and reflect at an angle. The reflected waves interact clearly with the subsequent incident waves. The interference pattern is more complex compared to Figure 8b, with different regions of constructive and destructive interference forming an oblique pattern. A wall at a steeper angle produces distinct reflections and interference patterns. The areas of constructive and destructive interference differ from those in Figure 8c, illustrating how the angle of the reflecting surface determines the spatial distribution of the interference field (Zagubień & Wolniewicz, 2024).

The results of the experiment on the effect of air pressure on sound intensity are plotted in the graph presented in Figure 9. Measurements were conducted at a frequency of 550 Hz with amplitude variations of 1, 5, and 10, and air pressure ranging from 0.0 atm to 1.0 atm.

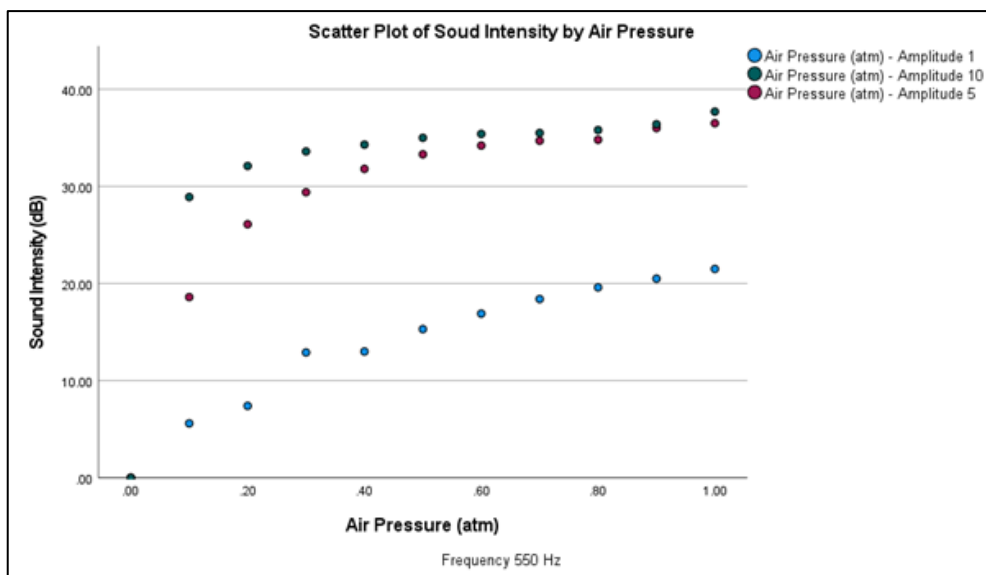


Figure 9. Graph of the Relationship Between Sound Intensity and Air Pressure

Figure 9 shows that for all three amplitude levels, the sound intensity is 0.0 dB at an air pressure of 0.0 atm. As air pressure increases, the sound intensity (dB) rises significantly (Pinochet et al., 2021). The most rapid increase occurs at low pressure levels, after which the rate of increase in dB becomes less steep, although the intensity continues to rise. Higher amplitudes consistently produce higher dB values at every air pressure above zero. This confirms that a medium is necessary for the propagation of sound waves, and the relationship between air pressure and sound intensity (dB) is nonlinear (Costa et al., 2023).

Analysis of the Influence of Amplitude and Frequency on Sound Wave Intensity

The research results show that the sound intensity increases along with the increase in amplitude. This finding aligns with the basic principle that the intensity (I) of a wave is proportional to the square of its amplitude (A). This means that doubling the amplitude results in an increase in intensity (power per unit area) by a factor of four. The decibel (dB) scale is logarithmic and is used to express the ratio between a certain amplitude value and a reference value. The general formula for calculating decibels is:

$$dB = 10 \log_{10} \frac{P}{P_0} \quad (1)$$

Where P is the power or sound intensity being measured, and P_0 is the reference power or intensity, which is usually the human hearing threshold of 10^{-12} watts per square meter (watt/m^2). Sound intensity measurements using the Phyphox application can show both positive and negative values. Positive values ($dB > 0$) indicate that the sound amplitude is greater than the reference value, meaning the sound is loud or strong, such as a car horn reaching around 100 dB. A zero value ($dB = 0$) means the sound amplitude is equal to the reference value. This does not mean there is no sound, but rather a very faint sound exactly at the threshold of human hearing. Negative values ($dB < 0$) indicate that the sound amplitude is less than the reference value, meaning the sound is very weak or almost inaudible, like a soft whisper in a very quiet room.

Consequently, although the actual sound energy increases significantly with amplitude, the perceived loudness (related to dB) increases more slowly (ZagubieŃ & Wolniewicz, 2024). The "flattening" phenomenon observed in the dB versus Amplitude graphs (Figures 4, 5, 6) at higher amplitudes is a manifestation of logarithmic scaling (Fajarwati et al., 2023). For example, an increase in intensity from $10^{-6} \text{ W}/\text{m}^2$ to $10^{-5} \text{ W}/\text{m}^2$ (a tenfold increase) corresponds to a 10 dB. However, an increase from $10^{-3} \text{ W}/\text{m}^2$ to $2 \times 10^{-3} \text{ W}/\text{m}^2$ (a twofold increase) only corresponds to an increase of about 3 dB. This explains why large changes in amplitude at high intensity levels result in smaller dB increases compared to similar proportional changes at low intensity levels (Fajarwati et al., 2023). For instance, if the amplitude is doubled, the intensity increases fourfold, and the change in dB would be:

$$10 \log(4I_1/I_0) - 10 \log(I_1/I_0) = 10 \log(4) \approx 6 \text{ dB} \quad (2)$$

The experimental data also show that for a constant amplitude, higher frequencies generally produce higher sound intensities. This is consistent with the theoretical relationship:

$$I = \frac{1}{2} \rho v (\omega s_{\max})^2 \quad (3)$$

where $\omega = 2\pi f$ is the angular frequency and $s_{\max}$ is the maximum displacement amplitude. For a constant amplitude, the intensity is proportional to the square of the frequency. A higher frequency means more wave cycles pass a point per unit time. If the displacement per

cycle (amplitude) is the same, then more cycles imply more energy delivered per unit time, resulting in higher power and intensity (Costa et al., 2023).

Analysis of Reflection and Interference of Waves Due to Angle of Propagation

Experimental data consistently show that the angle of incidence equals the angle of reflection for various amplitudes and angles of incidence. Figure 8 clearly illustrates the phenomenon of wave interference resulting from the superposition of incident and reflected sound waves. The incident sound waves travel from the left or right direction, while the reflected waves, originating from the reflection surface, travel from the opposite direction. When these two waves meet and interact, superposition occurs—this is the combination of two waves producing a new wave pattern called a standing wave. In a standing wave, two important types of points are formed: nodes and antinodes. Nodes (●) are points along the wave where the amplitude is always zero. This happens because the incident and reflected waves meet out of phase (phase difference of 180°), canceling each other out (minimum amplitude), a condition known as destructive interference. Destructive interference occurs when $\Delta s = (n + 1/2)\lambda$ where Δs is the path difference between the two waves, λ is the wavelength of the sound, and n is an integer ($n = 1, 2, 3, \dots$). Conversely, antinodes are points where the wave amplitude reaches its maximum. These points form when the two waves meet in phase, reinforcing each other's amplitude, resulting in constructive interference. Constructive interference occurs when $\Delta s = n\lambda$. The resulting standing wave pattern shows that the distance between two consecutive nodes or two consecutive antinodes is half a wavelength ($\lambda/2$).

Figure 8a shows clear constructive and destructive interference, forming a pattern resembling standing waves. This occurs because the incident and reflected waves move directly in opposite directions, creating fixed points with maximum and minimum displacements (Mahardhika & Darsono, 2024). Figures 8b and 8c demonstrate how changes in the angle of the reflecting surface alter the geometry of the interference pattern. The regions of constructive and destructive interference are spatially redistributed according to the reflection angle, creating more complex, tilted fringe patterns. This happens because the path difference between the incident and reflected waves arriving at a given point changes as the reflection angle varies.

Analysis of the Effect of Air Pressure on Sound Wave Intensity

Experimental results show that the sound intensity is zero at zero air pressure, regardless of the source amplitude. This confirms that sound, as a mechanical wave, requires a medium for propagation. Without air particles to oscillate and transfer energy, sound cannot propagate (Vishnu et al., 2023).

The sound intensity (I) is related to the pressure amplitude of the sound wave (Δp_{sound}), the density of the medium (ρ), and the speed of sound in the medium (v) through the equation:

$$I = \frac{(\Delta p_{\text{sound}})^2}{2\rho v} \quad (4)$$

The term ρv is the characteristic acoustic impedance (Z) of the medium. Air pressure is directly related to air density (ρ) assuming constant temperature, through the ideal gas law. As air pressure increases, density increases, resulting in higher acoustic impedance.

The graph in Figure 9 shows that as air pressure increases from zero, sound intensity also rises significantly. This indicates a more efficient energy transfer from the sound source to the

medium and through the medium. At very low pressure, the medium is sparse, leading to poor energy transfer. As pressure increases, the medium becomes denser, allowing for better coupling and more effective propagation of sound energy. Sound is a vibration of particles; more particles mean the transfer of vibrational energy is more efficient (Costa et al., 2023). Acoustic impedance represents the medium's resistance to acoustic flow. The data shows intensity increases with pressure, indicating the medium's improved capacity to carry sound energy. A study by Vishnu et al. (2023) on underwater noise emissions, although in a different medium, underscores the importance of the medium's properties in sound generation and propagation.

The observed non-linear increase in dB with rising air pressure (Figure 9) can be attributed to fundamental physics and the logarithmic nature of the dB scale. Even the presence of a small amount of medium initially allows sound propagation, leading to a large relative increase from zero intensity. As pressure (and density) continues to increase, the absolute intensity keeps rising, but the dB increment becomes smaller for equivalent linear changes in pressure, especially if the relationship between pressure and actual intensity itself is non-linear (Pinochet et al., 2021). Research on sound propagation under various atmospheric conditions often considers the effects of pressure, temperature, and humidity on absorption and speed, which in turn influence intensity over distance.

Implications of Research Based on PhET Simulations

Simulation using PhET allows controlled manipulation of variables and visualization of concepts that are difficult to observe directly in traditional laboratories. The effectiveness of PhET in enhancing conceptual understanding has been documented in various studies (Nuryantini et al., 2021). However, PhET simulations are idealizations of real-world conditions. The simulations may not account for all factors affecting sound propagation, such as air turbulence, complex reflections from uneven surfaces, or the full spectrum of atmospheric absorption effects. The representation of wave interactions and medium properties may be simplified. For example, the exact algorithm by which the "amplitude" setting in PhET translates to physical displacement or pressure amplitude, and how "air pressure" affects density and sound speed, might involve underlying assumptions not fully transparent to users. Additionally, the simulation may not include all relevant variables that can influence sound characteristics in real-world scenarios, such as humidity and temperature gradients (Nuryantini et al., 2021).

Advantages of the simulation include its ability to isolate variables and demonstrate core principles. However, this control comes at the cost of potentially oversimplifying the rich acoustic complexities of the real world. PhET aims to effectively teach fundamental concepts by simplifying reality and removing distracting variables (Mahardhika & Darsono, 2024). For example, in reflection simulations, the walls are likely perfect reflectors, and the medium is perfectly homogeneous. In reality, surfaces absorb and scatter sound, and the air exhibits micro variations. This means that although the simulation accurately demonstrates the principles of reflection and interference, precise quantitative results may differ from physical experiments due to real-world imperfections. Findings from the simulation should be understood as illustrations of fundamental concepts, and caution is necessary when directly extrapolating quantitative results to specific and complex real-world applications without further validation (Nuryantini et al., 2021). This research could be expanded by comparing simulation results with physical experiments or more advanced computational acoustic models to assess the degree of idealization within PhET.

CONCLUSION



The results show that sound intensity increases non-linearly on the decibel scale as amplitude and frequency increase. Larger amplitudes produce higher wave energy, while higher frequencies accelerate the rate of energy transfer. The reflection angle equals the angle of incidence, in accordance with the law of reflection, and the scattering angle influences the complex interference patterns caused by the superposition of incident and reflected waves. Increasing air pressure leads to a non-linear increase in sound intensity. The PhET simulation is effective in visualizing fundamental acoustic principles, although it has limitations due to the idealization of conditions. Therefore, further research combining simulations, physical experiments, and advanced computational modeling is recommended to gain a more comprehensive understanding of acoustic phenomena in the real world.

REFERENCES

- Amelia, N., Kusumaningtyas, N. C., HF, A. R., Sulistiyowati, A., & Mufida, J. (2023). Rancang Bangun Alat Praktikum Resonansi Bunyi Dengan Menentukan Cepat Rambat Bunyi Di Udara Pada Pipa Kecil dan Pipa Besar. *Jurnal Ilmiah Wahana Pendidikan*, 9(14), 546-552.
- Bosia, F., Dal Poggetto, V. F., Gliozzi, A. S., Greco, G., Lott, M., Miniaci, M., Ongaro, F., Onorato, M., Seyyedizadeh, S.F., Tortello, M. & Pugno, N. M. (2022). Optimized structures for vibration attenuation and sound control in nature: A review. *Matter*, 5(10), 3311-3340.
- Costa, J. P., Baptista, M., Conceição, T., & Maurício, P. (2023). Construct map development for the propagation of sound in the air. *EURASIA Journal of Mathematics, Science and Technology Education*, 19(9), em2327.
- Eka, O. (2023). *Pengembangan e-modul fisika pada materi gelombang berbasis mitigasi kebencanaan di SMA/MA kelas XI*. (Doctoral dissertation, UIN Raden Intan Lampung).
- Fajarwati, L., Feriadi, Y., & Widjiati, E. (2023). Underwater Acoustic Intensity Analysis using Noise Assisted-MEMD with Varying Distances. *Jurnal Teknik Elektro*, 15(1), 24-29.
- Fitri, N. A., Sa'adah, N., Fikriya, S., Suryandari, K. C., & Fatimah, S. (2023). Analisis Gelombang Bunyi Melalui Alat Peraga Sederhana dan Relevansinya dalam Pembelajaran di SD. In *Social, Humanities, and Educational Studies (SHES): Conference Series* (Vol. 6, No. 1, pp. 617-624).
- Kho, W. K. (2014). Studi material bangunan yang berpengaruh pada akustik interior. *Dimensi Interior*, 12(2), 57-64.
- Kurniawan, A., Herlinawati, H., & Marasabessy, R. (2024). Pemanfaatan PhET colorado untuk meningkatkan hasil belajar siswa pada materi rangkaian listrik. *Asian Journal Collaboration of Social Environmental and Education*, 1(2).
- Ledjab, F. A. W., Koli, K., Tahu, M. V. F., & Dewa, E. (2024). Inovasi Pembelajaran Fisika: Integrasi Problem Based Learning dan Simulasi PhET pada Materi Gelombang Bunyi. *MAGNETON: Jurnal Inovasi Pembelajaran Fisika*, 2(2), 112-119.
- Li, M., Wang, M., Ding, R., Deng, T., Fang, S., Lai, F., & Luo, R. (2021). Study of acoustic emission propagation characteristics and energy attenuation of surface transverse wave and internal longitudinal wave of wood. *Wood Science and Technology*, 55, 1619-1637.
- Machado, M. R., & Dos Santos, J. M. C. (2021). Effect and identification of parametric distributed uncertainties in longitudinal wave propagation. *Applied Mathematical Modelling*, 98, 498-517.

- Mahardhika, S. R., & Darsono, T. (2024). Pengembangan Modul Praktikum Interferensi Gelombang Bunyi Berbantuan Visual Analyser. *Unnes Physics Education Journal*, 13(1), 9-14.
- Maulana, S. (2020). Pengaruh Perubahan Temperatur terhadap Respon Amplitudo dengan Menggunakan Gelombang Ultrasonik pada Pola Aliran Slug Pipa Horisontal. *Jurnal Inovasi Mesin*, 2(2), 43-50.
- Muhtar, E. (2022). Pengaruh Pendekatan Ketrampilan Proses Dalam Meningkatkan Hasil Belajar Fisika Pada Konsep Getaran Dan Gelombang Pada Peserta Didik Kelas VIII SMP Negeri 17 Halmahera Selatan. *KUANTUM: Jurnal Pembelajaran Dan Sains Fisika*, 3(1), 38-62.
- Muin, M. P. (2023). *Metode penelitian kuantitatif*. CV Literasi Nusantara Abadi.
- Mulyaningsih, R. S. (2024). Effect of amplitude and frequency on the speed of sound waves in air and water using PhET simulation. *Jurnal Pendidikan dan Ilmu Fisika*, 4(1), 40.
- Nuryantini, A. Y., Zakwandi, R., & Ariyuda, M. A. (2021). Home-made simple experiment to measure sound intensity using smartphones. *Jurnal Ilmiah Pendidikan Fisika Al-Biruni*, 10(1), 159-166.
- Pinochet, J., Cortada, W. B., & Peña, M. S. (2021). Graphic relation between amplitude and sound intensity level. *The Physics Teacher*, 59(6), 467-469.
- Qowiyyah, S. N. (2022). Kemakbulan Doa dalam Perspektif Al-Qur'an dan Fisika Gelombang. *Qaf: Jurnal Ilmu Al-Qur'an dan Tafsir*, 4(1), 45-67.
- Rijal, M. (2024). *Pengembangan Buku Saku Elektronik Berbasis Google Sites pada Materi Gelombang Bunyi dan Cahaya Tingkat SMA/MA* (Doctoral dissertation, UIN Ar-Raniry Banda Aceh).
- Rismawan, H., & Aisiyah, M. C. (2023). Menentukan Nilai Periode, Amplitudo, Frekuensi Dan Memvisualisasi Getaran Harmonik Pada Pegas Dalam Bentuk Gelombang. *Jurnal Fisika: Fisika Sains Dan Aplikasinya*, 8(1), 25-29.
- Siregar, D. A. (2022). Pengaruh penggunaan metode demonstrasi terhadap hasil belajar fisika siswa pada materi pokok gelombang bunyi kelas XII di SMA Negeri Batang Onang. *Jurnal Physics Education (PhysEdu)*, 4(3), 11.
- Vishnu, H., Deane, G. B., Glowacki, O., Chitre, M., Johnson, H., Moskalik, M., & Stokes, D. (2023). Depth-dependence of the underwater noise emission from melting glacier ice. *JASA Express Letters*, 3(2).
- Widiansyah, M. G. (2021). Tutorial Praktikum Resonansi Gelombang Bunyi Menggunakan Teknologi Augmented Reality Dan Metode Fuzzy Mamdani. *Universitas Komputer Indonesia*.
- Zagubieć, A., & Wolniewicz, K. (2024). Measurements and Analysis of Sound Reflections from Selected Building Façades. *Applied Sciences*, 14(24), 11627.

REVIEW

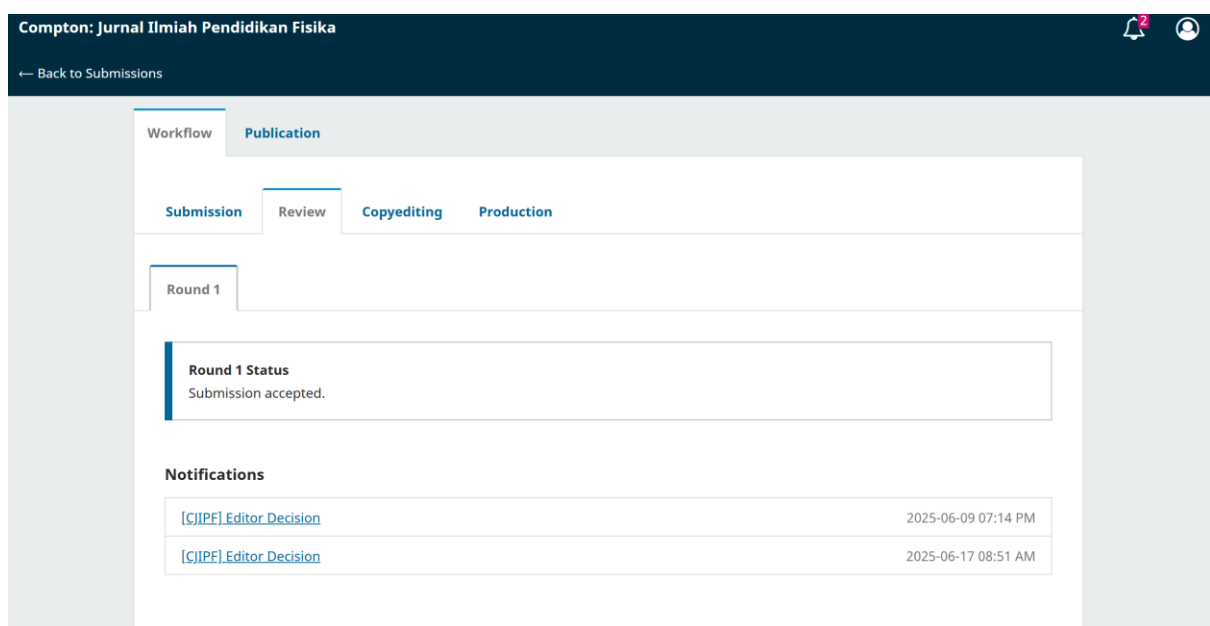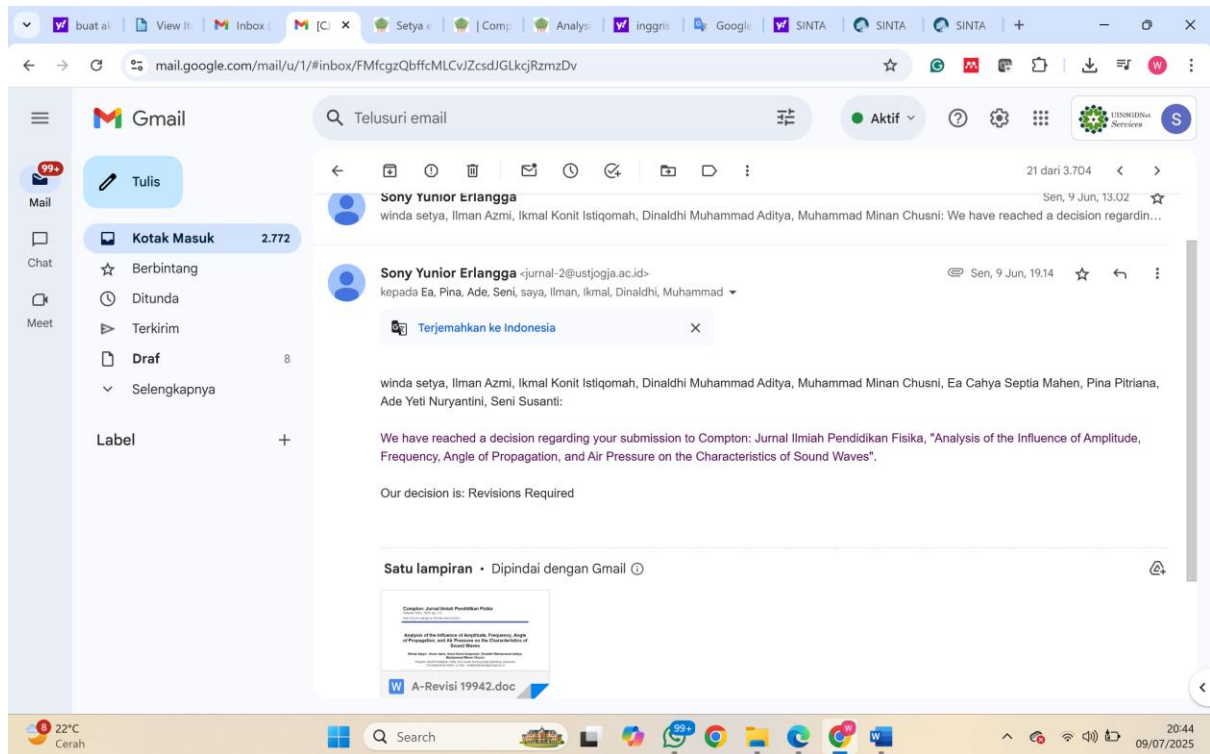

[← Back to Submissions](#)

Reviewer's Attachments

[Search](#)

 56493 [Revisi 19942.doc](#)

June 9,
2025

Revisions

[Search](#)

[Upload File](#)

▶  56598 [DRAFT REVISI ARTIKEL GELOMBANG BUNYI.doc](#)

June 11,
2025 Article Text

Review Discussions

[Add discussion](#)

Name	From	Last Reply	Replies	Closed
perbaikan	sony_erlangga 2025-06-09 07:15 PM	windasety4 2025-06-16 05:03 PM	1	☐
▶ perbaikan	windasety4 2025-06-16 05:06 PM	-	0	☐
APC	sony_erlangga 2025-06-16 07:33 PM	windasety4 2025-06-17 04:38 AM	1	☐

Analysis of the Influence of Amplitude, Frequency, Angle of Propagation, and Air Pressure on the Characteristics of Sound Waves

Winda Setya*, Iman Azmi, Ikmal Konit Istiqomah, Dinaldhi Muhammad Aditya, Muhammad Minan Chusni

Program Studi Pendidikan Fisika, UIN Sunan Gunung Djati, Bandung, Indonesia

*Corresponding Author. E-mail: suratwindasetya@uinsgd.ac.id

Abstract: *This study aims to analyze the effect of amplitude, frequency, angle of propagation, and air pressure on the characteristics of sound waves using the PhET simulation. The method employed is a quantitative experiment with variations in amplitude and frequency at different measurement distances, observations of the reflection and interference patterns of waves at different propagation angles, and the effect of air pressure on sound intensity at varying pressures from 0.0 atm to 1.0 atm. The results show that the intensity of sound waves increases as amplitude and frequency rise, in accordance with the principle that intensity is directly proportional to the square of the amplitude. The angle of propagation affects the reflection and interference patterns of sound waves, resulting in different energy distributions at each angle. Air pressure also plays a significant role in the propagation of sound waves, with sound intensity increasing significantly as air pressure rises, emphasizing the importance of the medium for sound propagation.*

Keywords: Sound Waves, Amplitude, Frequency, Air Pressure, Interference Patterns

INTRODUCTION

A wave is a propagating vibration. Waves occur due to the presence of a vibration source and can carry energy as they propagate. Waves can be classified based on the direction of propagation and the medium through which they travel. Sound waves are waves that propagate in a longitudinal direction, consisting only of compressions and rarefactions, and require a mechanical medium to travel (Muhtar, 2022). Sound is a longitudinal wave formed within a medium, whether the medium is solid, liquid, or gas (Mulyaningsih, 2024).

Although longitudinal mechanical waves have a wide frequency range, only certain frequencies can be detected by the human auditory system—those capable of producing the sensation of sound in the ears and brain. Sound can be heard due to the vibration of an object that acts as the sound source. These vibrations cause the surrounding air to vibrate, and the disturbance then propagates through the air medium until it reaches the eardrum.

Commented [L1]: •Specify the sample size or simulation parameters (e.g., "3 frequency levels, 3 amplitude categories").
•Quantify key findings (e.g., "Sound intensity increased by X dB per Y atm pressure rise").
•Clarify the novelty (e.g., "First study to integrate PhET and Phyphox for sound wave analysis").

Commented [L2]: •Literature Gap:
◦Strengthen the justification for studying air pressure and angle of propagation, as these are less explored compared to amplitude/frequency. Cite specific gaps (e.g., "Prior studies like Rejeki (2024) focused on water/air media but omitted pressure effects").
•Theoretical Framework:
◦Explicitly link sound wave properties to wave mechanics theories (e.g., Helmholtz equation for interference).
•Objectives:
◦Rephrase as hypotheses (e.g., "H1: Air pressure and sound intensity exhibit a nonlinear relationship").



Sound waves are essentially periodic variations in air pressure along their path of propagation (Putri et al., 2024).

Sound waves occur when an object vibrates and the resulting vibrations affect the surrounding medium, creating regions of compression and rarefaction within the medium (Bosia et al., 2022). In this process, energy can transfer from one place to another or from one object to another, enabling longitudinal waves to travel through a medium (Machado, 2021). The displacement of molecules from their equilibrium position results in compressions and rarefactions. The maximum displacement or the greatest distance from the equilibrium point is referred to as the amplitude (Rismawan et al., 2023). In terms of molecular displacement, sound waves occur along a horizontal axis and take the form of compressions or rarefactions, which can be observed through pressure variations (Qowiyyah, 2022). The pressure of the medium increases during compressions, while it decreases during rarefactions (Li et al., 2021).

Sound waves possess fundamental properties common to all types of waves, such as interference, diffraction, refraction, and resonance (Rijal, 2024). Interference is a key wave characteristic that occurs when two or more sound waves meet and overlap in the same region, resulting in a new wave pattern (Siregar, 2022). Diffraction occurs when the direction of sound wave propagation changes as it passes around the edge or through an opening of a barrier, allowing it to spread into shadowed regions. The extent of diffraction largely depends on the relationship between the wavelength of the sound and the size of the obstacle. If the wavelength is larger than the obstacle, the diffraction effect becomes more pronounced (Kho, 2024). Resonance occurs when two objects share the same frequency. Additionally, when two waves with maximum amplitude meet and reinforce each other, they produce a loud humming sound (Widiansyah, 2021). The speed of sound wave propagation is influenced by its amplitude and frequency. However, since the speed of sound cannot be observed with the naked eye, simulations are needed to visualize it (Amelia et al., 2023). Sound can also be reflected, following the law of reflection, which states that the angle of incidence is equal to the angle of reflection. When sound is reflected, the following conditions apply: (1) the angle of incidence, the angle of reflection, and the normal line lie in the same plane; (2) the angle of incidence equals the angle of reflection (Afifah et al., 2025).

The study conducted by Rejeki (2024) examined the influence of amplitude and frequency on the speed of sound waves in air and water mediums using PhET simulations. The results showed that amplitude and frequency are directly proportional to the speed of sound wave propagation, and due to the higher particle density in water, sound waves travel faster in water compared to air. Amplitude determines the loudness of the sound; the greater the amplitude, the louder the sound and the higher the energy, since energy is proportional to the square of the amplitude. Meanwhile, frequency affects the pitch; a high frequency produces a sharp sound, while a low frequency produces a deep sound. In some cases, high frequencies also carry greater energy. Thus, amplitude and frequency play important roles in determining the characteristics and energy of sound waves.

The study conducted by Maulana (2020) found that changes in temperature and pressure affect the amplitude of ultrasonic waves in a liquid medium, which is directly related to the amount of acoustic energy transmitted (Maulana, 2020). Additionally, frequency is known to influence the perception of pitch and is closely related to the vibration pattern of the sound source. Frequency is one of the main physical parameters affecting human perception of pitch. This frequency is closely associated with the periodic vibration pattern produced by

the sound source, where the higher the vibration frequency, the higher the pitch perceived by the human auditory system.

Finally, the study conducted by Fitri (2023) demonstrated that air pressure is closely related to the speed of sound propagation, as pressure affects the particle density within the air medium, thereby influencing how longitudinal waves travel (Fitri, 2023). On the other hand, the wave spreading angle can also alter the direction and intensity of sound wave energy received at different spatial points, although this aspect has not been extensively explored experimentally. Based on theoretical understanding and supported by these findings, an initial hypothesis was formulated that amplitude, frequency, spreading angle, and air pressure simultaneously influence the characteristics of sound waves, including their intensity, propagation speed, and direction of spreading. A review of several other articles suggests that amplitude is believed to play a role in determining the magnitude of sound intensity perceived by the listener.

This study utilized the PhET Simulation platform developed by the University of Colorado to conduct experiments. This simulation media comprises educational materials in physics, chemistry, and biology, and is designed interactively to enable users to learn virtually (Kurniawan et al., 2023). The simulation supports the learning of physics concepts through detailed and interactive visualizations (Ledjab et al., 2024). Besides PhET, another platform that can be employed in this research is Phyphox. Phyphox is an application developed by RWTH Aachen University that allows users to conduct physics experiments using built-in smartphone sensors, such as microphones, accelerometers, magnetometers, gyroscopes, and light sensors (Imtinan & Kuswanto, 2023).

This study aims to investigate the relationship between physical parameters—namely amplitude, frequency, spreading angle, and air pressure—and the characteristics of sound waves. The research was conducted virtually with the assistance of PhET simulations and the Phyphox application. The PhET simulation enables visualization of abstract concepts such as wave patterns and real-time changes in parameters. Phyphox is utilized to leverage sensors on smart devices for conducting experiments based on digital data.

METHOD

This study employs a quantitative approach with an experimental design to analyze the effects of amplitude, frequency, spreading angle, and air pressure on the characteristics of sound waves using PhET simulations (Eka, 2023). The quantitative approach in this research refers to the use of numerical data obtained from experiments to measure, analyze, and test the relationships among variables involved in the physical phenomenon of sound waves (Widyastuti et al., 2024). Through this approach, the study aims to produce data that can be statistically analyzed to identify patterns or trends in the variations of sound wave characteristics. PhET simulation was selected due to its capability to provide clear visual representations of the interactions among these physical factors, allowing researchers to manipulate variables directly and observe outcomes in a controlled and interactive environment. This approach offers the opportunity to explore complex acoustic phenomena, measure mathematical relationships between variables, and obtain data that can deepen the understanding of sound wave behavior under various physical conditions.

Commented [L3]: •Experimental Design:

- Justify the choice of frequencies (400/500/600 Hz) and pressures (0–1 atm). Are these ranges ecologically relevant?
- Describe how "Near/Medium/Far" distances were operationalized (exact cm/m values).

•Tools:

- Detail Phyphox's microphone specifications (sensitivity, sampling rate) to validate dB measurements.
- Clarify if PhET's "amplitude" setting corresponds to displacement or pressure amplitude.

•Data Analysis:

- Specify statistical tests used (e.g., ANOVA for amplitude-frequency interactions).

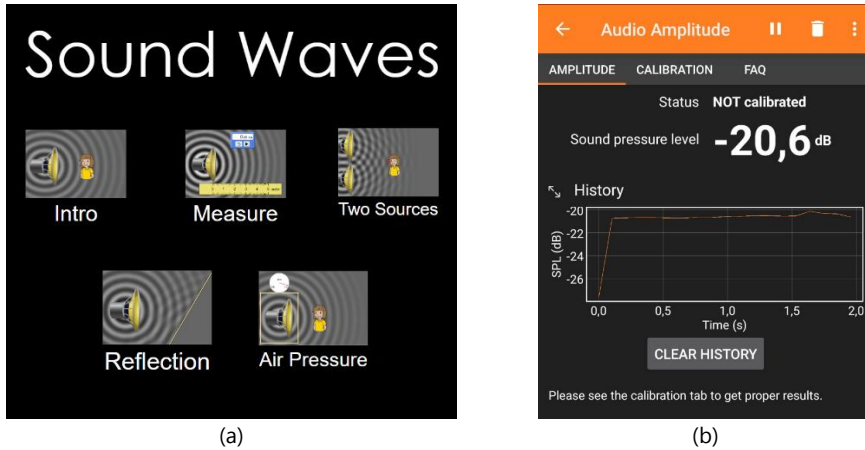


Figure 1. Application Interface. (a) *Sound Wave* experiment on PhET Simulation and (b) *Audio Amplitude* Experiment on the Phyphox application

The experiment began by accessing the “Sound” simulation on the PhET website, which is designed to test various factors influencing the characteristics of sound waves. In this experiment, the Phyphox application was used to assist in measuring the amplitude of the produced sound. The use of the Phyphox app in the sound wave experiment aimed to measure audio amplitude. First, an experiment was conducted to analyze the effect of amplitude and frequency on sound wave intensity, using three frequency levels: 600 Hz, 500 Hz, and 400 Hz. Each frequency was tested with three amplitude categories—maximum, medium, and minimum—to observe the changes in waveforms and sound intensity produced. Next, the experiment continued by observing the effects of sound waves generated by two nearby sound sources, taking into account the listener's position: left, right, and center. Three frequency variations—1000 Hz, 500 Hz, and 250 Hz—were tested with three amplitude categories (maximum, medium, and minimum) to observe changes in the characteristics of the sound wave at various positions, as shown in Figure 2.

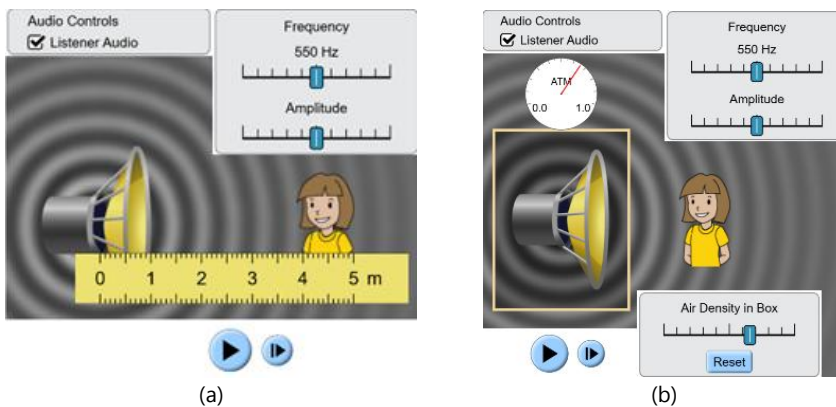


Figure 2. PhET Simulation Experiment Display. (a) Measure single sound, and (b) Measure double sound

Sound measurements were carried out using the Phyphox application by utilizing the *Audio Amplitude Experiment*. In this application, sound amplitude is displayed in decibels (dB). Measurements were conducted using the microphone sensor on the device, which functions to capture the intensity of the generated sound. Higher decibel values indicate greater sound amplitude, meaning the sound is louder or more powerful. Phyphox also provides real-time visual displays, which facilitate users in observing and analyzing changes in noise levels or sound intensity throughout the experiment. The interface of the *Audio Amplitude Experiment* in the Phyphox application is shown in Figure 3.

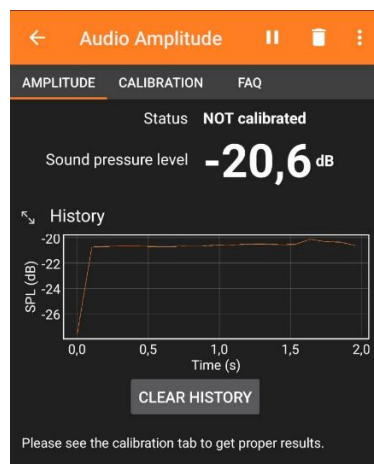


Figure 3. Interface of the Audio Amplitude Experiment in the Phyphox Application

Second, the experiment also analyzed the reflection and interference of sound waves resulting from the spreading angle. Observations were made on the effect of reflected sound waves at three different wall angles—0°, 45°, and 90°—using a frequency of 500 Hz and three amplitude categories: maximum, medium, and minimum. The experimental setup is shown in Figure 4(a). Observations of the maximum and minimum amplitude conditions revealed differences in wave patterns and sound characteristics produced at each of the three angles.

Third, the experiment examined the effect of air pressure on the intensity of sound waves by adjusting the air pressure under different conditions, ranging from 0.0 atm to 1.0 atm, to observe changes in the speed and strength of the resulting sound waves. This experimental setup is presented in Figure 4(b). The results from all experiments provide a deeper understanding of the factors that influence the characteristics of sound waves and their applications in the context of acoustic theory and sound technology.

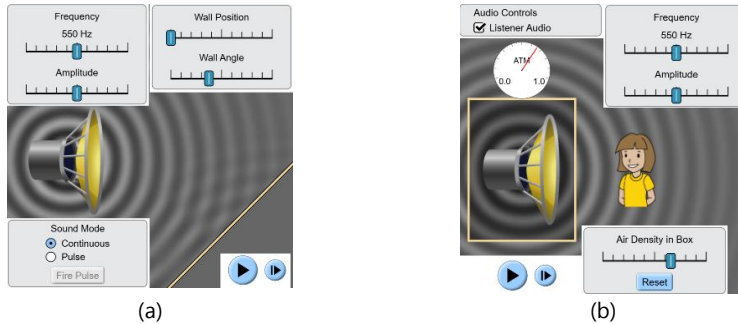


Figure 4. PhET Simulation Experiment Display. (a) Reflection, and (b) Air Pressure

The data obtained from this experiment were analyzed and presented in the form of graphs to facilitate understanding of the changes in sound wave characteristics influenced by variables such as amplitude, frequency, spreading angle, and air pressure. Each graph illustrates the relationship between the tested variables and the observed outcomes, such as the graph showing the relationship between sound intensity and amplitude, and the one between sound intensity and air pressure. The analysis was conducted by observing the upward trends of the graphs and comparing them with existing theories to determine whether the observations aligned with theoretical predictions (Muin, 2023). This approach enables the evaluation of the consistency between experimental data and fundamental physical concepts.

RESULTS AND DISCUSSION

The results of the experiment on the influence of amplitude and frequency on sound intensity at three different measurement distances are plotted in the relationship graphs presented in Figures 4, 5, and 6. Measurements were conducted at frequencies of 400 Hz, 500 Hz, and 600 Hz with amplitude variations ranging from 1 to 10. The study by Pinochet et al. (2021) has empirically demonstrated that the intensity of a sound wave is directly proportional to the square of its amplitude.

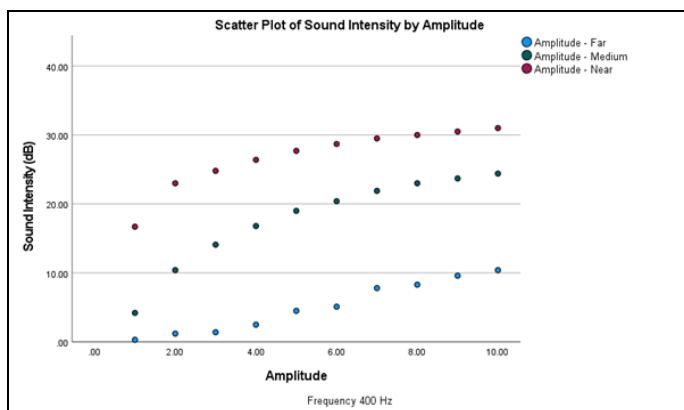


Figure 5. Graph of the Relationship Between Sound Intensity and Amplitude at a Frequency of 400 Hz

Commented [L4]: •Figures 5–7:

- Add error bars to show measurement variability.
- Label axes with units (e.g., "Amplitude (arbitrary units)").
- Theoretical Alignment:**
 - Contrast results with classical models (e.g., Eq. 3 predictions vs. observed intensity-frequency trends).
- Limitations:**
 - Address PhET's idealizations (e.g., perfect reflectors, homogeneous media) and their impact on real-world applicability.
 - Discuss why higher frequencies (600 Hz) showed greater intensity—is this due to simulation artifacts or physics?

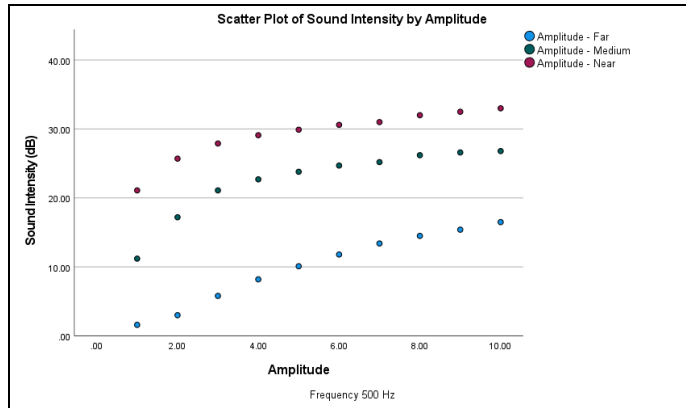


Figure 6. Graph of the Relationship Between Sound Intensity and Amplitude at a Frequency of 500 Hz

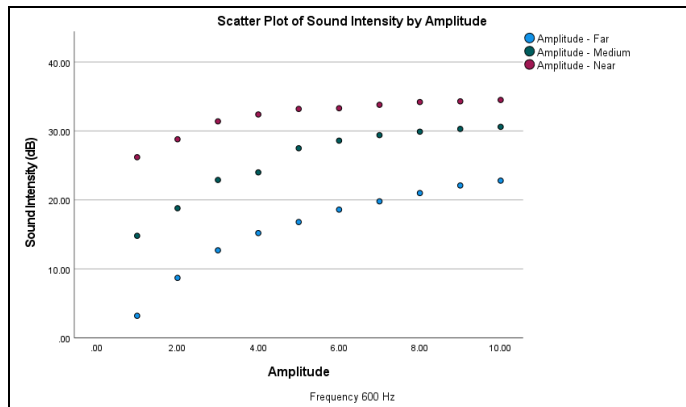


Figure 7. Graph of the Relationship Between Sound Intensity and Amplitude at a Frequency of 600 Hz

Sound intensity (dB) shows a clear positive trend with increasing amplitude for all measurement distances. The rate of dB increase appears steeper at low amplitudes and then slightly levels off at higher amplitudes, especially for the "Near" and "Medium" distances. The "Near" distance consistently exhibits the highest dB values, followed by "Medium," and then "Far," which shows the lowest dB values for each specific amplitude. A similar trend is observed at the frequency of 400 Hz, where sound intensity increases with amplitude for all distances. The absolute dB values at 500 Hz tend to be higher compared to 400 Hz for corresponding amplitudes and distances. The absolute dB values at 600 Hz generally produce higher dB levels than those at 400 Hz and 500 Hz for the same amplitude and distance. The leveling-off effect at high amplitudes is also evident. Overall, it is observed that increasing frequency consistently results in higher sound intensity (dB) at all amplitude levels and distances (Pinochet et al., 2021). Furthermore, attenuation of sound intensity due to distance is clearly seen, with stratification of intensity levels based on distance across all tests.

The results of the experiment on the effect of spreading angle on the reflection angle of sound waves are shown in Figure 8. Measurements were conducted at a frequency of 550 Hz with amplitude variations of 1, 5, and 10, and incidence angles of 90°, 45°, and 18°.

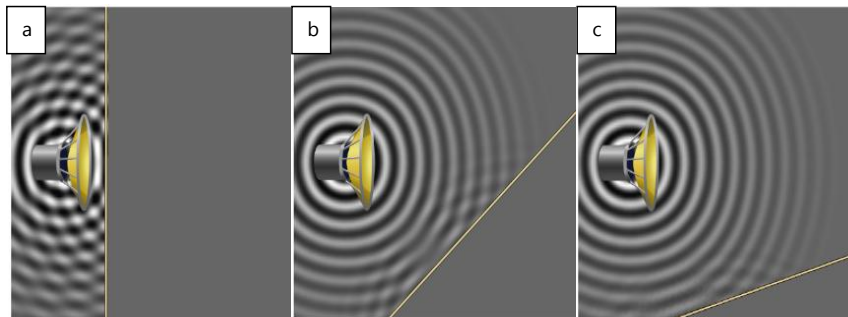


Figure 8. Reflection and Interference of Sound Waves Relative to Spreading Angle. (a) 90° Angle, (b) 45° Angle, (c) 18° Angle

Figure 8a shows waves appearing to radiate from the sound source and reflecting back from a vertical wall. The incident and reflected wavefronts are largely parallel, resulting in a clear superposition. Regions of constructive and destructive interference form a pattern resembling standing waves near the wall. When the wall is tilted, the incident waves strike the wall and reflect at an angle. The reflected waves interact clearly with the subsequent incident waves. The interference pattern is more complex compared to Figure 8b, with different regions of constructive and destructive interference forming an oblique pattern. A wall at a steeper angle produces distinct reflections and interference patterns. The areas of constructive and destructive interference differ from those in Figure 8c, illustrating how the angle of the reflecting surface determines the spatial distribution of the interference field (Zagubień & Wolniewicz, 2024).

The results of the experiment on the effect of air pressure on sound intensity are plotted in the graph presented in Figure 9. Measurements were conducted at a frequency of 550 Hz with amplitude variations of 1, 5, and 10, and air pressure ranging from 0.0 atm to 1.0 atm.

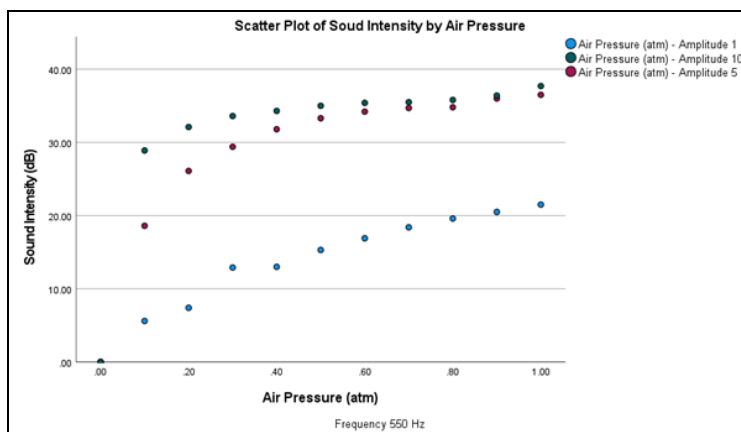


Figure 9. Graph of the Relationship Between Sound Intensity and Air Pressure

Figure 9 shows that for all three amplitude levels, the sound intensity is 0.0 dB at an air pressure of 0.0 atm. As air pressure increases, the sound intensity (dB) rises significantly (Pinochet et al., 2021). The most rapid increase occurs at low pressure levels, after which the rate of increase in dB becomes less steep, although the intensity continues to rise. Higher amplitudes consistently produce higher dB values at every air pressure above zero. This confirms that a medium is necessary for the propagation of sound waves, and the relationship between air pressure and sound intensity (dB) is nonlinear (Costa et al., 2023).

Analysis of the Influence of Amplitude and Frequency on Sound Wave Intensity

The research results show that the sound intensity increases along with the increase in amplitude. This finding aligns with the basic principle that the intensity (I) of a wave is proportional to the square of its amplitude (A). This means that doubling the amplitude results in an increase in intensity (power per unit area) by a factor of four. The decibel (dB) scale is logarithmic and is used to express the ratio between a certain amplitude value and a reference value. The general formula for calculating decibels is:

$$dB = 10 \log_{10} \frac{P}{P_0} \quad (1)$$

Where P is the power or sound intensity being measured, and P_0 is the reference power or intensity, which is usually the human hearing threshold of 10^{-12} watts per square meter (watt/m^2). Sound intensity measurements using the Phyphox application can show both positive and negative values. Positive values ($dB > 0$) indicate that the sound amplitude is greater than the reference value, meaning the sound is loud or strong, such as a car horn reaching around 100 dB. A zero value ($dB = 0$) means the sound amplitude is equal to the reference value. This does not mean there is no sound, but rather a very faint sound exactly at the threshold of human hearing. Negative values ($dB < 0$) indicate that the sound amplitude is less than the reference value, meaning the sound is very weak or almost inaudible, like a soft whisper in a very quiet room.

Consequently, although the actual sound energy increases significantly with amplitude, the perceived loudness (related to dB) increases more slowly (Zagubieć & Wolniewicz, 2024). The "flattening" phenomenon observed in the dB versus Amplitude graphs (Figures 4, 5, 6) at higher amplitudes is a manifestation of logarithmic scaling (Fajarwati et al., 2023). For example, an increase in intensity from $10^{-6} \text{ W}/\text{m}^2$ to $10^{-5} \text{ W}/\text{m}^2$ (a tenfold increase) corresponds to a 10 dB. However, an increase from $10^{-3} \text{ W}/\text{m}^2$ to $2 \times 10^{-3} \text{ W}/\text{m}^2$ (a twofold increase) only corresponds to an increase of about 3 dB. This explains why large changes in amplitude at high intensity levels result in smaller dB increases compared to similar proportional changes at low intensity levels (Fajarwati et al., 2023). For instance, if the amplitude is doubled, the intensity increases fourfold, and the change in dB would be:

$$10 \log(4I_1/I_0) - 10 \log(I_1/I_0) = 10 \log(4) \approx 6 \text{ dB} \quad (2)$$

The experimental data also show that for a constant amplitude, higher frequencies generally produce higher sound intensities. This is consistent with the theoretical relationship:

$$I = \frac{1}{2} \rho v (\omega s_{\max})^2 \quad (3)$$

where $\omega = 2\pi f$ is the angular frequency and s_{max} is the maximum displacement amplitude.

For a constant amplitude, the intensity is proportional to the square of the frequency. A higher frequency means more wave cycles pass a point per unit time. If the displacement per cycle (amplitude) is the same, then more cycles imply more energy delivered per unit time, resulting in higher power and intensity (Costa et al., 2023).

Analysis of Reflection and Interference of Waves Due to Angle of Propagation

Experimental data consistently show that the angle of incidence equals the angle of reflection for various amplitudes and angles of incidence. Figure 8 clearly illustrates the phenomenon of wave interference resulting from the superposition of incident and reflected sound waves. The incident sound waves travel from the left or right direction, while the reflected waves, originating from the reflection surface, travel from the opposite direction. When these two waves meet and interact, superposition occurs—this is the combination of two waves producing a new wave pattern called a standing wave. In a standing wave, two important types of points are formed: nodes and antinodes. Nodes (●) are points along the wave where the amplitude is always zero. This happens because the incident and reflected waves meet out of phase (phase difference of 180°), canceling each other out (minimum amplitude), a condition known as destructive interference. Destructive interference occurs when $\Delta s = (n + 1/2)\lambda$ where Δs is the path difference between the two waves, λ is the wavelength of the sound, and n is an integer ($n = 1, 2, 3, \dots$). Conversely, antinodes are points where the wave amplitude reaches its maximum. These points form when the two waves meet in phase, reinforcing each other's amplitude, resulting in constructive interference. Constructive interference occurs when $\Delta s = n\lambda$. The resulting standing wave pattern shows that the distance between two consecutive nodes or two consecutive antinodes is half a wavelength ($\lambda/2$).

Figure 8a shows clear constructive and destructive interference, forming a pattern resembling standing waves. This occurs because the incident and reflected waves move directly in opposite directions, creating fixed points with maximum and minimum displacements (Mahardhika & Darsono, 2024). Figures 8b and 8c demonstrate how changes in the angle of the reflecting surface alter the geometry of the interference pattern. The regions of constructive and destructive interference are spatially redistributed according to the reflection angle, creating more complex, tilted fringe patterns. This happens because the path difference between the incident and reflected waves arriving at a given point changes as the reflection angle varies.

Analysis of the Effect of Air Pressure on Sound Wave Intensity

Experimental results show that the sound intensity is zero at zero air pressure, regardless of the source amplitude. This confirms that sound, as a mechanical wave, requires a medium for propagation. Without air particles to oscillate and transfer energy, sound cannot propagate (Vishnu et al., 2023).

The sound intensity (I) is related to the pressure amplitude of the sound wave (Δp_{sound}), the density of the medium (ρ), and the speed of sound in the medium (v) through the equation:

$$I = \frac{(\Delta p_{sound})^2}{2\rho v} \quad (4)$$

The term ρv is the characteristic acoustic impedance (Z) of the medium. Air pressure is directly related to air density (ρ) assuming constant temperature, through the ideal gas law. As air pressure increases, density increases, resulting in higher acoustic impedance.

The graph in Figure 9 shows that as air pressure increases from zero, sound intensity also rises significantly. This indicates a more efficient energy transfer from the sound source to the medium and through the medium. At very low pressure, the medium is sparse, leading to poor energy transfer. As pressure increases, the medium becomes denser, allowing for better coupling and more effective propagation of sound energy. Sound is a vibration of particles; more particles mean the transfer of vibrational energy is more efficient (Costa et al., 2023). Acoustic impedance represents the medium's resistance to acoustic flow. The data shows intensity increases with pressure, indicating the medium's improved capacity to carry sound energy. A study by Vishnu et al. (2023) on underwater noise emissions, although in a different medium, underscores the importance of the medium's properties in sound generation and propagation.

The observed non-linear increase in dB with rising air pressure (Figure 9) can be attributed to fundamental physics and the logarithmic nature of the dB scale. Even the presence of a small amount of medium initially allows sound propagation, leading to a large relative increase from zero intensity. As pressure (and density) continues to increase, the absolute intensity keeps rising, but the dB increment becomes smaller for equivalent linear changes in pressure, especially if the relationship between pressure and actual intensity itself is non-linear (Pinochet et al., 2021). Research on sound propagation under various atmospheric conditions often considers the effects of pressure, temperature, and humidity on absorption and speed, which in turn influence intensity over distance.

Implications of Research Based on PhET Simulations

Simulation using PhET allows controlled manipulation of variables and visualization of concepts that are difficult to observe directly in traditional laboratories. The effectiveness of PhET in enhancing conceptual understanding has been documented in various studies (Nuryantini et al., 2021). However, PhET simulations are idealizations of real-world conditions. The simulations may not account for all factors affecting sound propagation, such as air turbulence, complex reflections from uneven surfaces, or the full spectrum of atmospheric absorption effects. The representation of wave interactions and medium properties may be simplified. For example, the exact algorithm by which the "amplitude" setting in PhET translates to physical displacement or pressure amplitude, and how "air pressure" affects density and sound speed, might involve underlying assumptions not fully transparent to users. Additionally, the simulation may not include all relevant variables that can influence sound characteristics in real-world scenarios, such as humidity and temperature gradients (Nuryantini et al., 2021).

Advantages of the simulation include its ability to isolate variables and demonstrate core principles. However, this control comes at the cost of potentially oversimplifying the rich acoustic complexities of the real world. PhET aims to effectively teach fundamental concepts by simplifying reality and removing distracting variables (Mahardhika & Darsono, 2024). For example, in reflection simulations, the walls are likely perfect reflectors, and the medium is perfectly homogeneous. In reality, surfaces absorb and scatter sound, and the air exhibits micro variations. This means that although the simulation accurately demonstrates the principles of reflection and interference, precise quantitative results may differ from physical experiments due to real-world imperfections. Findings from the simulation should be

understood as illustrations of fundamental concepts, and caution is necessary when directly extrapolating quantitative results to specific and complex real-world applications without further validation (Nuryantini et al., 2021). This research could be expanded by comparing simulation results with physical experiments or more advanced computational acoustic models to assess the degree of idealization within PhET.

CONCLUSION

The results show that sound intensity increases non-linearly on the decibel scale as amplitude and frequency increase. Larger amplitudes produce higher wave energy, while higher frequencies accelerate the rate of energy transfer. The reflection angle equals the angle of incidence, in accordance with the law of reflection, and the scattering angle influences the complex interference patterns caused by the superposition of incident and reflected waves. Increasing air pressure leads to a non-linear increase in sound intensity. The PhET simulation is effective in visualizing fundamental acoustic principles, although it has limitations due to the idealization of conditions. Therefore, further research combining simulations, physical experiments, and advanced computational modeling is recommended to gain a more comprehensive understanding of acoustic phenomena in the real world.

REFERENCES


- Amelia, N., Kusumaningtyas, N. C., HF, A. R., Sulistiyowati, A., & Mufida, J. (2023). Rancang Bangun Alat Praktikum Resonansi Bunyi Dengan Menentukan Cepat Rambat Bunyi Di Udara Pada Pipa Kecil dan Pipa Besar. *Jurnal Ilmiah Wahana Pendidikan*, 9(14), 546-552.
- Bosia, F., Dal Poggetto, V. F., Gliozzi, A. S., Greco, G., Lott, M., Miniaci, M., Ongaro, F., Onorato, M., Seyyedizadeh, S.F., Tortello, M. & Pugno, N. M. (2022). Optimized structures for vibration attenuation and sound control in nature: A review. *Matter*, 5(10), 3311-3340.
- Costa, J. P., Baptista, M., Conceição, T., & Maurício, P. (2023). Construct map development for the propagation of sound in the air. *EURASIA Journal of Mathematics, Science and Technology Education*, 19(9), em2327.
- Eka, O. (2023). *Pengembangan e-modul fisika pada materi gelombang berbasis mitigasi kebencanaan di SMA/MA kelas XI*. (Doctoral dissertation, UIN Raden Intan Lampung).
- Fajarwati, L., Feriadi, Y., & Widjiati, E. (2023). Underwater Acoustic Intensity Analysis using Noise Assisted-MEMD with Varying Distances. *Jurnal Teknik Elektro*, 15(1), 24-29.
- Fitri, N. A., Sa'adah, N., Fikriya, S., Suryandari, K. C., & Fatimah, S. (2023). Analisis Gelombang Bunyi Melalui Alat Peraga Sederhana dan Relevansinya dalam Pembelajaran di SD. In *Social, Humanities, and Educational Studies (SHES): Conference Series* (Vol. 6, No. 1, pp. 617-624).
- Kho, W. K. (2014). Studi material bangunan yang berpengaruh pada akustik interior. *Dimensi Interior*, 12(2), 57-64.
- Kurniawan, A., Herlinawati, H., & Marasabessy, R. (2024). Pemanfaatan PhET colorado untuk meningkatkan hasil belajar siswa pada materi rangkaian listrik. *Asian Journal Collaboration of Social Environmental and Education*, 1(2).
- Ledjab, F. A. W., Koli, K., Tahu, M. V. F., & Dewa, E. (2024). Inovasi Pembelajaran Fisika: Integrasi Problem Based Learning dan Simulasi PhET pada Materi Gelombang Bunyi. *MAGNETON: Jurnal Inovasi Pembelajaran Fisika*, 2(2), 112-119.
- Li, M., Wang, M., Ding, R., Deng, T., Fang, S., Lai, F., & Luo, R. (2021). Study of acoustic emission propagation characteristics and energy attenuation of surface transverse

Commented [L5]: •Recommend physical experiments to validate simulations (e.g., using pressure chambers).
•Propose investigating temperature/humidity effects, which PhET omitted.

Commented [L6]: •Ensure all citations (e.g., Zagubień & Wolniewicz, 2024) are listed.
•Replace "et al." with full author lists for sources with ≤5 authors.

- wave and internal longitudinal wave of wood. *Wood Science and Technology*, 55, 1619-1637.
- Machado, M. R., & Dos Santos, J. M. C. (2021). Effect and identification of parametric distributed uncertainties in longitudinal wave propagation. *Applied Mathematical Modelling*, 98, 498-517.
- Mahardhika, S. R., & Darsono, T. (2024). Pengembangan Modul Praktikum Interferensi Gelombang Bunyi Berbantuan Visual Analyser. *Unnes Physics Education Journal*, 13(1), 9-14.
- Maulana, S. (2020). Pengaruh Perubahan Temperatur terhadap Respon Amplitudo dengan Menggunakan Gelombang Ultrasonik pada Pola Aliran Slug Pipa Horizontal. *Jurnal Inovasi Mesin*, 2(2), 43-50.
- Muhtar, E. (2022). Pengaruh Pendekatan Ketrampilan Proses Dalam Meningkatkan Hasil Belajar Fisika Pada Konsep Getaran Dan Gelombang Pada Peserta Didik Kelas VIII SMP Negeri 17 Halmahera Selatan. *KUANTUM: Jurnal Pembelajaran Dan Sains Fisika*, 3(1), 38-62.
- Muin, M. P. (2023). *Metode penelitian kuantitatif*. CV Literasi Nusantara Abadi.
- Mulyaningsih, R. S. (2024). Effect of amplitude and frequency on the speed of sound waves in air and water using PHET simulation. *Jurnal Pendidikan dan Ilmu Fisika*, 4(1), 40.
- Nuryantini, A. Y., Zakwandi, R., & Ariyuda, M. A. (2021). Home-made simple experiment to measure sound intensity using smartphones. *Jurnal Ilmiah Pendidikan Fisika Al-Biruni*, 10(1), 159-166.
- Pinochet, J., Cortada, W. B., & Peña, M. S. (2021). Graphic relation between amplitude and sound intensity level. *The Physics Teacher*, 59(6), 467-469.
- Qowiyyah, S. N. (2022). Kemakbulan Doa dalam Perspektif Al-Qur'an dan Fisika Gelombang. *Qaf: Jurnal Ilmu Al-Qur'an dan Tafsir*, 4(1), 45-67.
- Rijal, M. (2024). *Pengembangan Buku Saku Elektronik Berbasis Google Sites pada Materi Gelombang Bunyi dan Cahaya Tingkat SMA/MA* (Doctoral dissertation, UIN Ar-Raniry Banda Aceh).
- Rismawan, H., & Aisiyah, M. C. (2023). Menentukan Nilai Periode, Amplitudo, Frekuensi Dan Memvisualisasi Getaran Harmonik Pada Pegas Dalam Bentuk Gelombang. *Jurnal Fisika: Fisika Sains Dan Aplikasinya*, 8(1), 25-29.
- Siregar, D. A. (2022). Pengaruh penggunaan metode demonstrasi terhadap hasil belajar fisika siswa pada materi pokok gelombang bunyi kelas XII di SMA Negeri Batang Onang. *Jurnal Physics Education (PhysEdu)*, 4(3), 11.
- Vishnu, H., Deane, G. B., Glowacki, O., Chitre, M., Johnson, H., Moskalik, M., & Stokes, D. (2023). Depth-dependence of the underwater noise emission from melting glacier ice. *JASA Express Letters*, 3(2).
- Widiansyah, M. G. (2021). Tutorial Praktikum Resonansi Gelombang Bunyi Menggunakan Teknologi Augmented Reality Dan Metode Fuzzy Mamdani. *Universitas Komputer Indonesia*.
- Zagubień, A., & Wolniewicz, K. (2024). Measurements and Analysis of Sound Reflections from Selected Building Façades. *Applied Sciences*, 14(24), 11627.

PERBAIKAN

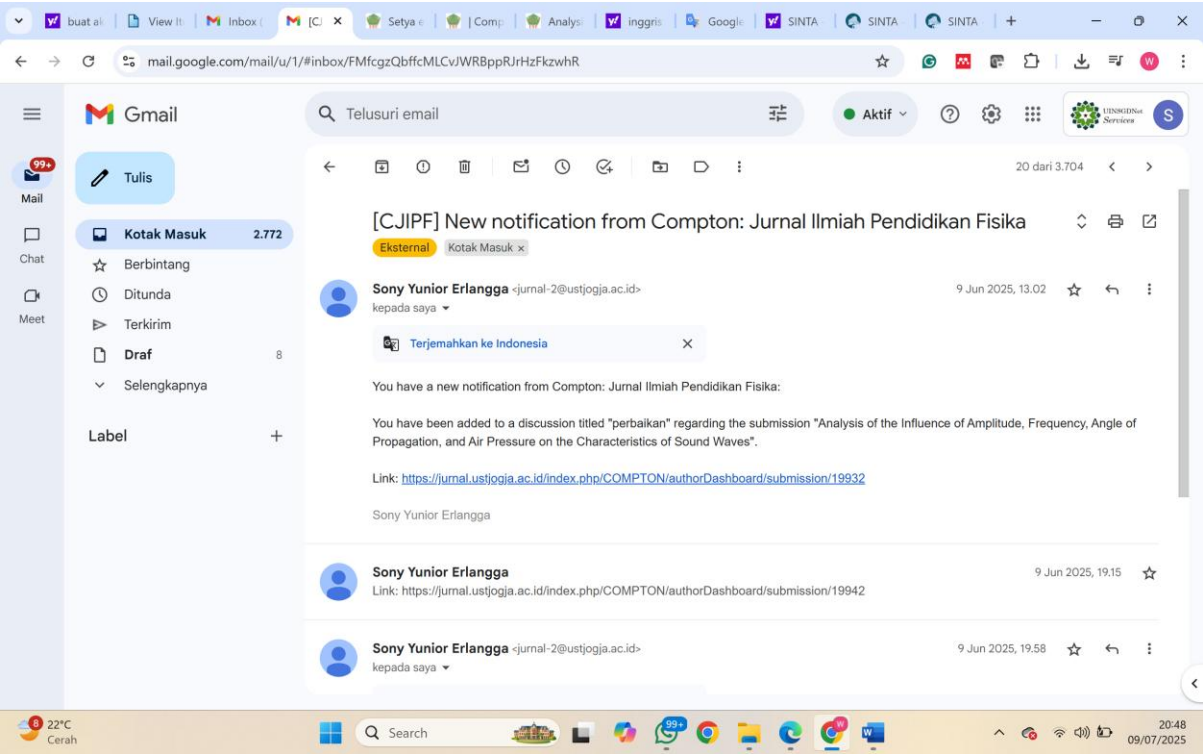

perbaikan ✕

Participants

Sony Yuniar Erlangga (sony_erlangga)
winda setya (windasety4)

Messages	
Note	From
perbaiki sesuai saran  Revisi 19942.doc	sony_erlangga 2025-06-09 07:15 PM
▶ ini hasil perbaikannya pa  DRAFT REVISI ARTIKEL GELOMBANG BUNYI.doc	windasety4 2025-06-16 05:03 PM
Add Message	

Analysis of the Influence of Amplitude, Frequency, Angle of Propagation, and Air Pressure on the Characteristics of Sound Waves

Winda Setya*, Ilman Azmi, Ikmal Konit Istiqomah, Dinaldhi Muhammad Aditya, Muhammad Minan Chusni, Ea Cahya Septia Mahen, Pina Pitriana, Ade Yeti Nuryantini, Seni Susanti

Program Studi Pendidikan Fisika, UIN Sunan Gunung Djati, Bandung, Indonesia

*Corresponding Author. E-mail:

Abstract: This study offers a comprehensive approach that has not been widely explored, integrating PhET interactive simulations and the Phyphox sensor application to analyze the simultaneous influence of four physical parameters amplitude, frequency, dispersion angle, and pressure on the characteristics of sound waves. The integration of PhET interactive simulations and the Phyphox application enables real-time visualization and experimental data measurement through smartphone sensors. Furthermore, this research contributes new insights by exploring the dispersion angle in the context of wave direction and intensity, a topic rarely discussed in digital media-based acoustic studies. The method used is a quantitative experiment with amplitude variations from 1 to 10 and frequencies of 400 Hz, 500 Hz, and 600 Hz, measured at distances of 1 cm, 3.25 cm, and 5.5 cm. The study also includes observations of reflection and interference patterns of waves at propagation angles of 18°, 45°, and 90°, as well as an analysis of the effect of air pressure on sound intensity, with pressure varied from 0.0 atm to 1.0 atm. The results show that sound wave intensity increases with higher amplitude and frequency, in accordance with the theory that intensity is proportional to the square of the amplitude. The propagation angle influences the reflection and interference patterns, resulting in varied energy distribution. Additionally, air pressure significantly affects sound intensity, emphasizing the crucial role of the medium in sound wave propagation.

Keywords: Sound Waves, Amplitude, Frequency, Air Pressure, Interference Patterns

INTRODUCTION

A wave is a propagating vibration. Waves occur due to the presence of a vibration source and can carry energy as they propagate. Waves can be classified based on the direction of propagation and the medium through which they travel. Sound waves are waves that propagate in a longitudinal direction, consisting only of compressions and rarefactions, and require a mechanical medium to travel (Muhtar, 2022). Sound is a longitudinal wave formed within a medium, whether the medium is solid, liquid, or gas (Mulyaningsih, 2024).



Although longitudinal mechanical waves have a wide frequency range, only certain frequencies can be detected by the human auditory system—those capable of producing the sensation of sound in the ears and brain. Sound can be heard due to the vibration of an object that acts as the sound source. These vibrations cause the surrounding air to vibrate, and the disturbance then propagates through the air medium until it reaches the eardrum. Sound waves are essentially periodic variations in air pressure along their path of propagation (Putri et al., 2024).

Sound waves occur when an object vibrates and the resulting vibrations affect the surrounding medium, creating regions of compression and rarefaction within the medium (Bosia et al., 2022). In this process, energy can transfer from one place to another or from one object to another, enabling longitudinal waves to travel through a medium (Machado, 2021). The displacement of molecules from their equilibrium position results in compressions and rarefactions. The maximum displacement or the greatest distance from the equilibrium point is referred to as the amplitude (Rismawan et al., 2023). In terms of molecular displacement, sound waves occur along a horizontal axis and take the form of compressions or rarefactions, which can be observed through pressure variations (Qowiyyah, 2022). The pressure of the medium increases during compressions, while it decreases during rarefactions (Li et al., 2021).

Sound waves possess fundamental properties common to all types of waves, such as interference, diffraction, refraction, and resonance (Rijal, 2024). Interference is a key wave characteristic that occurs when two or more sound waves meet and overlap in the same region, resulting in a new wave pattern (Siregar, 2022). Diffraction occurs when the direction of sound wave propagation changes as it passes around the edge or through an opening of a barrier, allowing it to spread into shadowed regions. The extent of diffraction largely depends on the relationship between the wavelength of the sound and the size of the obstacle. If the wavelength is larger than the obstacle, the diffraction effect becomes more pronounced (Kho, 2024). Resonance occurs when two objects share the same frequency. Additionally, when two waves with maximum amplitude meet and reinforce each other, they produce a loud humming sound (Widiansyah, 2021). The speed of sound wave propagation is influenced by its amplitude and frequency. However, since the speed of sound cannot be observed with the naked eye, simulations are needed to visualize it (Amelia et al., 2023). Sound can also be reflected, following the law of reflection, which states that the angle of incidence is equal to the angle of reflection. When sound is reflected, the following conditions apply: (1) the angle of incidence, the angle of reflection, and the normal line lie in the same plane; (2) the angle of incidence equals the angle of reflection (Afifah et al., 2025).

The study conducted by Rejeki (2024) examined the influence of amplitude and frequency on the speed of sound waves in air and water mediums using PhET simulations. The results showed that amplitude and frequency are directly proportional to the speed of sound wave propagation, and due to the higher particle density in water, sound waves travel faster in water compared to air. Amplitude determines the loudness of the sound; the greater the amplitude, the louder the sound and the higher the energy, since energy is proportional to the square of the amplitude. Meanwhile, frequency affects the pitch; a high frequency produces a sharp sound, while a low frequency produces a deep sound. In some cases, high frequencies also carry greater energy. Thus, amplitude and frequency play important roles in determining the characteristics and energy of sound waves.

The study conducted by Maulana (2020) found that changes in temperature and pressure affect the amplitude of ultrasonic waves in a liquid medium, which is directly related to the

amount of acoustic energy transmitted (Maulana, 2020). Additionally, frequency is known to influence the perception of pitch and is closely related to the vibration pattern of the sound source. Frequency is one of the main physical parameters affecting human perception of pitch. This frequency is closely associated with the periodic vibration pattern produced by the sound source, where the higher the vibration frequency, the higher the pitch perceived by the human auditory system.

Finally, the study conducted by Fitri (2023) demonstrated that air pressure is closely related to the speed of sound propagation, as pressure affects the particle density within the air medium, thereby influencing how longitudinal waves travel (Fitri, 2023). On the other hand, the wave spreading angle can also alter the direction and intensity of sound wave energy received at different spatial points, although this aspect has not been extensively explored experimentally. Based on theoretical understanding and supported by these findings, an initial hypothesis was formulated that amplitude, frequency, spreading angle, and air pressure simultaneously influence the characteristics of sound waves, including their intensity, propagation speed, and direction of spreading. A review of several other articles suggests that amplitude is believed to play a role in determining the magnitude of sound intensity perceived by the listener.

This study utilized the PhET Simulation platform developed by the University of Colorado to conduct experiments. This simulation media comprises educational materials in physics, chemistry, and biology, and is designed interactively to enable users to learn virtually (Kurniawan et al., 2023). The simulation supports the learning of physics concepts through detailed and interactive visualizations (Ledjab et al., 2024). Besides PhET, another platform that can be employed in this research is Phyphox. Phyphox is an application developed by RWTH Aachen University that allows users to conduct physics experiments using built-in smartphone sensors, such as microphones, accelerometers, magnetometers, gyroscopes, and light sensors (Imtinan & Kuswanto, 2023).

This study aims to examine the simultaneous influence of four physical parameters (amplitude, frequency, dispersion angle, and air pressure) on the characteristics of sound waves, which has not been comprehensively addressed in previous research. It also integrates two digital platforms PhET interactive simulations and the Phyphox application which enable real-time visualization of wave patterns and experimental data measurement using smartphone sensors. Moreover, the dispersion angle, which has rarely been explored, is analyzed in the context of wave propagation direction and intensity, thereby providing a new contribution to digital media-based acoustic studies.

METHOD

This study employs a quantitative approach with an experimental design to analyze the effects of amplitude, frequency, dispersion angle, and air pressure on the characteristics of sound waves using PhET simulations (Eka, 2023). The quantitative approach in this research refers to the use of numerical data generated from experiments to measure, analyze, and test the relationships among variables involved in the physical phenomenon of sound waves (Widyastuti et al., 2024). Through this approach, the study aims to produce data that can be statistically analyzed to identify patterns or trends that may exist in changes to sound wave characteristics. PhET simulations were chosen for their ability to provide a clear visual representation of the interactions between these physical factors, allowing researchers to directly manipulate variables and observe the outcomes in a controlled and interactive

environment. This approach offers an opportunity to explore complex acoustic phenomena, measure the mathematical relationships among these variables, and obtain data that can be used to deepen understanding of the behavior of sound waves under various physical conditions.

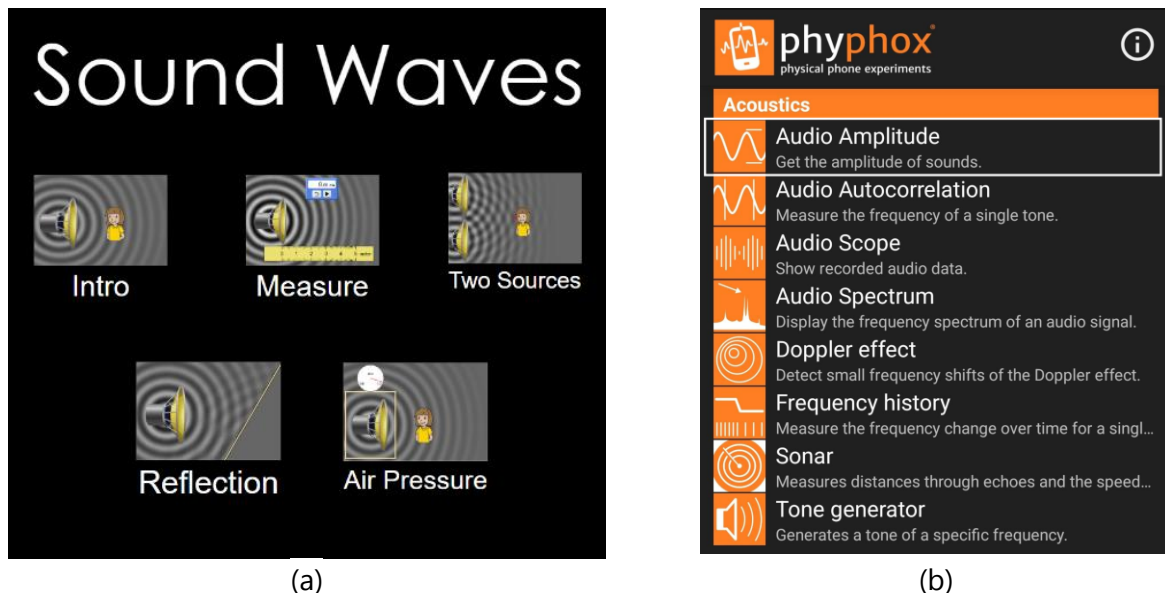


Figure 1. Application Interface. (a) *Sound Wave* experiment on PhET Simulation and (b) *Audio Amplitude Experiment* on the Phyphox application

The experiment begins by opening the "Sound" simulation on the PhET website, which is designed to test various factors that affect the characteristics of sound waves. In this experiment, the Phyphox application is used to help measure the amplitude of the produced sound. The use of Phyphox in the sound wave experiment aims to measure audio amplitude. The PhET simulation is run on a Lenovo Yoga Slim 7i Carbon 13ITL5 laptop, and Phyphox is operated on a Samsung S23 Ultra mobile phone.

In the Sound simulation on PhET Interactive Simulations, the amplitude setting refers to the displacement amplitude of particles in the medium, which is visualized through the vibration of particles around their equilibrium position; the greater the amplitude, the greater the particle displacement. Although it does not directly represent pressure amplitude, this particle displacement is closely related to pressure variations in longitudinal waves, so an increase in displacement amplitude also reflects an increase in pressure amplitude.

First, the experiment analyzes the effect of amplitude and frequency on the intensity of sound waves, conducted at three frequency levels: 600 Hz, 500 Hz, and 400 Hz. The selection of these frequencies is based on the range commonly found in various acoustic phenomena in the surrounding environment, particularly in the context of sound waves used by many organisms for communication and navigation. These frequencies are low enough to allow the waves to travel moderate to long distances without significant absorption, yet remain within a range that is easy to measure and analyze in the simulation. Each frequency is tested with three amplitude categories maximum (1000), medium (550), and minimum (100) to observe changes in the shape and intensity of the resulting sound waves.

Next, the experiment continues by observing the effect of sound waves produced by two adjacent sound sources, focusing on the listener's position relative to the left speaker at

distances of 1 cm, center at 3.25 cm, and right at 5.5 cm. Three frequency variations 1000 Hz, 500 Hz, and 250 Hz are tested with three amplitude categories (maximum, medium, and minimum) to observe changes in the characteristics of sound waves at different positions, as illustrated in Figure 2.

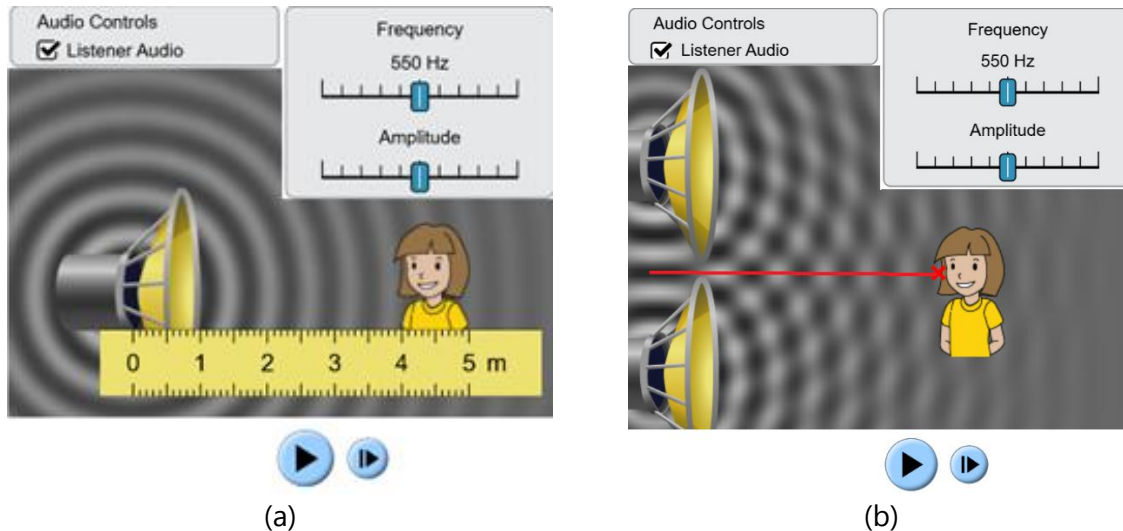


Figure 2. PhET Simulation Experiment Display. (a) Measure single sound, and (b) Measure double sound

Sound measurements were conducted using the Phyphox application through the Audio Amplitude Experiment feature. In this application, sound amplitude is displayed in decibels (dB). The measurements were taken using the microphone sensor, which functions to capture the intensity of the produced sound. Higher decibel values indicate greater sound amplitude, meaning the sound is stronger or louder. Phyphox also provides a real-time visual display, making it easier for users to observe and analyze changes in noise levels or sound intensity during the experiment. The interface of the Audio Amplitude Experiment in Phyphox is shown in Figure 3.

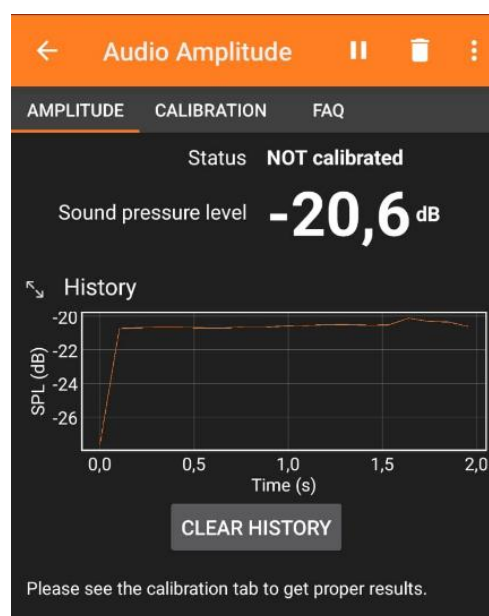


Figure 3. Interface of the Audio Amplitude Experiment in the Phyphox Application

Second, the experiment also analyzes the reflection and interference of sound waves caused by the dispersion angle. Observations were made on the effects of sound waves reflected at three different wall angles: 0° , 45° , and 90° , using a frequency of 500 Hz and three amplitude categories: maximum, medium, and minimum. The experimental setup is shown in Figure 4(a). The observations for maximum and minimum amplitude revealed differences in the patterns and characteristics of the sound waves produced at each of the three angles.

Third, the experiment analyzes the effect of air pressure on the intensity of sound waves by adjusting air pressure under different conditions, ranging from 0.0 atm to 1.0 atm, to observe changes in the speed and strength of the resulting sound waves. The pressure range from 0 to 1 atmosphere is used to demonstrate that the propagation of sound waves requires a medium. A pressure of 1 atm represents normal atmospheric conditions at the Earth's surface, which is ecologically relevant. In contrast, a pressure of 0 atm represents a vacuum in which sound cannot propagate although such conditions do not occur naturally on Earth, they are pedagogically important for understanding the fundamental concept of sound wave propagation. The experimental setup is shown in Figure 4(b). The results of all these experiments provide a deeper understanding of the factors that influence the characteristics of sound waves and their applications in the context of sound theory and technology.

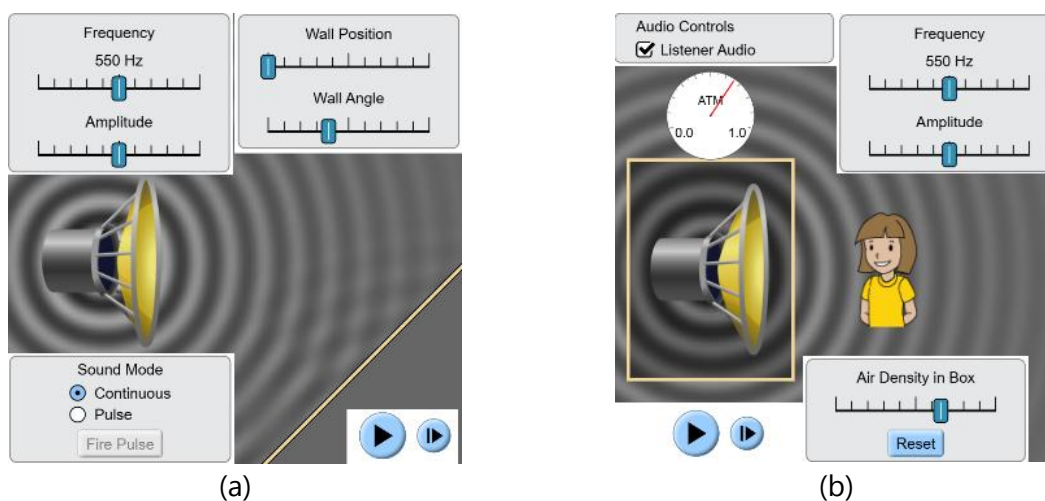


Figure 4. PhET Simulation Experiment Display. (a) Reflection, and (b) Air Pressure

The data obtained from this experiment were analyzed and presented in the form of graphs to facilitate understanding of the changes in sound wave characteristics influenced by variables such as amplitude, frequency, dispersion angle, and air pressure. Each graph illustrates the relationship between the tested variable and the observation results, such as the graph of sound intensity versus amplitude and the graph of sound intensity versus air pressure. The analysis was conducted by observing the trend of the graph's increase and comparing it with existing theories to determine whether the observations align with theoretical predictions (Muin, 2023). This approach makes it possible to evaluate the consistency between the experimental data and the fundamental principles of physics.

RESULTS AND DISCUSSION

The results of the experiment on the influence of amplitude and frequency on sound intensity at three different measurement distances are plotted in the relationship graphs presented in Figures 4, 5, and 6. Measurements were conducted at frequencies of 400 Hz, 500 Hz, and 600 Hz with amplitude variations ranging from 0.01 m to 0.10 m. The study by Pinochet et al. (2021) has empirically demonstrated that the intensity of a sound wave is directly proportional to the square of its amplitude.

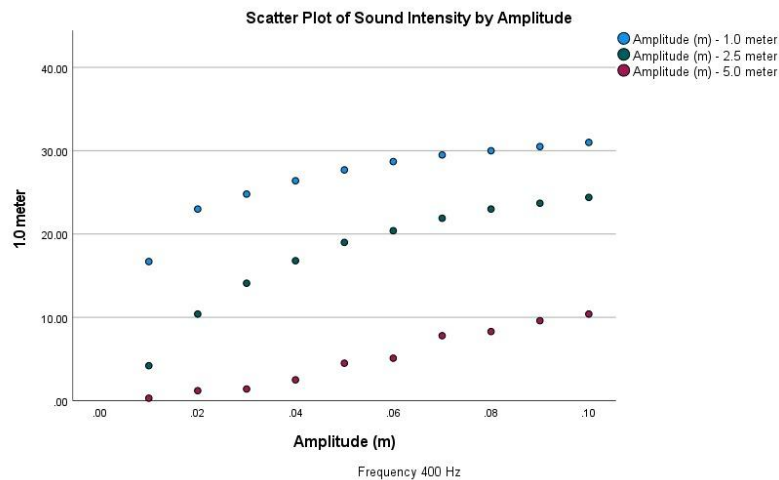


Figure 5. Graph of the Relationship Between Sound Intensity and Amplitude at a Frequency of 400 Hz

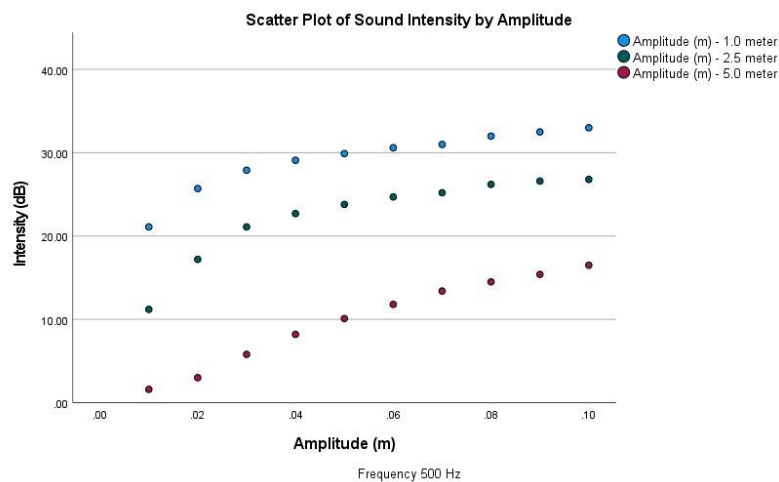


Figure 6. Graph of the Relationship Between Sound Intensity and Amplitude at a Frequency of 500 Hz

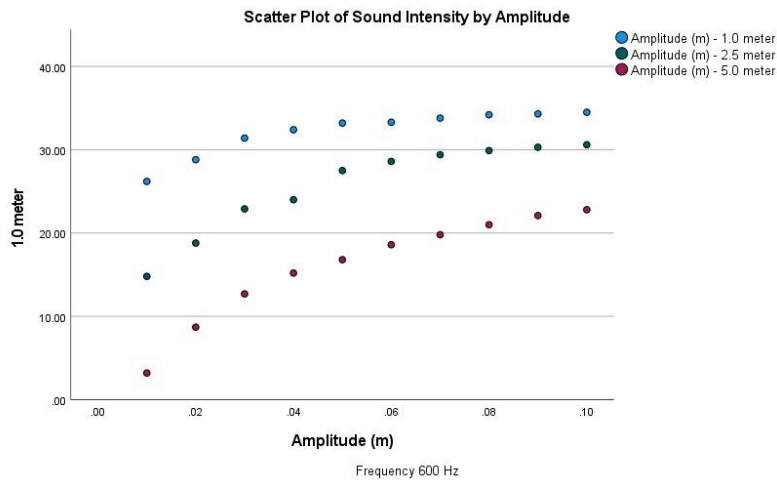


Figure 7. Graph of the Relationship Between Sound Intensity and Amplitude at a Frequency of 600 Hz

Sound intensity (dB) shows a clear positive trend with increasing amplitude for all measurement distances. The rate of dB increase appears steeper at low amplitudes and then slightly levels off at higher amplitudes, especially for the 1.0 m and 2.5 m distances. The 1.0 m distance consistently exhibits the highest dB values, followed by 2.5 m and then 5.0 m which shows the lowest dB values for each specific amplitude. A similar trend is observed at the frequency of 400 Hz, where sound intensity increases with amplitude for all distances. The absolute dB values at 500 Hz tend to be higher compared to 400 Hz for corresponding amplitudes and distances. The absolute dB values at 600 Hz generally produce higher dB levels than those at 400 Hz and 500 Hz for the same amplitude and distance. The leveling-off effect at high amplitudes is also evident. Overall, it is observed that increasing frequency consistently results in higher sound intensity (dB) at all amplitude levels and distances (Pinochet et al., 2021). Furthermore, attenuation of sound intensity due to distance is clearly seen, with stratification of intensity levels based on distance across all tests.

The results of the experiment on the effect of spreading angle on the reflection angle of sound waves are shown in Figure 8. Measurements were conducted at a frequency of 550 Hz with amplitude variations of 0.01 m, 0.05 m, and 0.10 m, and incidence angles of 90°, 45°, and 18°.

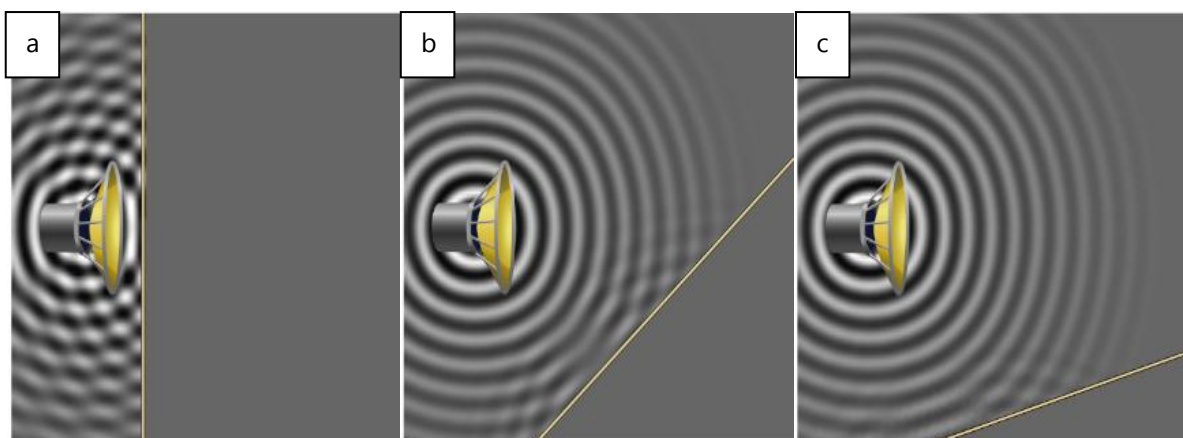


Figure 8. Reflection and Interference of Sound Waves Relative to Spreading Angle. (a) 90° Angle, (b) 45° Angle, (c) 18° Angle

Figure 8a shows waves appearing to radiate from the sound source and reflecting back from a vertical wall. The incident and reflected wavefronts are largely parallel, resulting in a clear superposition. Regions of constructive and destructive interference form a pattern resembling standing waves near the wall. When the wall is tilted, the incident waves strike the wall and reflect at an angle. The reflected waves interact clearly with the subsequent incident waves. The interference pattern is more complex compared to Figure 8b, with different regions of constructive and destructive interference forming an oblique pattern. A wall at a steeper angle produces distinct reflections and interference patterns. The areas of constructive and destructive interference differ from those in Figure 8c, illustrating how the angle of the reflecting surface determines the spatial distribution of the interference field (Zagubień & Wolniewicz, 2024).

The results of the experiment on the effect of air pressure on sound intensity are plotted in the graph presented in Figure 9. Measurements were conducted at a frequency of 550 Hz with amplitude variations of 0.01 m, 0.05 m, and 0.10 m, and air pressure ranging from 0.0 atm to 1.0 atm.

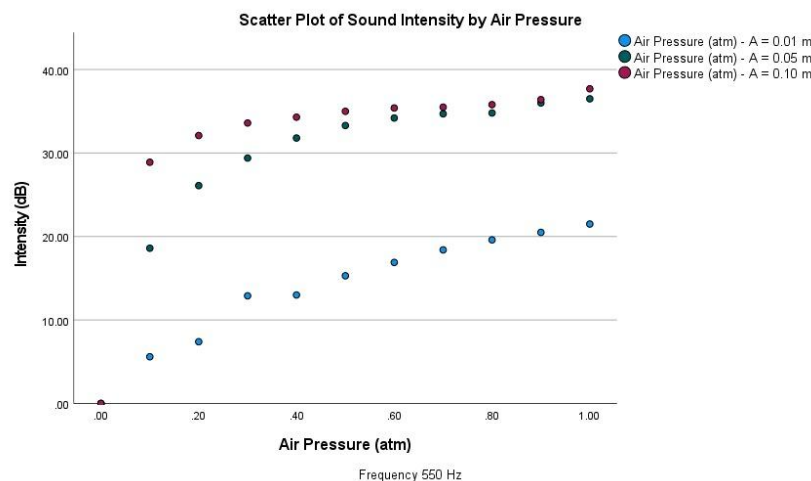


Figure 9. Graph of the Relationship Between Sound Intensity and Air Pressure

Figure 9 shows that for all three amplitude levels, the sound intensity is 0.0 dB at an air pressure of 0.0 atm. As air pressure increases, the sound intensity (dB) rises significantly (Pinochet et al., 2021). The most rapid increase occurs at low pressure levels, after which the rate of increase in dB becomes less steep, although the intensity continues to rise. Higher amplitudes consistently produce higher dB values at every air pressure above zero. This confirms that a medium is necessary for the propagation of sound waves, and the relationship between air pressure and sound intensity (dB) is nonlinear (Costa et al., 2023).

Analysis of the Influence of Amplitude and Frequency on Sound Wave Intensity

The research results show that the sound intensity increases along with the increase in amplitude. This finding aligns with the basic principle that the intensity (I) of a wave is proportional to the square of its amplitude (A). This means that doubling the amplitude results in an increase in intensity (power per unit area) by a factor of four. The decibel (dB) scale is logarithmic and is used to express the ratio between a certain amplitude value and a reference value. The general formula for calculating decibels is:

$$dB = 10 \log_{10} \frac{P}{P_0} \quad (1)$$

Where P is the power or sound intensity being measured, and P_0 is the reference power or intensity, which is usually the human hearing threshold of 10^{-12} watts per square meter (watt/m^2). Sound intensity measurements using the Phyphox application can show both positive and negative values. Positive values ($dB > 0$) indicate that the sound amplitude is greater than the reference value, meaning the sound is loud or strong, such as a car horn reaching around 100 dB . A zero value ($dB = 0$) means the sound amplitude is equal to the reference value. This does not mean there is no sound, but rather a very faint sound exactly at the threshold of human hearing. Negative values ($dB < 0$) indicate that the sound amplitude is less than the reference value, meaning the sound is very weak or almost inaudible, like a soft whisper in a very quiet room.

Consequently, although the actual sound energy increases significantly with amplitude, the perceived loudness (related to dB) increases more slowly (Zagubień & Wolniewicz, 2024). The "flattening" phenomenon observed in the dB versus Amplitude graphs (Figures 4, 5, 6) at higher amplitudes is a manifestation of logarithmic scaling (Fajarwati et al., 2023). For example, an increase in intensity from $10^{-6} \text{ W}/\text{m}^2$ to $10^{-5} \text{ W}/\text{m}^2$ (a tenfold increase) corresponds to a 10 dB . However, an increase from $10^{-3} \text{ W}/\text{m}^2$ to $2 \times 10^{-3} \text{ W}/\text{m}^2$ (a twofold increase) only corresponds to an increase of about 3 dB . This explains why large changes in amplitude at high intensity levels result in smaller dB increases compared to similar proportional changes at low intensity levels (Fajarwati et al., 2023). For instance, if the amplitude is doubled, the intensity increases fourfold, and the change in dB would be:

$$10 \log(4I_1/I_0) - 10 \log(I_1/I_0) = 10 \log(4) \approx 6 \text{ dB} \quad (2)$$

The experimental data also show that for a constant amplitude, higher frequencies generally produce higher sound intensities. This is consistent with the theoretical relationship:

$$I = \frac{1}{2} \rho v (\omega s_{\max})^2 \quad (3)$$

where $\omega = 2\pi f$ is the angular frequency and $s_{\max}$ is the maximum displacement amplitude. If ρ and v is constant (e.g. in air), then $I \propto (\omega s)^2 = (2\pi f s)^2$, armeans that the intensity increases quadratically with frequency and amplitude. For a constant amplitude, the intensity is proportional to the square of the frequency. A higher frequency means more wave cycles passing a point per unit time. If the deviation per cycle (amplitude) is the same, then more cycles mean more energy delivered per unit time, resulting in higher power and intensity (Costa et al., 2023).

Relative value f^2 of each If the frequency value is against 400 Hz as a reference. At 400 Hz, the squared value of the frequency is $400^2=160000$, which is normalized to 1.00. At 500 Hz, the squared value of the frequency is $500^2=250000$, or about 1.56 times greater than 400 Hz. Meanwhile, for 600 Hz, $600^2=360000$, or 2.25 times greater than 400 Hz. However, the PhET simulation results show that the intensity at 600 Hz actually increases more on a linear scale than 400 Hz.

This considerable difference is likely due to several factors. First, although the amplitude is set as "maximum" in the simulation, the particle displacement (s) may not be exactly the same between frequencies. If the value of s at 600 Hz is slightly larger, so its square (s^2) will

have a significant impact on the increase in intensity. Secondly, the way waves propagate in the simulation could be affected by the characteristics of the virtual medium, so waves at higher frequencies such as 600 Hz may experience smaller attenuation or a more focused propagation shape, resulting in greater intensity. Thirdly, it is possible that the representation of intensity in the PhET simulation is not completely linear with respect to f^2s^2 instead, it mixes aspects of visualization with audio perception. This can lead to discrepancies between purely mathematical theoretical predictions and visual or numerical results from simulations.

The increase in intensity at 600 hz is more likely to be a result of the prevailing laws of physics, rather than an artifact of the simulation. This is supported by several reasons, firstly consistency with physical theory. Theoretically, the intensity of a sound wave follows the relationship $I \propto f^2s^2$, where intensity is directly proportional to the square of amplitude and the square of frequency. Assuming the amplitude is fixed, an increase in frequency directly leads to an increase in intensity. In this case, the comparison between 600 hz and 400 hz predicts an increase of about 2.25 times, and the direction of the trend is reflected in the simulation results. The two patterns of intensity decrease with distance are reasonable. The data shows that the intensity decreases from near to far positions in a logical manner, following wave propagation principles such as the inverse square law of distance. This shows that the simulation represents the energy propagation process realistically, rather than randomly or erroneously. Third, the stability of values between observation points. The intensities recorded at the near, medium and far points remained consistent at each frequency. Although there were slight fluctuations, there were no noticeable anomalies that would normally indicate numerical noise or graphical errors in the simulation. Fourth, the impact of small amplitude differences on intensity. If there is a small difference in the amplitude of the source at a frequency of 600hz-for example, because the "maximal" visualization setting is not identical across frequencies-then the impact on intensity can be very large, as intensity depends on the square of the amplitude. This may explain why the increase in intensity is higher than the theoretical prediction of f^2 course.

Thus, it can be concluded that the increase in intensity at a frequency of 600 Hz is a logical consequence of the laws of physics, and is influenced by propagation efficiency and possibly small variations in source amplitude.

Analysis of Reflection and Interference of Waves Due to Angle of Propagation

Experimental data consistently show that the angle of incidence is equal to the angle of reflection for various amplitudes and angles of incidence. Figure 8 clearly illustrates the wave interference phenomenon resulting from the superposition of incident and reflected sound waves. The incident sound wave travels from the left or right direction, while the reflected wave originating from the surface reflection travels from the opposite direction. When these two waves meet and interact, superposition occurs, which is the fusion of two waves that produces a new wave pattern called a standing wave. In these standing waves, two types of important points are formed, namely nodes and antinodes. Nodes(●) are points along the wave where the amplitude is always zero. This happens because the incident and reflected waves meet each other in opposite phases (180° phase difference), thus canceling each other out(minimum amplitude) a condition known as destructive interference. Destructive interference occurs when $\Delta s = (n + 1/2)\lambda$ where Δs denotes the difference in trajectory between the two waves, λ denotes the wavelength of the sound and n denotes an integer ($n = 1,2,3,...$). In contrast, antinode points are those points where the amplitude of the waves reaches a maximum value. This point is formed when the two waves meet in the same phase,

so their amplitudes amplify each other, resulting in constructive interference. Constructive interference occurs when $\Delta s = n\lambda$. The resulting standing wave pattern shows that the distance between two consecutive nodes or two consecutive antinodes is half a wavelength (λ). $\lambda/2$).

Figure 8a shows clear constructive and destructive interference, forming a pattern that resembles a standing wave. This occurs because the incident and reflected waves travel in directly opposite directions, resulting in fixed points with maximum and minimum deviation. (Mahardhika & Darsono, 2024). Figure 8b and Figure 8c show how changing the angle of the reflecting surface changes the geometry of the interference pattern. The constructive and destructive interference regions are spatially redistributed based on the angle of reflection, creating a more complex pattern of skewed edges. This is because the difference in trajectory between the incident and reflected waves arriving at a particular point changes with the angle of reflectance.

Analysis of the Effect of Air Pressure on Sound Wave Intensity

Experimental results show that the sound intensity is zero at zero air pressure, regardless of the source amplitude. This confirms that sound, as a mechanical wave, requires a medium for propagation. Without air particles to oscillate and transfer energy, sound cannot propagate (Vishnu et al., 2023).

The sound intensity (I) is related to the pressure amplitude of the sound wave (Δp_{sound}), the density of the medium (ρ), and the speed of sound in the medium (v) through the equation:

$$I = \frac{(\Delta p_{\text{sound}})^2}{2\rho v} \quad (4)$$

The term ρv is the characteristic acoustic impedance (Z) of the medium. Air pressure is directly related to air density (ρ) assuming constant temperature, through the ideal gas law. As air pressure increases, density increases, resulting in higher acoustic impedance.

The graph in Figure 9 shows that as air pressure increases from zero, sound intensity also rises significantly. This indicates a more efficient energy transfer from the sound source to the medium and through the medium. At very low pressure, the medium is sparse, leading to poor energy transfer. As pressure increases, the medium becomes denser, allowing for better coupling and more effective propagation of sound energy. Sound is a vibration of particles; more particles mean the transfer of vibrational energy is more efficient (Costa et al., 2023). Acoustic impedance represents the medium's resistance to acoustic flow. The data shows intensity increases with pressure, indicating the medium's improved capacity to carry sound energy. A study by Vishnu et al. (2023) on underwater noise emissions, although in a different medium, underscores the importance of the medium's properties in sound generation and propagation.

The observed non-linear increase in dB with rising air pressure (Figure 9) can be attributed to fundamental physics and the logarithmic nature of the dB scale. Even the presence of a small amount of medium initially allows sound propagation, leading to a large relative increase from zero intensity. As pressure (and density) continues to increase, the absolute intensity keeps rising, but the dB increment becomes smaller for equivalent linear changes in pressure, especially if the relationship between pressure and actual intensity itself is non-linear (Pinochet et al., 2021). Research on sound propagation under various

atmospheric conditions often considers the effects of pressure, temperature, and humidity on absorption and speed, which in turn influence intensity over distance.

Implications of Research Based on PhET Simulations

Simulation using PhET allows controlled manipulation of variables and visualization of concepts that are difficult to observe directly in traditional laboratories. The effectiveness of PhET in enhancing conceptual understanding has been documented in various studies (Nuryantini et al., 2021). However, PhET simulations are idealizations of real-world conditions. The simulations may not account for all factors affecting sound propagation, such as air turbulence, complex reflections from uneven surfaces, or the full spectrum of atmospheric absorption effects. The representation of wave interactions and medium properties may be simplified. For example, the exact algorithm by which the "amplitude" setting in PhET translates to physical displacement or pressure amplitude, and how "air pressure" affects density and sound speed, might involve underlying assumptions not fully transparent to users. Additionally, the simulation may not include all relevant variables that can influence sound characteristics in real-world scenarios, such as humidity and temperature gradients (Nuryantini et al., 2021).

Advantages of the simulation include its ability to isolate variables and demonstrate core principles. However, this control comes at the cost of potentially oversimplifying the rich acoustic complexities of the real world. PhET aims to effectively teach fundamental concepts by simplifying reality and removing distracting variables (Mahardhika & Darsono, 2024). For example, in reflection simulations, the walls are likely perfect reflectors, and the medium is perfectly homogeneous. In reality, surfaces absorb and scatter sound, and the air exhibits micro variations. This means that although the simulation accurately demonstrates the principles of reflection and interference, precise quantitative results may differ from physical experiments due to real-world imperfections. Findings from the simulation should be understood as illustrations of fundamental concepts, and caution is necessary when directly extrapolating quantitative results to specific and complex real-world applications without further validation (Nuryantini et al., 2021). This research could be expanded by comparing simulation results with physical experiments or more advanced computational acoustic models to assess the degree of idealization within PhET.

CONCLUSION

The research findings show that sound intensity increases non-linearly on the decibel scale with rising amplitude and frequency. Greater amplitude produces higher wave energy, while higher frequency accelerates the rate of energy transfer. In terms of geometry, the angle of reflection is proven to be equal to the angle of incidence, in accordance with the law of reflection, while the dispersion angle influences complex interference patterns resulting from the superposition of incident and reflected waves. An increase in air pressure also leads to a non-linear rise in sound intensity, reinforcing the crucial role of the medium in sound propagation.

The PhET simulation has proven effective in visualizing fundamental acoustic principles but has limitations due to the idealization of physical conditions. Therefore, direct physical experiments, such as using a pressurized chamber to validate the effect of pressure on sound intensity, are recommended to improve the accuracy of results. Furthermore, future studies should consider other environmental variables such as temperature and humidity, as these factors can affect the speed and intensity of sound wave propagation, yet were not covered

in this simulation. A combination of simulations, physical experiments, and advanced computational modeling will offer a more comprehensive understanding of acoustic phenomena under real-world conditions.

REFERENCES

- Amelia, N., Kusumaningtyas, N. C., HF, A. R., Sulistiyowati, A., & Mufida, J. (2023). Rancang Bangun Alat Praktikum Resonansi Bunyi Dengan Menentukan Cepat Rambat Bunyi Di Udara Pada Pipa Kecil dan Pipa Besar. *Jurnal Ilmiah Wahana Pendidikan*, 9(14), 546-552.
- Bosia, F., Dal Poggetto, V. F., Gliozzi, A. S., Greco, G., Lott, M., Miniaci, M., Ongaro, F., Onorato, M., Seyyedizadeh, S.F., Tortello, M. & Pugno, N. M. (2022). Optimized structures for vibration attenuation and sound control in nature: A review. *Matter*, 5(10), 3311-3340.
- Costa, J. P., Baptista, M., Conceição, T., & Maurício, P. (2023). Construct map development for the propagation of sound in the air. *EURASIA Journal of Mathematics, Science and Technology Education*, 19(9), em2327.
- Eka, O. (2023). *Pengembangan e-modul fisika pada materi gelombang berbasis mitigasi kebencanaan di SMA/MA kelas XI*. (Doctoral dissertation, UIN Raden Intan Lampung).
- Fajarwati, L., Feriadi, Y., & Widjiati, E. (2023). Underwater Acoustic Intensity Analysis using Noise Assisted-MEMD with Varying Distances. *Jurnal Teknik Elektro*, 15(1), 24-29.
- Fitri, N. A., Sa'adah, N., Fikriya, S., Suryandari, K. C., & Fatimah, S. (2023). Analisis Gelombang Bunyi Melalui Alat Peraga Sederhana dan Relevansinya dalam Pembelajaran di SD. In *Social, Humanities, and Educational Studies (SHES): Conference Series* (Vol. 6, No. 1, pp. 617-624).
- Kho, W. K. (2014). Studi material bangunan yang berpengaruh pada akustik interior. *Dimensi Interior*, 12(2), 57-64.
- Kurniawan, A., Herlinawati, H., & Marasabessy, R. (2024). Pemanfaatan PhET colorado untuk meningkatkan hasil belajar siswa pada materi rangkaian listrik. *Asian Journal Collaboration of Social Environmental and Education*, 1(2).
- Ledjab, F. A. W., Koli, K., Tahu, M. V. F., & Dewa, E. (2024). Inovasi Pembelajaran Fisika: Integrasi Problem Based Learning dan Simulasi PhET pada Materi Gelombang Bunyi. *MAGNETON: Jurnal Inovasi Pembelajaran Fisika*, 2(2), 112-119.
- Li, M., Wang, M., Ding, R., Deng, T., Fang, S., Lai, F., & Luoi, R. (2021). Study of acoustic emission propagation characteristics and energy attenuation of surface transverse wave and internal longitudinal wave of wood. *Wood Science and Technology*, 55, 1619-1637.
- Machado, M. R., & Dos Santos, J. M. C. (2021). Effect and identification of parametric distributed uncertainties in longitudinal wave propagation. *Applied Mathematical Modelling*, 98, 498-517.
- Mahardhika, S. R., & Darsono, T. (2024). Pengembangan Modul Praktikum Interferensi Gelombang Bunyi Berbantuan Visual Analyser. *Unnes Physics Education Journal*, 13(1), 9-14.
- Maulana, S. (2020). Pengaruh Perubahan Temperatur terhadap Respon Amplitudo dengan Menggunakan Gelombang Ultrasonik pada Pola Aliran Slug Pipa Horisontal. *Jurnal Inovasi Mesin*, 2(2), 43-50.
- Muhtar, E. (2022). Pengaruh Pendekatan Ketrampilan Proses Dalam Meningkatkan Hasil Belajar Fisika Pada Konsep Getaran Dan Gelombang Pada Peserta Didik Kelas VIII

- SMP Negeri 17 Halmahera Selatan. *KUANTUM: Jurnal Pembelajaran Dan Sains Fisika*, 3(1), 38-62.
- Muin, M. P. (2023). *Metode penelitian kuantitatif*. CV Literasi Nusantara Abadi.
- Mulyaningsih, R. S. (2024). Effect of amplitude and frequency on the speed of sound waves in air and water using PhET simulation. *Jurnal Pendidikan dan Ilmu Fisika*, 4(1), 40.
- Nuryantini, A. Y., Zakwandi, R., & Ariayuda, M. A. (2021). Home-made simple experiment to measure sound intensity using smartphones. *Jurnal Ilmiah Pendidikan Fisika Al-Biruni*, 10(1), 159-166.
- Pinochet, J., Cortada, W. B., & Peña, M. S. (2021). Graphic relation between amplitude and sound intensity level. *The Physics Teacher*, 59(6), 467-469.
- Qowiyyah, S. N. (2022). Kemakbulan Doa dalam Perspektif Al-Qur'an dan Fisika Gelombang. *Qaf: Jurnal Ilmu Al-Qur'an dan Tafsir*, 4(1), 45-67.
- Rijal, M. (2024). *Pengembangan Buku Saku Elektronik Berbasis Google Sites pada Materi Gelombang Bunyi dan Cahaya Tingkat SMA/MA* (Doctoral dissertation, UIN Ar-Raniry Banda Aceh).
- Rismawan, H., & Aisiyah, M. C. (2023). Menentukan Nilai Periode, Amplitudo, Frekuensi Dan Memvisualisasi Getaran Harmonik Pada Pegas Dalam Bentuk Gelombang. *Jurnal Fisika: Fisika Sains Dan Aplikasinya*, 8(1), 25-29.
- Siregar, D. A. (2022). Pengaruh penggunaan metode demonstrasi terhadap hasil belajar fisika siswa pada materi pokok gelombang bunyi kelas XII di SMA Negeri Batang Onang. *Jurnal Physics Education (PhysEdu)*, 4(3), 11.
- Vishnu, H., Deane, G. B., Glowacki, O., Chitre, M., Johnson, H., Moskalik, M., & Stokes, D. (2023). Depth-dependence of the underwater noise emission from melting glacier ice. *JASA Express Letters*, 3(2).
- Widiansyah, M. G. (2021). Tutorial Praktikum Resonansi Gelombang Bunyi Menggunakan Teknologi Augmented Reality Dan Metode Fuzzy Mamdani. *Universitas Komputer Indonesia*.
- Zagubieć, A., & Wolniewicz, K. (2024). Measurements and Analysis of Sound Reflections from Selected Building Façades. *Applied Sciences*, 14(24), 11627.

PUBLISH

buat alView ItInbox [CJPF]SeComAnalysinggrisGoogleSINTASINTASINTA

jurnal.ustjogja.ac.id/index.php/COMPTON/authorDashboard/submission/19942

Compton: Jurnal Ilmiah Pendidikan Fisika

Back to Submissions

19942 / Setya et al. / Analysis of the influence of amplitude, frequency, angle of propagation, and air pressure on the characteristics of Library

WorkflowPublication

SubmissionReviewCopyeditingProduction

Copyediting Discussions

Add discussion

Name	From	Last Reply	Replies	Closed
LOA	sony_erlangga	-	0	☐
Final Verification Required Before Publication	sony_erlangga	-	0	☐

Copyedited

Search

No Files

22°C
Cerah

Search

99+

20:57
09/07/2025

LOA ✕

Participants

Sony Yunior Erlangga (sony_erlangga)
winda setya (windasety4)

Messages

Note

From

Dear Author(s),

We are delighted to inform you that your manuscript has been **accepted for publication** after a thorough peer-review process. Congratulations on this outstanding achievement!

Your research makes a valuable contribution to the field, and we sincerely appreciate your dedication to academic excellence. We are honored to publish your work and look forward to your future contributions.

Thank you for choosing our journal as a platform for your scholarly work. May this accomplishment inspire further innovation and success in your research journey.

sony_erlangga

2025-06-18 12:19 PM

ISSN : 2356-0673 (Print) | 2579-5252 (Online)

Compton: Jurnal Ilmiah Pendidikan Fisika

Pendidikan Fisika Universitas Sarjanawiyata Tamansiswa

sinta

S2

Assalamualaikum wr wb,

Acceptance Letter for the Manuscript ID # 19942

Dear Setya et al.,

I would like to say Congratulation!

After going through a series of peer reviews, I am pleased to inform you that your manuscript (19942) entitled "Analysis of the influence of amplitude, frequency, angle of propagation, and air pressure on the characteristics of sound waves" is **accepted**. Your manuscript has been published in Volume 12 No. 1 (2025) of "Compton: Jurnal Ilmiah Pendidikan Fisika".

Thank you for submitting your article to "Compton: Jurnal Ilmiah Pendidikan Fisika". We welcome your contributions in future.

Yogyakarta, 25 May 2025

Editor In Chief,



Sony Yuniar Erlangga, M.Pd.

Participants



Sony Yunior Erlangga (sony_erlangga)

winda setya (windasety4)

Messages

Note	From
Dear Author(s), We are pleased to inform you that your manuscript has been approved for publication. Before we proceed, we kindly request you to review the attached final version to ensure all details (e.g., author names, affiliations, content, and formatting) are accurate. Important Instructions: Review your manuscript carefully (attached or accessible via the link below). Submit any corrections ⚠ If no response is received within 3 (three) days, the manuscript will be considered final and approved for publication as-is. Please address any revisions promptly by replying to this email with clear notes. We appreciate your cooperation in ensuring the accuracy of your published work.  CE setya.doc	sony_erlangga 2025-06-18 12:19 PM

Add Message

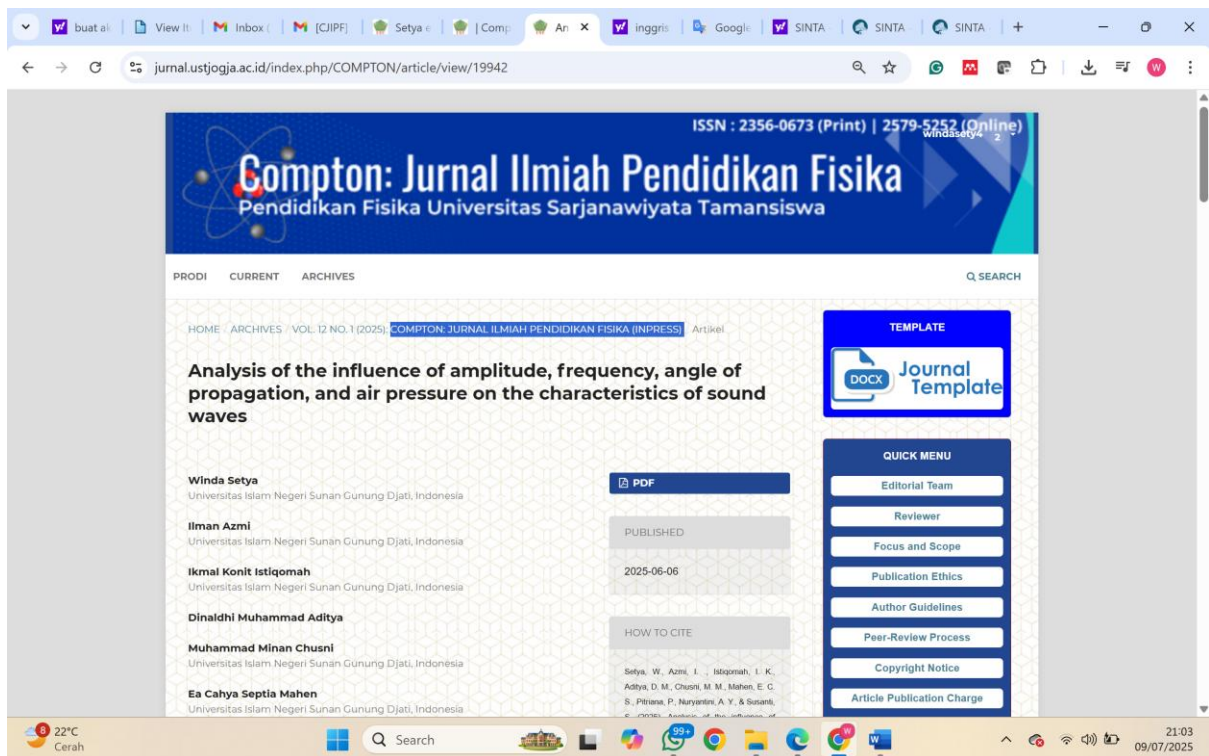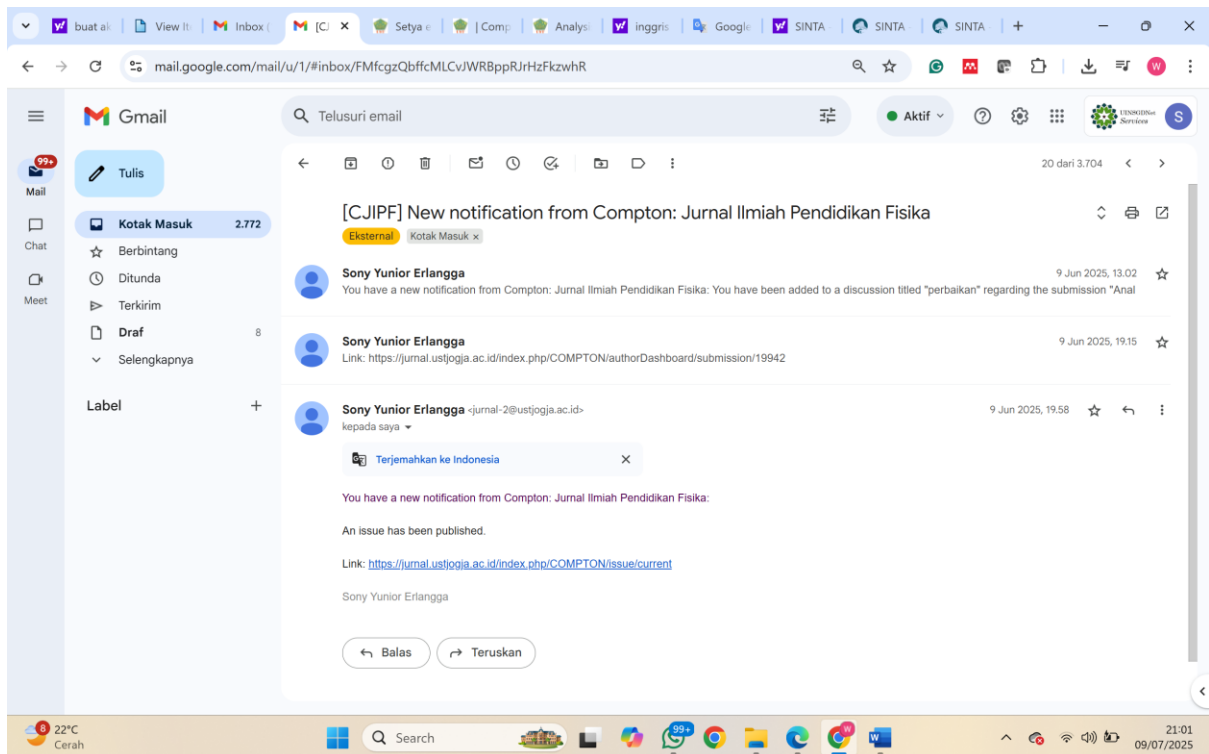

Link web : <https://jurnal.ustjogja.ac.id/index.php/COMPTON/article/view/19942>

Link artikel PDF: <https://jurnal.ustjogja.ac.id/index.php/COMPTON/article/view/19942/7484>

Analysis of the influence of amplitude, frequency, angle of propagation, and air pressure on the characteristics of sound waves

Winda Setya*, Ilman Azmi, Ikmal Konit Istiqomah, Dinaldhi Muhammad Aditya, Muhammad Minan Chusni, Ea Cahya Septia Mahen, Pina Pitriana, Ade Yeti Nuryantini, Seni Susanti

Program Studi Pendidikan Fisika, UIN Sunan Gunung Djati, Bandung, Indonesia

*Corresponding Author. E-mail: suratwindasetya@uinsgd.ac.id

Abstract: This study offers a comprehensive approach that has not been widely explored, integrating PhET interactive simulations and the Phyphox sensor application to analyze the simultaneous influence of four physical parameters amplitude, frequency, dispersion angle, and pressure on the characteristics of sound waves. The integration of PhET interactive simulations and the Phyphox application enables real-time visualization and experimental data measurement through smartphone sensors. Furthermore, this research contributes new insights by exploring the dispersion angle in the context of wave direction and intensity, a topic rarely discussed in digital media-based acoustic studies. The method used is a quantitative experiment with amplitude variations from 1 to 10 and frequencies of 400 Hz, 500 Hz, and 600 Hz, measured at distances of 1 cm, 3.25 cm, and 5.5 cm. The study also includes observations of reflection and interference patterns of waves at propagation angles of 18°, 45°, and 90°, as well as an analysis of the effect of air pressure on sound intensity, with pressure varied from 0.0 atm to 1.0 atm. The results show that sound wave intensity increases with higher amplitude and frequency, in accordance with the theory that intensity is proportional to the square of the amplitude. The propagation angle influences the reflection and interference patterns, resulting in varied energy distribution. Additionally, air pressure significantly affects sound intensity, emphasizing the crucial role of the medium in sound wave propagation.

Keywords: Sound Waves, Amplitude, Frequency, Air Pressure, Interference Patterns

INTRODUCTION

A wave is a propagating vibration. Waves occur due to the presence of a vibration source and can carry energy as they propagate. Waves can be classified based on the direction of propagation and the medium through which they travel. Sound waves are waves that propagate in a longitudinal direction, consisting only of compressions and rarefactions, and require a mechanical medium to travel (Muhtar, 2022). Sound is a longitudinal wave formed within a medium, whether the medium is solid, liquid, or gas (Mulyaningsih, 2024).



Although longitudinal mechanical waves have a wide frequency range, only certain frequencies can be detected by the human auditory system—those capable of producing the sensation of sound in the ears and brain. Sound can be heard due to the vibration of an object that acts as the sound source. These vibrations cause the surrounding air to vibrate, and the disturbance then propagates through the air medium until it reaches the eardrum. Sound waves are essentially periodic variations in air pressure along their path of propagation (Putri et al., 2024).

Sound waves occur when an object vibrates and the resulting vibrations affect the surrounding medium, creating regions of compression and rarefaction within the medium (Bosia et al., 2022). In this process, energy can transfer from one place to another or from one object to another, enabling longitudinal waves to travel through a medium (Machado, 2021). The displacement of molecules from their equilibrium position results in compressions and rarefactions. The maximum displacement or the greatest distance from the equilibrium point is referred to as the amplitude (Rismawan et al., 2023). In terms of molecular displacement, sound waves occur along a horizontal axis and take the form of compressions or rarefactions, which can be observed through pressure variations (Qowiyyah, 2022). The pressure of the medium increases during compressions, while it decreases during rarefactions (Li et al., 2021).

Sound waves possess fundamental properties common to all types of waves, such as interference, diffraction, refraction, and resonance (Rijal, 2024). Interference is a key wave characteristic that occurs when two or more sound waves meet and overlap in the same region, resulting in a new wave pattern (Siregar, 2022). Diffraction occurs when the direction of sound wave propagation changes as it passes around the edge or through an opening of a barrier, allowing it to spread into shadowed regions. The extent of diffraction largely depends on the relationship between the wavelength of the sound and the size of the obstacle. If the wavelength is larger than the obstacle, the diffraction effect becomes more pronounced (Kho, 2024). Resonance occurs when two objects share the same frequency. Additionally, when two waves with maximum amplitude meet and reinforce each other, they produce a loud humming sound (Widiansyah, 2021). The speed of sound wave propagation is influenced by its amplitude and frequency. However, since the speed of sound cannot be observed with the naked eye, simulations are needed to visualize it (Amelia et al., 2023). Sound can also be reflected, following the law of reflection, which states that the angle of incidence is equal to the angle of reflection. When sound is reflected, the following conditions apply: (1) the angle of incidence, the angle of reflection, and the normal line lie in the same plane; (2) the angle of incidence equals the angle of reflection (Afifah et al., 2025).

The study conducted by Rejeki (2024) examined the influence of amplitude and frequency on the speed of sound waves in air and water mediums using PhET simulations. The results showed that amplitude and frequency are directly proportional to the speed of sound wave propagation, and due to the higher particle density in water, sound waves travel faster in water compared to air. Amplitude determines the loudness of the sound; the greater the amplitude, the louder the sound and the higher the energy, since energy is proportional to the square of the amplitude. Meanwhile, frequency affects the pitch; a high frequency produces a sharp sound, while a low frequency produces a deep sound. In some cases, high frequencies also carry greater energy. Thus, amplitude and frequency play important roles in determining the characteristics and energy of sound waves.

The study conducted by Maulana (2020) found that changes in temperature and pressure affect the amplitude of ultrasonic waves in a liquid medium, which is directly related to the

amount of acoustic energy transmitted (Maulana, 2020). Additionally, frequency is known to influence the perception of pitch and is closely related to the vibration pattern of the sound source. Frequency is one of the main physical parameters affecting human perception of pitch. This frequency is closely associated with the periodic vibration pattern produced by the sound source, where the higher the vibration frequency, the higher the pitch perceived by the human auditory system.

Finally, the study conducted by Fitri (2023) demonstrated that air pressure is closely related to the speed of sound propagation, as pressure affects the particle density within the air medium, thereby influencing how longitudinal waves travel (Fitri, 2023). On the other hand, the wave spreading angle can also alter the direction and intensity of sound wave energy received at different spatial points, although this aspect has not been extensively explored experimentally. Based on theoretical understanding and supported by these findings, an initial hypothesis was formulated that amplitude, frequency, spreading angle, and air pressure simultaneously influence the characteristics of sound waves, including their intensity, propagation speed, and direction of spreading. A review of several other articles suggests that amplitude is believed to play a role in determining the magnitude of sound intensity perceived by the listener.

This study utilized the PhET Simulation platform developed by the University of Colorado to conduct experiments. This simulation media comprises educational materials in physics, chemistry, and biology, and is designed interactively to enable users to learn virtually (Kurniawan et al., 2023). The simulation supports the learning of physics concepts through detailed and interactive visualizations (Ledjab et al., 2024). Besides PhET, another platform that can be employed in this research is Phyphox. Phyphox is an application developed by RWTH Aachen University that allows users to conduct physics experiments using built-in smartphone sensors, such as microphones, accelerometers, magnetometers, gyroscopes, and light sensors (Imtinan & Kuswanto, 2023).

This study aims to examine the simultaneous influence of four physical parameters (amplitude, frequency, dispersion angle, and air pressure) on the characteristics of sound waves, which has not been comprehensively addressed in previous research. It also integrates two digital platforms PhET interactive simulations and the Phyphox application which enable real-time visualization of wave patterns and experimental data measurement using smartphone sensors. Moreover, the dispersion angle, which has rarely been explored, is analyzed in the context of wave propagation direction and intensity, thereby providing a new contribution to digital media-based acoustic studies.

METHOD

This study employs a quantitative approach with an experimental design to analyze the effects of amplitude, frequency, dispersion angle, and air pressure on the characteristics of sound waves using PhET simulations (Eka, 2023). The quantitative approach in this research refers to the use of numerical data generated from experiments to measure, analyze, and test the relationships among variables involved in the physical phenomenon of sound waves (Widyastuti et al., 2024). Through this approach, the study aims to produce data that can be statistically analyzed to identify patterns or trends that may exist in changes to sound wave characteristics. PhET simulations were chosen for their ability to provide a clear visual representation of the interactions between these physical factors, allowing researchers to directly manipulate variables and observe the outcomes in a controlled and interactive environment. This approach offers an opportunity to explore complex acoustic phenomena,

measure the mathematical relationships among these variables, and obtain data that can be used to deepen understanding of the behavior of sound waves under various physical conditions.

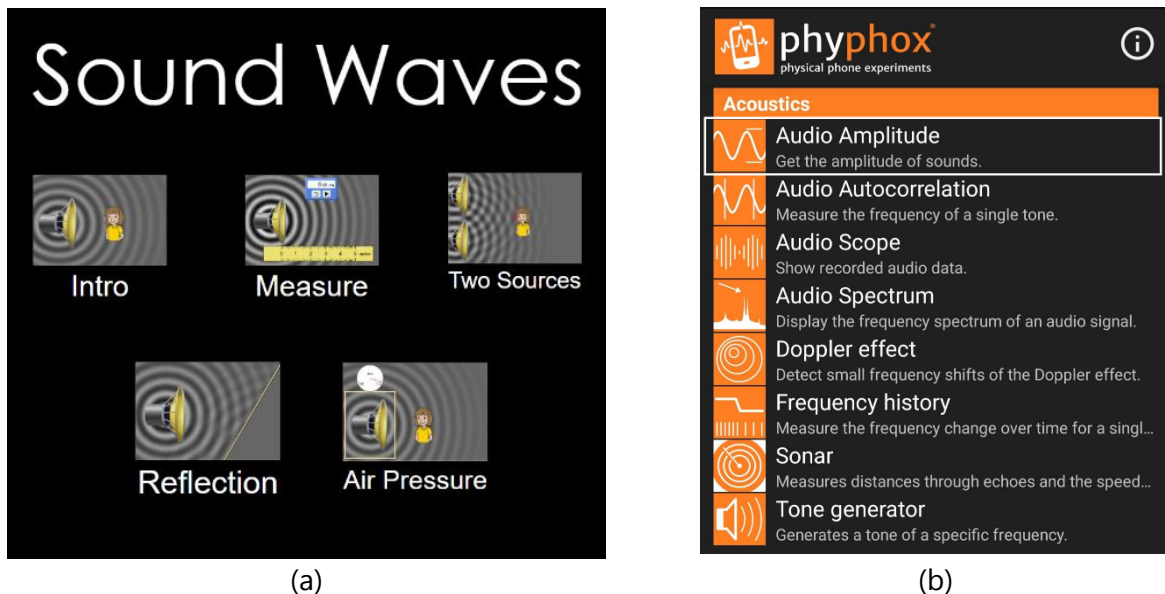


Figure 1. Application Interface. (a) *Sound Wave* experiment on PhET Simulation and (b) *Audio Amplitude Experiment* on the Phyphox application

The experiment begins by opening the "Sound" simulation on the PhET website, which is designed to test various factors that affect the characteristics of sound waves. In this experiment, the Phyphox application is used to help measure the amplitude of the produced sound. The use of Phyphox in the sound wave experiment aims to measure audio amplitude. The PhET simulation is run on a Lenovo Yoga Slim 7i Carbon 13ITL5 laptop, and Phyphox is operated on a Samsung S23 Ultra mobile phone.

In the Sound simulation on PhET Interactive Simulations, the amplitude setting refers to the displacement amplitude of particles in the medium, which is visualized through the vibration of particles around their equilibrium position; the greater the amplitude, the greater the particle displacement. Although it does not directly represent pressure amplitude, this particle displacement is closely related to pressure variations in longitudinal waves, so an increase in displacement amplitude also reflects an increase in pressure amplitude.

First, the experiment analyzes the effect of amplitude and frequency on the intensity of sound waves, conducted at three frequency levels: 600 Hz, 500 Hz, and 400 Hz. The selection of these frequencies is based on the range commonly found in various acoustic phenomena in the surrounding environment, particularly in the context of sound waves used by many organisms for communication and navigation. These frequencies are low enough to allow the waves to travel moderate to long distances without significant absorption, yet remain within a range that is easy to measure and analyze in the simulation. Each frequency is tested with three amplitude categories maximum (1000), medium (550), and minimum (100) to observe changes in the shape and intensity of the resulting sound waves.

Next, the experiment continues by observing the effect of sound waves produced by two adjacent sound sources, focusing on the listener's position relative to the left speaker at distances of 1 cm, center at 3.25 cm, and right at 5.5 cm. Three frequency variations 1000 Hz, 500 Hz, and 250 Hz are tested with three amplitude categories (maximum, medium, and

minimum) to observe changes in the characteristics of sound waves at different positions, as illustrated in Figure 2.

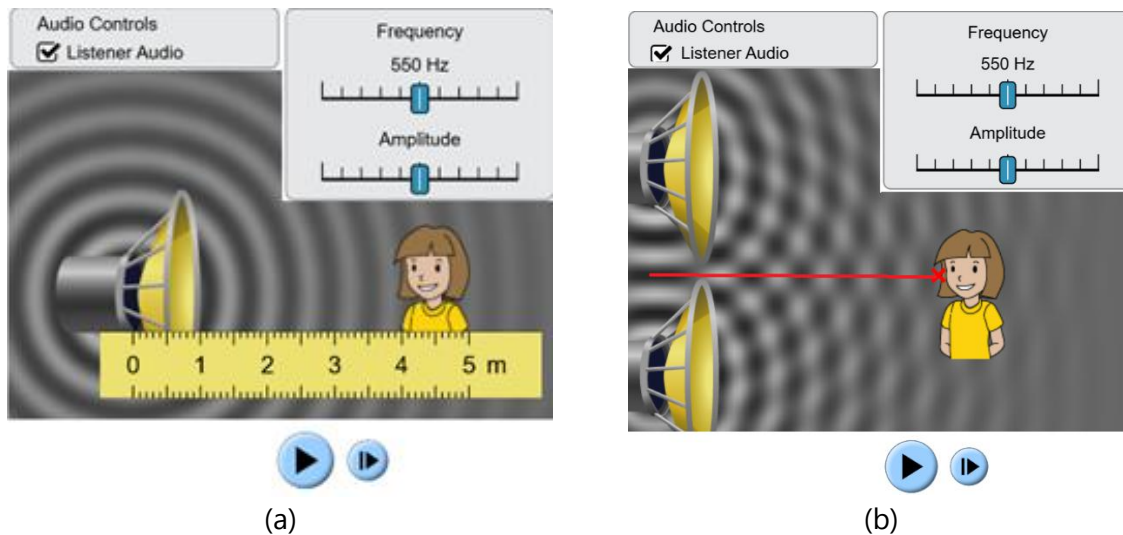


Figure 2. PhET Simulation Experiment Display. (a) Measure single sound, and (b) Measure double sound

Sound measurements were conducted using the Phyphox application through the Audio Amplitude Experiment feature. In this application, sound amplitude is displayed in decibels (dB). The measurements were taken using the microphone sensor, which functions to capture the intensity of the produced sound. Higher decibel values indicate greater sound amplitude, meaning the sound is stronger or louder. Phyphox also provides a real-time visual display, making it easier for users to observe and analyze changes in noise levels or sound intensity during the experiment. The interface of the Audio Amplitude Experiment in Phyphox is shown in Figure 3.

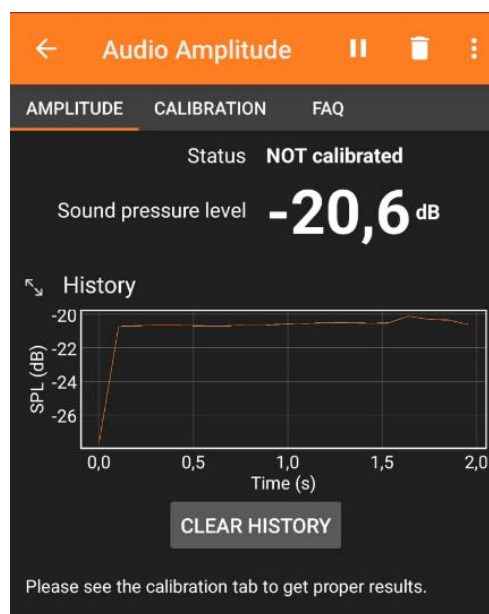


Figure 3. Interface of the Audio Amplitude Experiment in the Phyphox Application

Second, the experiment also analyzes the reflection and interference of sound waves caused by the dispersion angle. Observations were made on the effects of sound waves reflected at three different wall angles: 0° , 45° , and 90° , using a frequency of 500 Hz and three amplitude categories: maximum, medium, and minimum. The experimental setup is shown in Figure 4(a). The observations for maximum and minimum amplitude revealed differences in the patterns and characteristics of the sound waves produced at each of the three angles.

Third, the experiment analyzes the effect of air pressure on the intensity of sound waves by adjusting air pressure under different conditions, ranging from 0.0 atm to 1.0 atm, to observe changes in the speed and strength of the resulting sound waves. The pressure range from 0 to 1 atmosphere is used to demonstrate that the propagation of sound waves requires a medium. A pressure of 1 atm represents normal atmospheric conditions at the Earth's surface, which is ecologically relevant. In contrast, a pressure of 0 atm represents a vacuum in which sound cannot propagate although such conditions do not occur naturally on Earth, they are pedagogically important for understanding the fundamental concept of sound wave propagation. The experimental setup is shown in Figure 4(b). The results of all these experiments provide a deeper understanding of the factors that influence the characteristics of sound waves and their applications in the context of sound theory and technology.

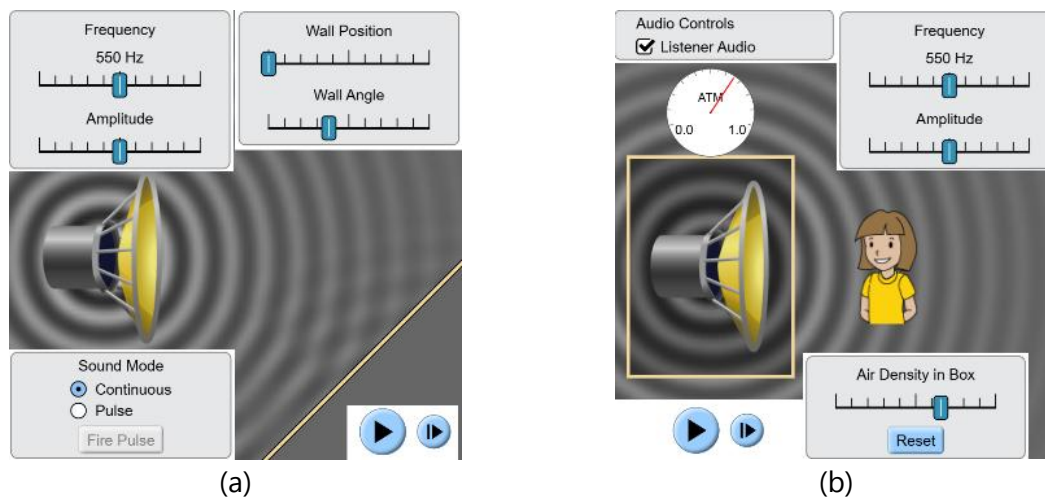


Figure 4. PhET Simulation Experiment Display. (a) Reflection, and (b) Air Pressure

The data obtained from this experiment were analyzed and presented in the form of graphs to facilitate understanding of the changes in sound wave characteristics influenced by variables such as amplitude, frequency, dispersion angle, and air pressure. Each graph illustrates the relationship between the tested variable and the observation results, such as the graph of sound intensity versus amplitude and the graph of sound intensity versus air pressure. The analysis was conducted by observing the trend of the graph's increase and comparing it with existing theories to determine whether the observations align with theoretical predictions (Muin, 2023). This approach makes it possible to evaluate the consistency between the experimental data and the fundamental principles of physics.

RESULTS AND DISCUSSION

The results of the experiment on the influence of amplitude and frequency on sound intensity at three different measurement distances are plotted in the relationship graphs

presented in Figures 4, 5, and 6. Measurements were conducted at frequencies of 400 Hz, 500 Hz, and 600 Hz with amplitude variations ranging from 0.01 m to 0.10 m. The study by Pinochet et al. (2021) has empirically demonstrated that the intensity of a sound wave is directly proportional to the square of its amplitude.

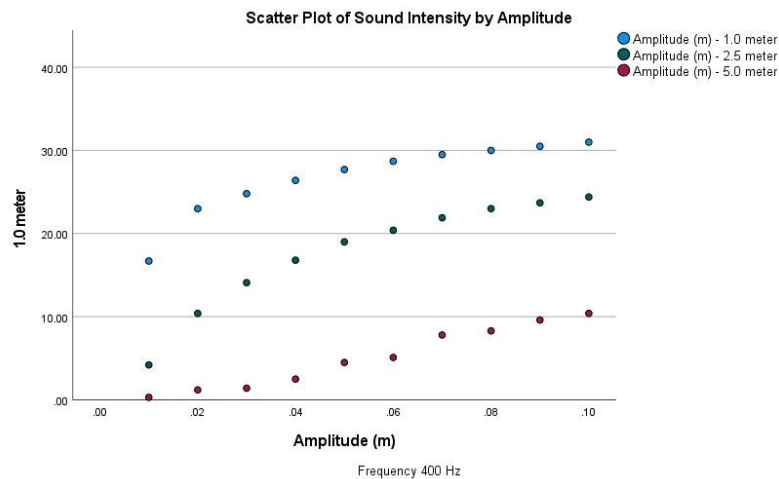


Figure 5. Graph of the Relationship Between Sound Intensity and Amplitude at a Frequency of 400 Hz

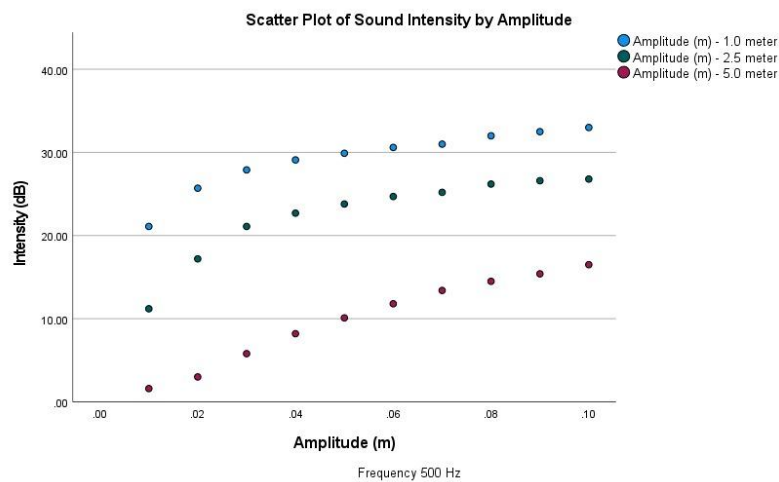


Figure 6. Graph of the Relationship Between Sound Intensity and Amplitude at a Frequency of 500 Hz

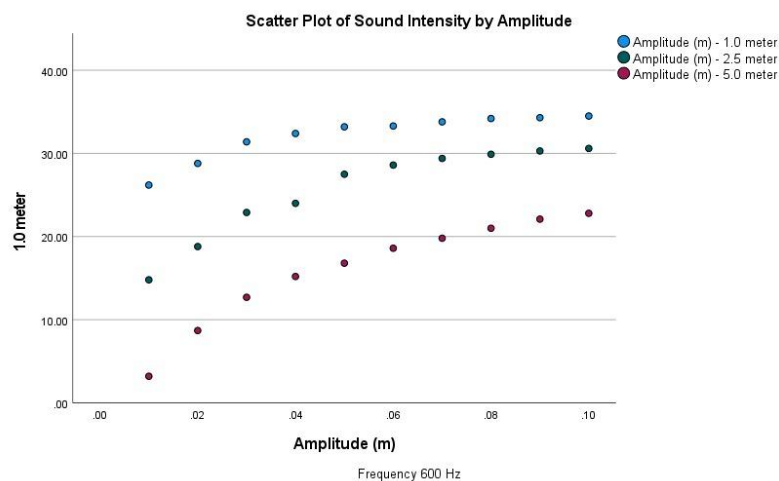


Figure 7. Graph of the Relationship Between Sound Intensity and Amplitude at a Frequency of 600 Hz

Sound intensity (dB) shows a clear positive trend with increasing amplitude for all measurement distances. The rate of dB increase appears steeper at low amplitudes and then slightly levels off at higher amplitudes, especially for the 1.0 m and 2.5 m distances. The 1.0 m distance consistently exhibits the highest dB values, followed by 2.5 m and then 5.0 m which shows the lowest dB values for each specific amplitude. A similar trend is observed at the frequency of 400 Hz, where sound intensity increases with amplitude for all distances. The absolute dB values at 500 Hz tend to be higher compared to 400 Hz for corresponding amplitudes and distances. The absolute dB values at 600 Hz generally produce higher dB levels than those at 400 Hz and 500 Hz for the same amplitude and distance. The leveling-off effect at high amplitudes is also evident. Overall, it is observed that increasing frequency consistently results in higher sound intensity (dB) at all amplitude levels and distances (Pinochet et al., 2021). Furthermore, attenuation of sound intensity due to distance is clearly seen, with stratification of intensity levels based on distance across all tests.

The results of the experiment on the effect of spreading angle on the reflection angle of sound waves are shown in Figure 8. Measurements were conducted at a frequency of 550 Hz with amplitude variations of 0.01 m, 0.05 m, and 0.10 m, and incidence angles of 90°, 45°, and 18°.

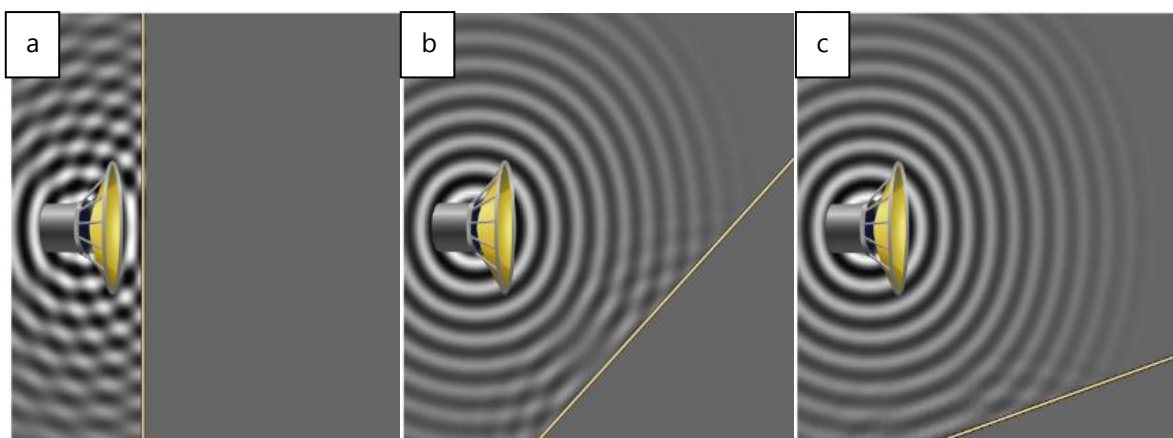


Figure 8. Reflection and Interference of Sound Waves Relative to Spreading Angle. (a) 90° Angle, (b) 45° Angle, (c) 18° Angle

Figure 8a shows waves appearing to radiate from the sound source and reflecting back from a vertical wall. The incident and reflected wavefronts are largely parallel, resulting in a clear superposition. Regions of constructive and destructive interference form a pattern resembling standing waves near the wall. When the wall is tilted, the incident waves strike the wall and reflect at an angle. The reflected waves interact clearly with the subsequent incident waves. The interference pattern is more complex compared to Figure 8b, with different regions of constructive and destructive interference forming an oblique pattern. A wall at a steeper angle produces distinct reflections and interference patterns. The areas of constructive and destructive interference differ from those in Figure 8c, illustrating how the angle of the reflecting surface determines the spatial distribution of the interference field (Zagubień & Wolniewicz, 2024).

The results of the experiment on the effect of air pressure on sound intensity are plotted in the graph presented in Figure 9. Measurements were conducted at a frequency of 550 Hz with amplitude variations of 0.01 m, 0.05 m, and 0.10 m, and air pressure ranging from 0.0 atm to 1.0 atm.

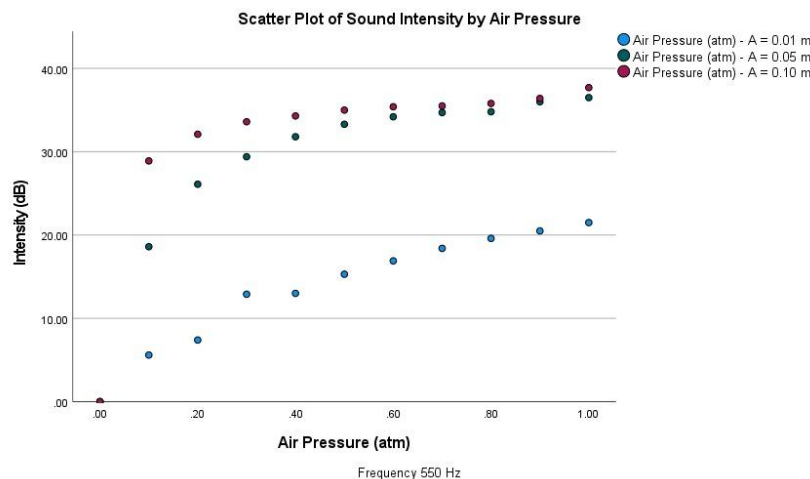


Figure 9. Graph of the Relationship Between Sound Intensity and Air Pressure

Figure 9 shows that for all three amplitude levels, the sound intensity is 0.0 dB at an air pressure of 0.0 atm. As air pressure increases, the sound intensity (dB) rises significantly (Pinochet et al., 2021). The most rapid increase occurs at low pressure levels, after which the rate of increase in dB becomes less steep, although the intensity continues to rise. Higher amplitudes consistently produce higher dB values at every air pressure above zero. This confirms that a medium is necessary for the propagation of sound waves, and the relationship between air pressure and sound intensity (dB) is nonlinear (Costa et al., 2023).

Analysis of the Influence of Amplitude and Frequency on Sound Wave Intensity

The research results show that the sound intensity increases along with the increase in amplitude. This finding aligns with the basic principle that the intensity (I) of a wave is proportional to the square of its amplitude (A). This means that doubling the amplitude results in an increase in intensity (power per unit area) by a factor of four. The decibel (dB) scale is logarithmic and is used to express the ratio between a certain amplitude value and a reference value. The general formula for calculating decibels is:

$$dB = 10 \log_{10} \frac{P}{P_0} \quad (1)$$

Where P is the power or sound intensity being measured, and P_0 is the reference power or intensity, which is usually the human hearing threshold of 10^{-12} watts per square meter (watt/m^2). Sound intensity measurements using the Phyphox application can show both positive and negative values. Positive values ($dB > 0$) indicate that the sound amplitude is greater than the reference value, meaning the sound is loud or strong, such as a car horn reaching around 100 dB . A zero value ($dB = 0$) means the sound amplitude is equal to the reference value. This does not mean there is no sound, but rather a very faint sound exactly at the threshold of human hearing. Negative values ($dB < 0$) indicate that the sound amplitude is less than the reference value, meaning the sound is very weak or almost inaudible, like a soft whisper in a very quiet room.

Consequently, although the actual sound energy increases significantly with amplitude, the perceived loudness (related to dB) increases more slowly (Zagubień & Wolniewicz, 2024). The “flattening” phenomenon observed in the dB versus Amplitude graphs (Figures 4, 5, 6) at higher amplitudes is a manifestation of logarithmic scaling (Fajarwati et al., 2023). For

example, an increase in intensity from 10^{-6} W/m^2 to 10^{-5} W/m^2 (a tenfold increase) corresponds to a 10 dB . However, an increase from 10^{-3} W/m^2 to $2 \times 10^{-3} \text{ W/m}^2$ (a twofold increase) only corresponds to an increase of about 3 dB . This explains why large changes in amplitude at high intensity levels result in smaller dB increases compared to similar proportional changes at low intensity levels (Fajarwati et al., 2023). For instance, if the amplitude is doubled, the intensity increases fourfold, and the change in dB would be:

$$10\log(4I_1/I_0) - 10\log(I_1/I_0) = 10\log(4) \approx 6 \text{ dB} \quad (2)$$

The experimental data also show that for a constant amplitude, higher frequencies generally produce higher sound intensities. This is consistent with the theoretical relationship:

$$I = \frac{1}{2} \rho v (\omega s_{\max})^2 \quad (3)$$

where $\omega = 2\pi f$ is the angular frequency and $s_{\max}$ is the maximum displacement amplitude. If ρ and v is constant (e.g. in air), then $I \propto (\omega s)^2 = (2\pi f s)^2$, means that the intensity increases quadratically with frequency and amplitude. For a constant amplitude, the intensity is proportional to the square of the frequency. A higher frequency means more wave cycles passing a point per unit time. If the deviation per cycle (amplitude) is the same, then more cycles mean more energy delivered per unit time, resulting in higher power and intensity (Costa et al., 2023).

Relative value f^2 of each If the frequency value is against 400 Hz as a reference. At 400 Hz, the squared value of the frequency is $400^2=160000$, which is normalized to 1.00. At 500 Hz, the squared value of the frequency is $500^2=250000$, or about 1.56 times greater than 400 Hz. Meanwhile, for 600 Hz, $600^2=360000$, or 2.25 times greater than 400 Hz. However, the PhET simulation results show that the intensity at 600 Hz actually increases more on a linear scale than 400 Hz.

This considerable difference is likely due to several factors. First, although the amplitude is set as "maximum" in the simulation, the particle displacement (s) may not be exactly the same between frequencies. If the value of s at 600 Hz is slightly larger, so its square (s^2) will have a significant impact on the increase in intensity. Secondly, the way waves propagate in the simulation could be affected by the characteristics of the virtual medium, so waves at higher frequencies such as 600 Hz may experience smaller attenuation or a more focused propagation shape, resulting in greater intensity. Thirdly, it is possible that the representation of intensity in the PhET simulation is not completely linear with respect to $f^2 s^2$ instead, it mixes aspects of visualization with audio perception. This can lead to discrepancies between purely mathematical theoretical predictions and visual or numerical results from simulations.

The increase in intensity at 600 hz is more likely to be a result of the prevailing laws of physics, rather than an artifact of the simulation. This is supported by several reasons, firstly consistency with physical theory. Theoretically, the intensity of a sound wave follows the relationship $I \propto f^2 s^2$, where intensity is directly proportional to the square of amplitude and the square of frequency. Assuming the amplitude is fixed, an increase in frequency directly leads to an increase in intensity. In this case, the comparison between 600 hz and 400 hz predicts an increase of about 2.25 times, and the direction of the trend is reflected in the simulation results. The two patterns of intensity decrease with distance are reasonable. The data shows that the intensity decreases from near to far positions in a logical manner, following wave propagation principles such as the inverse square law of distance. This shows

that the simulation represents the energy propagation process realistically, rather than randomly or erroneously. Third, the stability of values between observation points. The intensities recorded at the near, medium and far points remained consistent at each frequency. Although there were slight fluctuations, there were no noticeable anomalies that would normally indicate numerical noise or graphical errors in the simulation. Fourth, the impact of small amplitude differences on intensity. If there is a small difference in the amplitude of the source at a frequency of 600hz-for example, because the "maximal" visualization setting is not identical across frequencies-then the impact on intensity can be very large, as intensity depends on the square of the amplitude. This may explain why the increase in intensity is higher than the theoretical prediction of f^2 course.

Thus, it can be concluded that the increase in intensity at a frequency of 600 Hz is a logical consequence of the laws of physics, and is influenced by propagation efficiency and possibly small variations in source amplitude.

Analysis of Reflection and Interference of Waves Due to Angle of Propagation

Experimental data consistently show that the angle of incidence is equal to the angle of reflection for various amplitudes and angles of incidence. Figure 8 clearly illustrates the wave interference phenomenon resulting from the superposition of incident and reflected sound waves. The incident sound wave travels from the left or right direction, while the reflected wave originating from the surface reflection travels from the opposite direction. When these two waves meet and interact, superposition occurs, which is the fusion of two waves that produces a new wave pattern called a standing wave. In these standing waves, two types of important points are formed, namely nodes and antinodes. Nodes(●) are points along the wave where the amplitude is always zero. This happens because the incident and reflected waves meet each other in opposite phases (180° phase difference), thus canceling each other out(minimum amplitude) a condition known as destructive interference. Destructive interference occurs when $\Delta s = (n + 1/2)\lambda$ where Δs denotes the difference in trajectory between the two waves, λ denotes the wavelength of the sound and n denotes an integer ($n = 1, 2, 3, \dots$). In contrast, antinode points are those points where the amplitude of the waves reaches a maximum value. This point is formed when the two waves meet in the same phase, so their amplitudes amplify each other, resulting in constructive interference. Constructive interference occurs when $\Delta s = n\lambda$. The resulting standing wave pattern shows that the distance between two consecutive nodes or two consecutive antinodes is half a wavelength ($\lambda/2$).

Figure 8a shows clear constructive and destructive interference, forming a pattern that resembles a standing wave. This occurs because the incident and reflected waves travel in directly opposite directions, resulting in fixed points with maximum and minimum deviation. (Mahardhika & Darsono, 2024). Figure 8b and Figure 8c show how changing the angle of the reflecting surface changes the geometry of the interference pattern. The constructive and destructive interference regions are spatially redistributed based on the angle of reflection, creating a more complex pattern of skewed edges. This is because the difference in trajectory between the incident and reflected waves arriving at a particular point changes with the angle of reflectance.

Analysis of the Effect of Air Pressure on Sound Wave Intensity

Experimental results show that the sound intensity is zero at zero air pressure, regardless of the source amplitude. This confirms that sound, as a mechanical wave, requires a medium

for propagation. Without air particles to oscillate and transfer energy, sound cannot propagate (Vishnu et al., 2023).

The sound intensity (I) is related to the pressure amplitude of the sound wave (Δp_{sound}), the density of the medium (ρ), and the speed of sound in the medium (v) through the equation:

$$I = \frac{(\Delta p_{\text{sound}})^2}{2\rho v} \quad (4)$$

The term ρv is the characteristic acoustic impedance (Z) of the medium. Air pressure is directly related to air density (ρ) assuming constant temperature, through the ideal gas law. As air pressure increases, density increases, resulting in higher acoustic impedance.

The graph in Figure 9 shows that as air pressure increases from zero, sound intensity also rises significantly. This indicates a more efficient energy transfer from the sound source to the medium and through the medium. At very low pressure, the medium is sparse, leading to poor energy transfer. As pressure increases, the medium becomes denser, allowing for better coupling and more effective propagation of sound energy. Sound is a vibration of particles; more particles mean the transfer of vibrational energy is more efficient (Costa et al., 2023). Acoustic impedance represents the medium's resistance to acoustic flow. The data shows intensity increases with pressure, indicating the medium's improved capacity to carry sound energy. A study by Vishnu et al. (2023) on underwater noise emissions, although in a different medium, underscores the importance of the medium's properties in sound generation and propagation.

The observed non-linear increase in dB with rising air pressure (Figure 9) can be attributed to fundamental physics and the logarithmic nature of the dB scale. Even the presence of a small amount of medium initially allows sound propagation, leading to a large relative increase from zero intensity. As pressure (and density) continues to increase, the absolute intensity keeps rising, but the dB increment becomes smaller for equivalent linear changes in pressure, especially if the relationship between pressure and actual intensity itself is non-linear (Pinochet et al., 2021). Research on sound propagation under various atmospheric conditions often considers the effects of pressure, temperature, and humidity on absorption and speed, which in turn influence intensity over distance.

Implications of Research Based on PhET Simulations

Simulation using PhET allows controlled manipulation of variables and visualization of concepts that are difficult to observe directly in traditional laboratories. The effectiveness of PhET in enhancing conceptual understanding has been documented in various studies (Nuryantini et al., 2021). However, PhET simulations are idealizations of real-world conditions. The simulations may not account for all factors affecting sound propagation, such as air turbulence, complex reflections from uneven surfaces, or the full spectrum of atmospheric absorption effects. The representation of wave interactions and medium properties may be simplified. For example, the exact algorithm by which the "amplitude" setting in PhET translates to physical displacement or pressure amplitude, and how "air pressure" affects density and sound speed, might involve underlying assumptions not fully transparent to users. Additionally, the simulation may not include all relevant variables that can influence sound characteristics in real-world scenarios, such as humidity and temperature gradients (Nuryantini et al., 2021).

Advantages of the simulation include its ability to isolate variables and demonstrate core principles. However, this control comes at the cost of potentially oversimplifying the rich acoustic complexities of the real world. PhET aims to effectively teach fundamental concepts by simplifying reality and removing distracting variables (Mahardhika & Darsono, 2024). For example, in reflection simulations, the walls are likely perfect reflectors, and the medium is perfectly homogeneous. In reality, surfaces absorb and scatter sound, and the air exhibits micro variations. This means that although the simulation accurately demonstrates the principles of reflection and interference, precise quantitative results may differ from physical experiments due to real-world imperfections. Findings from the simulation should be understood as illustrations of fundamental concepts, and caution is necessary when directly extrapolating quantitative results to specific and complex real-world applications without further validation (Nuryantini et al., 2021). This research could be expanded by comparing simulation results with physical experiments or more advanced computational acoustic models to assess the degree of idealization within PhET.

CONCLUSION

The research findings show that sound intensity increases non-linearly on the decibel scale with rising amplitude and frequency. Greater amplitude produces higher wave energy, while higher frequency accelerates the rate of energy transfer. In terms of geometry, the angle of reflection is proven to be equal to the angle of incidence, in accordance with the law of reflection, while the dispersion angle influences complex interference patterns resulting from the superposition of incident and reflected waves. An increase in air pressure also leads to a non-linear rise in sound intensity, reinforcing the crucial role of the medium in sound propagation.

The PhET simulation has proven effective in visualizing fundamental acoustic principles but has limitations due to the idealization of physical conditions. Therefore, direct physical experiments, such as using a pressurized chamber to validate the effect of pressure on sound intensity, are recommended to improve the accuracy of results. Furthermore, future studies should consider other environmental variables such as temperature and humidity, as these factors can affect the speed and intensity of sound wave propagation, yet were not covered in this simulation. A combination of simulations, physical experiments, and advanced computational modeling will offer a more comprehensive understanding of acoustic phenomena under real-world conditions.

REFERENCES

- Amelia, N., Kusumaningtyas, N. C., HF, A. R., Sulistiyowati, A., & Mufida, J. (2023). Rancang Bangun Alat Praktikum Resonansi Bunyi Dengan Menentukan Cepat Rambat Bunyi Di Udara Pada Pipa Kecil dan Pipa Besar. *Jurnal Ilmiah Wahana Pendidikan*, 9(14), 546-552.
- Bosia, F., Dal Poggetto, V. F., Gliozzi, A. S., Greco, G., Lott, M., Miniaci, M., Ongaro, F., Onorato, M., Seyyedizadeh, S.F., Tortello, M. & Pugno, N. M. (2022). Optimized structures for vibration attenuation and sound control in nature: A review. *Matter*, 5(10), 3311-3340.
- Costa, J. P., Baptista, M., Conceição, T., & Maurício, P. (2023). Construct map development for the propagation of sound in the air. *EURASIA Journal of Mathematics, Science and Technology Education*, 19(9), em2327.
- Eka, O. (2023). *Pengembangan e-modul fisika pada materi gelombang berbasis mitigasi kebencanaan di SMA/MA kelas XI*. (Doctoral dissertation, UIN Raden Intan Lampung).

- Fajarwati, L., Feriadi, Y., & Widjiati, E. (2023). Underwater Acoustic Intensity Analysis using Noise Assisted-MEMD with Varying Distances. *Jurnal Teknik Elektro*, 15(1), 24-29.
- Fitri, N. A., Sa'adah, N., Fikriya, S., Suryandari, K. C., & Fatimah, S. (2023). Analisis Gelombang Bunyi Melalui Alat Peraga Sederhana dan Relevansinya dalam Pembelajaran di SD. In *Social, Humanities, and Educational Studies (SHES): Conference Series* (Vol. 6, No. 1, pp. 617-624).
- Kho, W. K. (2014). Studi material bangunan yang berpengaruh pada akustik interior. *Dimensi Interior*, 12(2), 57-64.
- Kurniawan, A., Herlinawati, H., & Marasabessy, R. (2024). Pemanfaatan PhET colorado untuk meningkatkan hasil belajar siswa pada materi rangkaian listrik. *Asian Journal Collaboration of Social Environmental and Education*, 1(2).
- Ledjab, F. A. W., Koli, K., Tahu, M. V. F., & Dewa, E. (2024). Inovasi Pembelajaran Fisika: Integrasi Problem Based Learning dan Simulasi PhET pada Materi Gelombang Bunyi. *MAGNETON: Jurnal Inovasi Pembelajaran Fisika*, 2(2), 112-119.
- Li, M., Wang, M., Ding, R., Deng, T., Fang, S., Lai, F., & Luoi, R. (2021). Study of acoustic emission propagation characteristics and energy attenuation of surface transverse wave and internal longitudinal wave of wood. *Wood Science and Technology*, 55, 1619-1637.
- Machado, M. R., & Dos Santos, J. M. C. (2021). Effect and identification of parametric distributed uncertainties in longitudinal wave propagation. *Applied Mathematical Modelling*, 98, 498-517.
- Mahardhika, S. R., & Darsono, T. (2024). Pengembangan Modul Praktikum Interferensi Gelombang Bunyi Berbantuan Visual Analyser. *Unnes Physics Education Journal*, 13(1), 9-14.
- Maulana, S. (2020). Pengaruh Perubahan Temperatur terhadap Respon Amplitudo dengan Menggunakan Gelombang Ultrasonik pada Pola Aliran Slug Pipa Horisontal. *Jurnal Inovasi Mesin*, 2(2), 43-50.
- Muhtar, E. (2022). Pengaruh Pendekatan Ketrampilan Proses Dalam Meningkatkan Hasil Belajar Fisika Pada Konsep Getaran Dan Gelombang Pada Peserta Didik Kelas VIII SMP Negeri 17 Halmahera Selatan. *KUANTUM: Jurnal Pembelajaran Dan Sains Fisika*, 3(1), 38-62.
- Muin, M. P. (2023). *Metode penelitian kuantitatif*. CV Literasi Nusantara Abadi.
- Mulyaningsih, R. S. (2024). Effect of amplitude and frequency on the speed of sound waves in air and water using PhET simulation. *Jurnal Pendidikan dan Ilmu Fisika*, 4(1), 40.
- Nuryantini, A. Y., Zakwandi, R., & Ariyuda, M. A. (2021). Home-made simple experiment to measure sound intensity using smartphones. *Jurnal Ilmiah Pendidikan Fisika Al-Biruni*, 10(1), 159-166.
- Pinochet, J., Cortada, W. B., & Peña, M. S. (2021). Graphic relation between amplitude and sound intensity level. *The Physics Teacher*, 59(6), 467-469.
- Qowiyyah, S. N. (2022). Kemakbulan Doa dalam Perspektif Al-Qur'an dan Fisika Gelombang. *Qaf: Jurnal Ilmu Al-Qur'an dan Tafsir*, 4(1), 45-67.
- Rijal, M. (2024). *Pengembangan Buku Saku Elektronik Berbasis Google Sites pada Materi Gelombang Bunyi dan Cahaya Tingkat SMA/MA* (Doctoral dissertation, UIN Ar-Raniry Banda Aceh).
- Rismawan, H., & Aisiyah, M. C. (2023). Menentukan Nilai Periode, Amplitudo, Frekuensi Dan Memvisualisasi Getaran Harmonik Pada Pegas Dalam Bentuk Gelombang. *Jurnal Fisika: Fisika Sains Dan Aplikasinya*, 8(1), 25-29.

- Siregar, D. A. (2022). Pengaruh penggunaan metode demonstrasi terhadap hasil belajar fisika siswa pada materi pokok gelombang bunyi kelas XII di SMA Negeri Batang Onang. *Jurnal Physics Education (PhysEdu)*, 4(3), 11.
- Vishnu, H., Deane, G. B., Glowacki, O., Chitre, M., Johnson, H., Moskalik, M., & Stokes, D. (2023). Depth-dependence of the underwater noise emission from melting glacier ice. *JASA Express Letters*, 3(2).
- Widiansyah, M. G. (2021). Tutorial Praktikum Resonansi Gelombang Bunyi Menggunakan Teknologi Augmented Reality Dan Metode Fuzzy Mamdani. *Universitas Komputer Indonesia*.
- Zagubień, A., & Wolniewicz, K. (2024). Measurements and Analysis of Sound Reflections from Selected Building Façades. *Applied Sciences*, 14(24), 11627.