A classification model for student exchange using CART algorithm

by N/a N/a

Submission date: 19-Apr-2023 03:53PM (UTC+0700)

Submission ID: 2069182049

File name: A_classification_model_for_student_exchange_oo_artikel.pdf (919.21K)

Word count: 2750

Character count: 13346

PAPER · OPEN ACCESS

A classification model for student exchange using **CART** algorithm

To cite this article: W B Zulfikar et al 2021 IOP Conf. Ser.: Mater. Sci. Eng. 1098 032054

View the article online for updates and enhancements.

You may also like

7 Nitrogen and carbon limitation of planktonic primary production and phytoplankton-bacterioplankton coupling Antarctica Brian K Sorrell, Ian Hawes and Karl Safi

Forecasting Student Graduation With Classification And Regression Tree (CART) Algorithm A Maesya and T Hendiyanti

4 On the inversion of the Radon transform





ECS 244th Electrochemical Society Meeting

October 8 - 12, 2023 • Gothenburg, Sweden

50 symposia in electrochemistry & solid state science

Deadline Extended! Last chance to submit!

New deadline: April 21 submit your abstract!

This content was downloaded from IP address 202.80.212.22 on 19/04/2023 at 09:52

A classification model for student exchange using CART algorithm

12 B Zulfikar*, I Taufik, A R Atmadja and R P Rahayu
Department of Informatics, UIN Sunan Gunung Djati Bandung, Indonesia

*wildan.b@uinsgd.ac.id

Abstract. The university has a cooperative relationship with other universities including abroad. The cooperation program covers various fields, one of which is the academic field. Students have the opportunity to exchange information, science, and culture through student exchange programs. However, not all students are eligible to join this program because there are terms and conditions that must be met from various aspects such as academics, attitudes, and even financial conditions. The purpose of this study is to analyse and preprocess the training data and then model it in the form of classification using CART. Based on the test results, the proposed model provides satisfactory results with an accuracy percentage of 90%.

1. Introduction

Student Exchange is organized by certain parties for providing opportunities for students to study abroad within a certain period. This has many benefits, especially for students who are participants in the student exchange program. This program is effective for challenging students in developing a global perspective [1–4].

Currently, tertiary institutions in Indonesia are organizing student exchange programs. Based on observations, the discovery of facts that occur in the process of acceptance of student exchange participants. There were also unilateral resignations by prospective participants. As for the participants were not prepared technically and non-technically as well as about funding. The purpose of this study is to minimize participants who are not eligible to join the student exchange program. There are not all students in a university are entitled to participate in student exchange programs. The organizer usually provides a limited amount of quota. However, every student has the same opportunity to participate in the selection process. There are, many conditions that must be fulfilled by students including GPA scores, making English essays, interviews using English as well as reading the Qur'an test (optional).

Data mining has several function such as classification, clustering, and association [5,6]. CART [6] lassification And Regression Tree) is one classification method of data mining [7–11]. It will produce a classification tree if the response variables are categorical, and produce a regression tree if the response variables are continuous [7,12]. The main purpose of CART [6] to obtain an accurate group of data as a characteristic of a classification. The distinctive feature of the [6] RT algorithm is that the decision node is always two-pronged or binary forked. In its implementation, a record will be classified into one of the many classifications available on the destination variable based on the values of the predictor variables.

doi:10.1088/1757-899X/1098/3/032054

The proposed model uses CART to classify the feasibility of prospective student exchange program participants. Based on previous research, this method has advantages namely, the accuracy is very qualified [13–18] and this method widely used on several field [19–21].

2. Research methods

CART is the algorithm used in this study. CART is an algorithm of a data explosing in technique, which is a decision tree technique. CART is a nonparametric statistical methodology developed for the topic of classification analysis, both for categorical and continuous response variables. The following right and left branch candidates will be used to make a decision tree shown in table 1.

Table 1. Left and right branch candidates.

No	Left Brach Candidate	Right Brach Candidate
1	GPA <3,3	GPA >=3,3
2	GPA <=3,5	GPA >3,5
3	Essay <70	Essay >=70
4	Essay <85	Essay >=85
5	Interview <85	Interview >=85
6	Qur'an <20	Qur'an >=20
7	Qur'an <35	Qur'an >=35
8	Income = Low	Income = Medium
9	Income = Medium	Income = High
10	Expertise Certificate = No	Expertise Certificate = Yes

The calculation of PL (Prior Left) and PR (Prior Right) is an implementation of equations (1) and (2).

$$P_{l} = \frac{\text{The number of notes on the left candidate}}{\text{Number of notes in the training data}} \tag{1}$$

$$P_r = \frac{The \ number \ of \ notes \ on \ the \ right \ candidate}{Number \ of \ notes \ in \ the \ training \ data} \tag{2}$$

$$P T_l = \frac{Number of records categorized on the left candidate}{The number of notes in the decree t}$$
(3)

$$PT_r = \frac{Number\ of\ records\ categorized\ on\ the\ right\ candidate}{The\ number\ of\ notes\ in\ the\ decree\ t} \tag{4}$$

In table 2 it can be seen that for the PL calculation results that are obtained from the amount of data that meets the criteria of the left branch candidate in the total amount of data. Then, PR is obtained from the amount of data that meets the criteria of the right branch candidate divided by the total data. The results of these calculations are presented in table 2.

Table 2. Result of PL and PR.

No	Left Branch Candidate	Right Branch Candidate	PL	PR
1	GPA <3,3	GPA >=3,3	0,067	0,933
2	GPA <=3,5	GPA > 3,5	0,267	0,733
3	Essay <70	Essay >= 70	0,067	0,933
4	Essay <85	Essay >=85	0,667	0,333
5	Interview <85	Interview $>=85$	0,467	0,533
6	Qur'an <20	Qur'an>=20	0,200	0,800
7	Qur'an <35	Qur'an>=35	1,000	0
8	Income Low	Income Low	0,067	0,933
9	Income Medium	Income High	0,800	0,200
10	Expertise Certificate =No	Expertise Certificate = Yes	0,400	0,600

doi:10.1088/1757-899X/1098/3/032054

 $P(j \mid tL)$ and $P(j \mid tR)$ are calculated using formulas (3) and (4). Table 3 shows the calculation results of $P(j \mid tL)$ and $P(j \mid tR)$.

Table 3. Calculation of P(j|tL) and P(j|tR).

No	Left Branch Candidate	Right Branch Candidate	P(LltL)	P(TLltL)	P(LltR)	P(TLltR)
1	GPA <3,3	GPA >= 3,3	0	1	0,571	0,429
2	GPA <=3,5	GPA >3,5	0,25	0,75	0,636	0,364
3	Essay <70	Essay >= 70	0	1	0,571	0,429
4	Essay <85	Essay >=85	0,3	0,7	1,000	0,000
5	Interview <85	Interview >=85	0	1	1,000	0,000
6	Qur'an <20	Qur'an >=20	0,333	0,667	0,583	0,417
7	Qur'an <35	Qur'an >=35	0,533	0,467	0	0
8	Income Low	Income Low	0,000	1,000	0,571	0,429
9	Income Medium	Income High	0,500	0,500	0,667	0,333
10	Expertise Certificate =No	Expertise Certificate = Yes	0,333	0,667	0,667	0,333

Tables 2 and 3 can be seen that the results of the calculation of $P(j \mid tL)$ with L status are obtained from the amount of data that meets the left branch candidate and the status L is divided by the total amount of data that meets the left branch candidate criteria. Likewise $P(j \mid tL)$ with the status of TL divided by the entire amount of data that meets the criteria of the left branch candidate. For $P(j \mid tR)$ L status is obtained from the amount of data that fulfils the criteria of the right branch candidate L status divided by the total amount of data that meets the criteria of the right branch candidate, as well as $P(j \mid tR)$ TL status.

Table 4. Calculation of goodness.

No	Left Branch Candidate	Right Branch Candidate	i(tL)	i(tR)	Gini Index	Goodness
1	GPA <3,3	GPA >=3,3	0	0,490	0,498	0,041
2	GPA <=3,5	GPA >3,5	0,37	0,463	0,498	0,058
3	Essay < 70	Essay >=70	0	0,490	0,498	0,041
4	Essay <85	Essay >=85	0,42	0,000	0,498	0,218
5	Interview <85	Interview >=85	0	0,000	0,498	0,498
6	Qur'an <20	Qur'an >=20	0,444	0,486	0,498	0,020
7	Qur'an <35	Qur'an >=35	0,498	0	0,498	0
8	Income Low	Income Low	0,000	0,490	0,498	0,041
9	Income Medium	Income High	0,500	0,444	0,498	0,009
10	Expertise Certificate =No	Expertise Certificate = Yes	0,444	0,444	0,498	0,053

Based on table 4, it can be seen that branch number 5 has the greatest goodness value. Then, candidate branch 5 will be the first branch in the decision tree and so on.

3. Results and discussion

The testing phase is done to find out how the algorithm works and what the results of the algorithm's process are like. In the testing process, the training data used were 171 as many as 30% of the training data. The data has been classified and is original data obtained from the authorities of the rogram organizing university. This test is done by calculating the recall value to get a percentage of the ability of the algorithm to find information back with the following formula:

$$Recall = \frac{Amount \ of \ data \ classified \ correctly}{The \ actual \ amount \ of \ data} \tag{5}$$

doi:10.1088/1757-899X/1098/3/032054

Testing the quality of the algorithm in this study was carried out three times by using a varied dataset distribution as described below:

• Scenario A (Training data sharing and Data Testing by percentage 70% dan 30%)

$$Recall = \frac{47}{52} \times 100\% = 90\% \tag{6}$$

Scenario B (Training data sharing and Data Testing by percentage 50% dan 50%)

$$Recall = \frac{82}{86} \times 100\% = 95\% \tag{7}$$

• Scenario C (Training data sharing and Data Testing by percentage 40% dan 60%)

$$Recall = \frac{90}{104} \times 100\% = 86\% \tag{8}$$

Based on the three test scenarios above, it can be seen that the highest accuracy lies in the second test by dividing the percentage of 50% and 50%. While the smallest percentage is in the highest with the percentage of training data 40% and 60% testing data. It can be concluded that the amount of data entered either the amount of training data or testing data affects the results of accuracy. The final rule is detailed in figure 1.

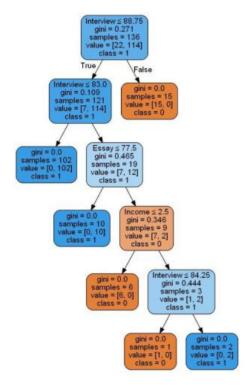


Figure 1. Final rule.

doi:10.1088/1757-899X/1098/3/032054

4. Conclusion

This proposed model can be used well in providing the prediction of student exchange participants. One of the variables or determinant factors used is GPA, income, essays, interviews, and others that can provide fairly accurate results. In the testing phase, all test scenarios show positive results. Further works, we suggest to improve this proposed model with any pitive determinant factor that is adjustable to any condition and policy. This model needs to compare with several classification methods such as C45, Support Vector Machine, J48, and so on.

References

- Leutwyler B and Lottenbach S 2011 Reflection on normality: The benefits of international student exchange for teacher education *Pains and gains of international mobility in teacher education* (Brill Sense) pp 59-77
- [2] Bevis T B 2019 The Student Exchange Boom Following World War II A World History of Higher Education Exchange (Cham.: Palgrave Macmillan) pp 135-169
- [3] Messer D and Wolter S C 2007 Are student exchange programs worth it? Higher Education 54(5) 647-663
- [4] Matuk C and Linn M C 2018 Why and how do middle school students exchange ideas during science inquiry? *International Journal of Computer-Supported Collaborative Learning* 13(3) 263-299
- [5] Zulfikar W B, Wahana A, Uriawan W and Lukman N 2016 Implementation of association rules with apriori algorithm for increasing the quality of promotion 2016 4th International Conference on Cyber and IT Service Management (IEEE) pp 1-5
- [6] Gerhana Y A, Zulfikar W B, Ramdani A H and Ramdhani M A 2018 Implementation of Nearest Neighbor using HSV to Identify Skin Disease IOP Conf. Ser. Mater. Sci. Eng 288(1) 012153
- [7] Boerstler H and de Figueiredo J M 1991 Prediction of use of psychiatric services: Application of the CART algorithm The journal of mental health administration 18(1) 27-34
- [8] Batra M and Agrawal R 2018 Comparative analysis of decision tree algorithms *Nature inspired computing* (Singapore: Springer) pp 31-36
- [9] Bhawiyuga A, Kartikasari D P, Amron K, Pratama O B and Habibi M 2019 Architectural design of IoT-cloud computing integration platform *Telkomnika* 17(3) 1399
- [10] Zulfikar W B, Irfan M, Alam C N and Indra M 2017 The comparation of text mining with Naive Bayes classifier, nearest neighbor, and decision tree to detect Indonesian swear words on Twitter 2017 5th International Conference on Cyber and IT Service Management (CITSM) (IEEE) pp 1-5
- [11] Setiawati D, Taufik I, Jumadi J and Zulfikar W B 2016 Klasifikasi Terjemahan Ayat Al-Quran Tentang Ilmu Sains Menggunakan Algoritma Decision Tree Berbasis Mobile *Jurnal Online Informatika* 1(1) 24-27
- [12] Bhargava N, Dayma S, Kumar A and Singh P 2017 An approach for classification using simple CART algorithm in WEKA 2017 11th International Conference on Intelligent Systems and Control (ISCO) (IEEE) pp 212-216
- [13] Zimmerman R K, Balasubramani G K, Nowalk M P, Eng H, Urbanski L, Jackson M L ... and Malosh R E 2016 Classification and Regression Tree (CART) analysis to predict influenza in primary care patients BMC infectious diseases 16(1) 503
- [14] Jing R, Zhang Q, Wang B, Cui P, Yan T and Huang J 2019 CART-based fast CU size decision and mode decision algorithm for 3D-HEVC Signal, Image and Video Processing 13(2) 209-216
- [15] Bar-Hen A, Gey S and Poggi J M 2015 Influence measures for CART classification trees Journal of Classification 32(1) 21-45
- [16] Lemon S C, Roy J, Clark M A, Friedmann P D and Rakowski W 2003 Classification and regression tree analysis in public health: methodological review and comparison with logistic regression Annals of behavioral medicine 26(3) 172-181

IOP Conf. Series: Materials Science and Engineering

1098 (2021) 032054

doi:10.1088/1757-899X/1098/3/032054

- [17] Li M 2017 Application of CART decision tree combined with PCA algorithm in intrusion detection 2017 8th IEEE International Conference on Software Engineering and Service Science (ICSESS) (IEEE) pp 38-41
- [18] Yan H, Hu H and Yu P 2019 A Study on Push Technology of Intelligent Agriculture Service Information Based on CART Algorithm 2019 International Conference on Robots & Intelligent System (ICRIS) (IEEE) pp 258-260
- [19] Li Y, Khan M Y A, Jiang Y, Tian F, Liao W, Fu S and He C 2019 CART and PSO+ KNN algorithms to estimate the impact of water level change on water quality in Poyang Lake, China Arabian Journal of Geosciences 12(9) 287
- [20] Rai S, Khandelwal N and Boghey R 2020 Analysis of Customer Churn Prediction in Telecom Sector Using CART Algorithm First International Conference on Sustainable Technologies for Computational Intelligence (Singapore: Springer) pp 457-466
- [21] Bianco S, Ciocca G and Cusano C 2009 Color constancy algorithm selection using CART International Workshop on Computational Color Imaging (Berlin, Heidelberg: Springer) pp 31-40

A classification model for student exchange using CART algorithm

	ALITY REPORT				
2	9% ARITY INDEX	26% INTERNET SOURCES	21% PUBLICATIONS	14% STUDENT PAPERS	
PRIMAR	RY SOURCES				
1	Submitt Bandun Student Pape	_	n Gunung DJat	7%	
2	WWW.re Internet Sour	searchgate.net		6%	
3	A Lawi, S L Wungo, S Manjang. "On identifying the irregularities of electricity customer behaviors using soft computing approach", Journal of Physics: Conference Series, 2019 Publication				
4	Balabra Rao, D.	ya Sagar, J Kavit hmeswara Kada B. K. Kamesh. "F vithin a Cloud Us	iru, M. Venkato RETRACTED: D	etecting	

5

Publication

Evi Ramadhani, Syarifah H. Merashky, Bagus Sartono, Alfian F Hadi, Winny D. Safitri, Teuku Akhdansyah. "Analysis of identification of

Techniques", IOP Conference Series: Materials

Science and Engineering, 2020

2%

food insecure household characteristics based on regional status in Aceh province", AIP Publishing, 2022

Publication

ijiis.org 1 % Internet Source D Ahmad, F Tasman, A Anzira. "A Simple Mathematical Model of Pollutant Transfers on Ponds with Single Water Source", Journal of Physics: Conference Series, 2020 **Publication** Aditya Nugraha, Raudhatul Rafiqah 1 % 8 Assyahiddini, Randy Efra Saputra, Casi Setianingsih, Nurhafidz Farid Abdul Aziz. "Smart Lamp Control Based on User Behavior for Two Lamps Using Classification and Regression Tree (CART) Algorithm", 2022 IEEE 8th International Conference on Smart Instrumentation, Measurement and Applications (ICSIMA), 2022 **Publication** www.semanticscholar.org Internet Source Submitted to Pennsylvania College of 10 **Technology** Student Paper

www.ieomsociety.org

Agung Wahana, Wildan Budiawan Zulfikar, 1 % 12 Wildan Najah Wildiansyah, Aldy Rialdy Atmadja, Diena Rauda Ramdania, Beki Subaeki. "A Deep Learning Approach To Analyze The Sentiment Of Online Game Users", 2021 7th International Conference on Wireless and Telematics (ICWT), 2021 Publication "Proceedings of the 4th International **1** % 13 Conference on Electrical and Information Technologies for Rail Transportation (EITRT) 2019", Springer Science and Business Media LLC, 2020 Publication "IT Convergence and Security 2017", Springer <1% Science and Business Media LLC, 2018 **Publication** <1% dspace.ut.ee Internet Source "Artificial Intelligence and Security", Springer 16 Science and Business Media LLC, 2020 Publication W.B. Zulfikar, Y.A. Gerhana, A.F. Rahmania. <1% 17 "An Approach to Classify Eligibility Blood

Donors Using Decision Tree and Naive Bayes

Classifier", 2018 6th International Conference on Cyber and IT Service Management (CITSM), 2018

Publication



Exclude quotes

Off

Exclude matches

Off

Exclude bibliography On